

TWENTY
FIFTEEN



WEVER & DUCRÉ
LIGHTING

LIFE IS
TOO SHORT
FOR BORING
LIGHTING

La vie est trop courte pour une lumière morne



WEVER & DUCRÉ
LIGHTING

FROM BELGIUM WITH LOVE

Tasty waffles and chocolates, prepared with love – these are Belgium's claims to fame. Right? Well, that's not all. For some years now, Belgium has also been famous for trendy luminaires. Our mission as a luminaire manufacturer is to provide such trendsetting lighting systems to discerning customers, helping them to create sophisticated spaces, provide better light, and improve their quality of life. And we do it with a healthy dose of passion. Thanks to their modern designs, our luminaires not only look dazzling on the outside, they also have special qualities inside: the latest generation of LEDs. LEDs save both space and energy, making them a perfect solution for today's world.

We find our source of inspiration in the needs of our customers. This approach demands and encourages our full creative energy. Our luminaires contain innovative technological features as well as time-tested materials and methods. We won't turn the world inside out – but we might turn it on its head a bit. We boldly and enthusiastically dive into new challenges, and hope that we can capture your imagination as well.

Welcome to our world.

La Belgique est connue pour ses gaufres et son chocolat, délicieux et préparés avec amour. Mais est-ce bien tout? Pas tout à fait. Depuis quelque temps, la Belgique s'impose également sur la scène de l'éclairage moderne. En tant que fabricant d'éclairage, notre mission est d'intégrer cet esprit d'avant-garde aux espaces urbains, leur assurant une meilleure luminosité, aux clients les plus exigeants, et pour une meilleure qualité de vie. Le tout étayé d'une bonne dose de passion. De par leurs designs modernes, nos lampes sont non seulement éblouissantes, mais possèdent également des richesses intérieures bien spéciales: des LED nouvelle génération. Peu encombrantes, elles contribuent à la protection des ressources naturelles, s'inscrivant ainsi parfaitement dans l'air du temps.

Nous puisons notre inspiration dans les différents besoins de nos clients. Ils défient et encouragent notre créativité. Nos lampes intègrent à la fois des innovations technologiques et des principes éprouvés. Nous n'avons pas la prétention de transformer le monde - mais peut-être de le chambouler un peu. Avec courage et enthousiasme, nous nous attaquons à de nouveaux défis et espérons vous entraîner avec nous.

Bienvenue dans notre monde.

Köstliche und mit Liebe zubereitete Waffeln und Schokolade – dafür ist Belgien berühmt. Stimmt? Nicht ganz. Seit einiger Zeit steht Belgien auch für trendige Leuchten. Genau solche Trendsetter für urbane Räume, für besseres Licht, für Menschen mit Ansprüchen und für noch mehr Lebensqualität anzubieten – das ist unsere Mission als Leuchtenhersteller. Und zwar mit einer gehörigen Portion Leidenschaft. Dank ihres modernen Designs sehen unsere Leuchten aber nicht nur blendend aus, sondern haben auch besondere innere Werte: LEDs der jüngsten Generation. Das spart Platz und schont Ressourcen. Passt also perfekt in die heutige Zeit.

Unsere Inspirationsquelle sind die Bedürfnisse unserer Kunden. Das fordert und fördert unsere ganze Kreativität. Technologische Innovationen finden sich in unseren Leuchten genauso wie Bewährtes. Wir werden die Welt nicht umkrempeln – aber vielleicht ein wenig auf den Kopf stellen. Mit Mut und Begeisterung stürzen wir uns in neue Herausforderungen und hoffen dich mitreißen zu können.

Willkommen in unserer Welt.



flandria® flandria



WAFELS & DINGES



Apple & Caramel Dinges

Wafels & Dinges

WERKLUST

hard work, travail intense

VERTROUWEN

trust, confiance

ENTHOUSIASME

enthusiasm, enthousiasme

DURF

courage, courage

CREATIVITEIT

creativity, créativité

Every story needs a starting point. Ours began in the early 80's, when a handful of young Belgians decided to start a lighting company. So far, so good. But what name should they give to this new company? This is an issue in Belgium, since it has several official languages, including Flemish and French. The founders of the company didn't want to choose one or the other, so there was only one option left: The name had to fit phonetically into both worlds. During their lively discussions on the topic, the young entrepreneurs then chanced upon a document that would play a decisive role in the company's history: a roadmap, as it were, that explained in five points how to be successful in life – through hard work, trust, and enthusiasm, combined with courage and the necessary dose of creativity. This is our foundation and it has been our company philosophy, from then until now.

Toute histoire naît quelque part. La nôtre commença au début des années 80, alors qu'une poignée de jeunes Belges décida de créer une entreprise d'éclairage. Jusque là, tout allait bien. Mais quel nom allaient-ils lui donner? En Belgique, on parle plusieurs langues officielles - flamand et français, entre autres - et les fondateurs de l'entreprise ne voulaient opter ni pour l'une, ni pour l'autre, une seule solution s'ouvrait à eux: le nom devait être phonétiquement acceptable dans les deux langues. Au cours d'un débat animé, un document qui devait tenir un rôle crucial dans l'histoire de l'entreprise tomba par hasard entre les mains de nos jeunes entrepreneurs: un guide expliquant en cinq points comment réussir dans la vie - par le travail, la confiance, l'enthousiasme, beaucoup de courage et une bonne dose de créativité. Nous en avons fait notre base et notre philosophie d'entreprise. Cela encore aujourd'hui.

Jede Geschichte braucht einen Anfang. Unsere beginnt in den frühen Achzigern, als eine Handvoll junger Belgier beschließt, eine Leuchtenfirma zu gründen. So weit so gut. Doch welchen Namen sollte das Unternehmen bekommen? Da in Belgien mehrere Amtssprachen – u.a. Flämisch und Französisch – gesprochen werden und sich die Firmengründer weder für die eine noch für die andere entscheiden wollten, blieb nur eine Möglichkeit übrig: Der Name sollte phonetisch in beiden Welten zuhause sein. Bei der lebhaften Diskussion fiel den Jungunternehmern dann zufällig ein Schriftstück in die Hände, das eine entscheidende Rolle in der Firmengeschichte übernehmen sollte: ein Leitfaden, der in fünf Punkten erklärt, wie man im Leben erfolgreich ist – durch harte Arbeit, Vertrauen, Begeisterung, gepaart mit Mut und einer gehörigen Portion Kreativität. Das ist unsere Basis und unsere Firmenphilosophie. Bis heute.

WEVER & DUCRÉ

LIGHTING

LET
THERE
BE
LIGHT

Que la lumiere soit

WHAT A FEELING

GET TURNED ON

Want to warm things up a bit at a candle-light dinner? We can't guarantee that sparks will fly between two people, but one thing we can do – and do really well – is to fill a room with cheerful light that can create just the right mood for romance. That's because we are one of the few lighting companies to offer 2200 K LEDs.

THE RIGHT LIGHT FOR THE RIGHT MOOD

You want variety? So do we. We invite you to enjoy the variety that life offers, and adjust your lighting just the way you want it. Whether you like things cosy, neutral, or on the cool side – we have just what you need. The key lies in the colour temperature, which is measured in Kelvin (K). The lower this value, the warmer the perceived light. The higher the colour temperature, the cooler light appears. We offer you warm candlelight atmosphere (2200 K), classic living room light (2700 K), and cool clarity at 3000 K.

GOOD TO KNOW

Another important parameter for light quality is the CRI (colour rendering index) that can lie between 0 and 100. It is an index of how natural colours appear when being exposed to artificial light. LEDs with a higher CRI reflect colours more naturally and more pleasingly to the human eye. Objects which are illuminated by LEDs with a CRI higher than 80, make the colours appear as if they were brightened by a natural source of light.

FAIRE NAÎTRE L'ÉTINCELLE

Un dîner aux chandelles devrait être l'occasion de frémir à l'unisson... Bien que nous ne puissions pas garantir la naissance d'une étincelle entre deux personnes, nous savons comment plonger avec talent une pièce banale dans un éclairage d'ambiance festif. En effet, nous sommes l'un des rares fournisseurs de LED de 2200 K.

L'ÉCLAIRAGE IDÉAL POUR L'ATMOSPHÈRE IDÉALE

Vous aimez la variété ? Nous aussi. Exploitez la richesse que la vie peut vous offrir, et agencez votre éclairage exactement comme vous le souhaitez. Convivial, plutôt neutre ou sobre, voire froid nous avons exactement ce qu'il vous faut. L'élément de sélection le plus important est la température de couleur, mesurée en degrés Kelvin (K). Plus cette valeur est basse, plus l'éclairage donne une sensation de chaleur. Plus la température de couleur est élevée, plus l'éclairage apparaît froid. Nous proposons des atmosphères chaleureuses imitant la lumière des chandelles (2200 K), la luminosité classique d'une pièce de vie aux couleurs naturelles (2700 K) ou encore une clarté sobre de 3000 K.

BON À SAVOIR

La qualité de la lumière dépend également de l'IRC (Colour Rendering Index = indice de rendu des couleurs), qui peut varier entre 0 et 100. Il s'agit de l'indice de l'état naturel des couleurs exposées à la lumière artificielle. Les LED à l'IRC élevé promettent des couleurs d'autant plus naturelles et agréables à l'œil humain. Les couleurs des objets éclairés par des LED à l'IRC de 80 et plus apparaissent comme baignés d'une source de lumière naturelle.

MACHT DICH RICHTIG AN

Es soll bei einem Candle-Light-Dinner so richtig knistern? Wir können zwar nicht dafür sorgen, dass der Funke zwischen zwei Menschen überspringt, aber einen Raum in eine festliche und stimmungsvolle Beleuchtung tauchen, das können wir und zwar richtig gut. Wir sind nämlich einer der wenigen Leuchtenanbieter von LEDs mit 2200 K.

DAS RICHTIGE LICHT FÜR DIE RICHTIGE STIMMUNG

Du stehst auf Abwechslung? Wir auch. Nutze also die Vielfalt, die dir das Leben bietet, und setze deine Leuchten genau so ein, wie du willst. Egal ob behaglich, eher neutral oder nüchtern, kühl – wir haben das Passende für dich. Das wichtigste Stellrad ist dabei die Farbtemperatur, die in Kelvin (K) gemessen wird. Je niedriger dieser Wert ist, desto wärmer empfindest du die Beleuchtung. Je höher die Farbtemperatur, desto kühler wirkt Licht. Wir bieten dir warme Candle-Light-Stimmung (2200 K), klassisches Wohnraumlicht (2700 K) und nüchterne Klarheit bei 3000 K.

GUT ZU WISSEN

Wichtig für die Lichtqualität ist auch der CRI (Colour Rendering Index = Farbwiedergabewert), der zwischen 0 und 100 liegen kann. Er ist ein Index für die Natürlichkeit von Farben, die künstlichem Licht ausgesetzt sind. LEDs mit einem größeren CRI geben Farben umso natürlicher und angenehmer fürs menschliche Auge wieder. Gegenstände, die mit LEDs mit einem CRI ab 80 beleuchtet werden, lassen die Farben so wirken, als würden sie von einer natürlichen Lichtquelle bestrahlt werden.

**2200 K
POUR DES HEURES
DE ROMANTISME**

Les LED de cette température offrent un confort des plus purs. Ils inondent vos pièces d'une ambiance de coucher de soleil, avec la douceur des chandelles, sans allumer de bougies.



2200 K FOR ROMANTIC MOMENTS

LEDs with this colour temperature stand for extreme cosiness. They create a sunset mood within your own four walls and provide a candlelight atmosphere without candles.

2200 K FÜR ROMANTISCHE STUNDEN

LEDs mit dieser Farbtemperatur stehen für pure Behaglichkeit. Sie sorgen für eine Sonnenuntergangsstimmung in den eigenen vier Wänden und für Kerzenlicht ganz ohne Kerzen.

2700 K POUR UN ÉCLAIRAGE DE SALON CLASSIQUE

Si vous aimez les températures de couleur plus froides, mais en souhaitant tout de même jouir d'une ambiance conviviale, les LED de 2700 K sont idéales. Elles constituent un éclairage classique et flexible, parfait dans toutes les pièces de votre maison, du séjour à la salle de bains en passant par la chambre à coucher.

2700 K KLASSISCHES WOHNRAUMLICHT

Wer etwas kühlere Farbtemperaturen mag und es trotzdem gemütlich haben will, sollte LEDs mit 2700 K den Vorzug geben. Sie stehen für klassisches Wohnraumlicht, das flexibel eingesetzt werden kann - vom Wohnzimmer über das Schlafzimmer bis hin zum Bad.

2700 K CLASSIC LIVING SPACE LIGHTING

Those who prefer cooler colour temperatures and still want to have it cosy should go for LEDs at 2700 K. They represent the classic living space lighting that is flexible and can be used in living rooms, bedrooms, and bathrooms alike.

3000 K NEW CLARITY


Are you somebody who prefers cosiness with a touch of cooler lighting? In this case the LEDs with this colour temperature are the perfect choice for you. They provide a pleasant balance between brightness and cosiness.

3000 K POUR UNE SOBRIÉTÉ NOUVELLE

Associez-vous plutôt le confort avec une luminosité plus claire? Si oui, les LED de cette température de couleur sont exactement ce qu'il vous faut: elles offrent un bel équilibre entre clarté et confort.

3000 K NEUE NÜCHTERNHEIT

Bist du jemand, der Gemütlichkeit mit etwas kälterem Licht bevorzugt? Dann sind LEDs mit dieser Farbtemperatur genau das Richtige für dich: Sie sorgen für eine angenehme Balance zwischen Klarheit und Gemütlichkeit.

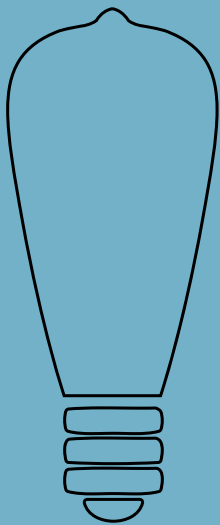

CARBON FILAMENT 100 W

THE ORIGINAL

The carbon filament lamp, with its extremely warm light, began to replace the then-dominant gas light around 1880. This makes it the mother of all electric lamps – the undisputed original, which literally lit the way to the present.

De par sa lumière extrêmement chaude, l'ampoule à filament de carbone remplaça dès 1880 l'éclairage à gaz jusqu'alors utilisé. Elle est bel et bien la mère de toutes les lampes électriques - l'originale incontestée, dont la puissance lumineuse se perpétue littéralement aujourd'hui.

Mit ihrem extrem warmen Licht ersetzte die Kohlefadenlampe ab etwa 1880 das damals vorherrschende Gaslicht. Sie ist damit die Mutter aller elektrischen Lampen – das unumstrittene Original, dessen Strahlkraft im wahrsten Sinne des Wortes bis heute reicht.


GOOD TO KNOW



1.2 lm/W luminous efficacy
2200 K colour temperature
500 to 800 hours operating life

*Efficacité lumineuse : 1,2 lm/W
Température de couleur : 2200 K
500 à 800 heures de fonctionnement*

1,2 lm/W Lichtausbeute
2200 K Farbtemperatur
500 bis 800 Betriebsstunden

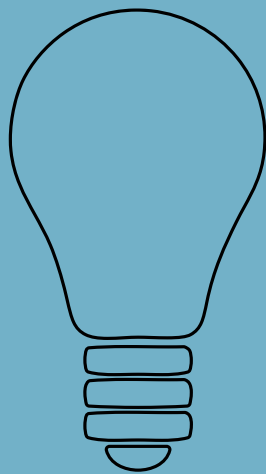

INCANDESCENT LAMP 75 W

THE CLASSIC

Incandescent lamps are power guzzlers. Why? Because they convert only 5% of the used energy quantity into light – the rest becomes heat. Thus, in 2012 – two years after the 130th birthday of the incandescent lamp – it was time to say goodbye: Incandescent lamps were removed from the market within the European Union.

Les lampes à incandescence sont énergivores. Pourquoi ? Parce qu'elles ne convertissent efficacement que 5% de l'énergie consommée en lumière et le reste en chaleur. 2012 - deux ans après le 130ème anniversaire de la lampe à incandescence, il était temps de s'en séparer ; elle a donc été retirée du marché au sein de l'UE.

Glühlampen sind Stromfresser. Warum? Weil sie nur 5% der eingesetzten Energiemenge tatsächlich in Licht umwandeln – der Rest ist Wärme. 2012 – zwei Jahre nach dem 130. Geburtstag der Glühlampe – hieß es daher Abschied nehmen: Sie wurde innerhalb der EU vom Markt genommen.


GOOD TO KNOW



12 lm/W luminous efficacy
2700 K colour temperature
1,000 hours operating life

*Efficacité lumineuse : 12 lm/W
Température de couleur : 2700 K
1000 heures de fonctionnement*

12 lm/W Lichtausbeute
2700 K Farbtemperatur
1.000 Betriebsstunden



HALOGEN 50 W

THE SUCCESSOR

The halogen lamp is a refinement of the classic incandescent lamp: version 2.0, so to speak. Despite the fact that it generates light in the same way, its halogen-filled bulb and an energy reflecting layer make it much more economical.

La lampe halogène représente une évolution de la lampe à incandescence classique ; la version 2.0 de la lampe classique, pour ainsi dire. Malgré un mode de production de lumière quelque peu similaire, elle fonctionne grâce à un piston rempli de gaz halogène et à une couche réfléchissante d'énergie, et est beaucoup plus économique.

Die Halogenlampe ist eine Weiterentwicklung der klassischen Glühlampe: Die 2.0-Version des Lampenklassikers also. Trotz gleicher Art der Lichterzeugung arbeitet sie dank halogenes gas gefüllter Kolben und einer energiereflektierenden Schicht aber viel wirtschaftlicher.


GOOD TO KNOW



10-19 lm/W luminous efficacy
2700-2800 K colour temperature
2,000 to 4,000 hours operating life

*Efficacité lumineuse : 10-19 lm/W
Température de couleur: 2700-2800 K
2000 à 4000 heures de fonctionnement*

10-19 lm/W Lichtausbeute
2700-2800 K Farbtemperatur
2.000 bis 4.000 Betriebsstunden



FLUORESCENT 28 W

THE SECOND PLACE

To put it plainly, the energy-saving lamp is an ecological disaster because nobody has yet found a way to properly dispose of the mercury contained in the long fluorescent tubes. Still its service life of 10,000 hours was by far the longest of all.

Cette lampe à économie d'énergie est clairement étiquetée comme une catastrophe écologique, car le mercure contenu dans les tubes fluorescents ne peut pas, à ce jour, être éliminé sans danger. Cependant, elle a su convaincre jusqu'à présent par une durée de vie supérieure à la moyenne de 10 000 heures.

Drastisch ausgedrückt ist die Energiesparlampe ein ökologisches Desaster, denn das in längeren Leuchtstoffröhren enthaltene Quecksilber kann bisher nicht sachgemäß entsorgt werden. Aber dennoch überzeugte sie bisher durch ihre überdurchschnittlich hohe Lebensdauer von 10.000 Betriebsstunden.

GOOD TO KNOW



40-60 lm/W luminous efficacy
2700, 3000, and 4000 K colour temperature
10,000 hours operating life

*Efficacité lumineuse : 40-60 lm/W
Température de couleur : 2700, 3000 et 4000 K
10 000 heures de fonctionnement*

40-60 lm/W Lichtausbeute
2700, 3000 und 4000 K Farbtemperatur
10.000 Betriebsstunden

LEDS SHINE SO BRIGHT



LED 8 W

THE PERFORMER

Since the days of Edison, the good old incandescent lamp has put out more heat than light. But that's history now. Today, modern lighting systems are not only making our houses much more efficient, they are also sparing our pocketbooks. This is because an LED has a luminous efficacy 18 times greater than an incandescent lamp, and thanks to a directed light pattern, it is significantly easier to focus in different directions. Not to mention its durability: Once you buy an LED, it lasts a lifetime. This is why we at Wever & Ducré rely mainly on lighting with LEDs. Because we really want you to see the light.

Depuis l'époque d'Edison, la bonne vieille ampoule à incandescence a bien plus chauffé qu'éclairé. Elle fait maintenant partie de l'histoire ancienne. Aujourd'hui, les sources de lumière modernes éclairent non seulement nos maisons plus efficacement, mais surtout elles ménagent nos comptes en banque. En effet, pensez-y: une LED contient 18 fois la puissance lumineuse d'une ampoule à incandescence, et, grâce à son rayonnement lumineux ciblé, elle est beaucoup plus flexible. Sans parler de sa longévité: achetez une LED, elle durera toute une vie. C'est pourquoi, chez Wever & Ducré, nous préférons utiliser les LED comme moyen d'éclairage. Pour que la lumière soit, vraiment!

Seit Edisons Zeiten hat die gute alte Glühbirne mehr eingeheizt als geleuchtet. Das ist nun Geschichte. Heute erhellen moderne Leuchtmittel nicht nur unsere Behausungen wesentlich effizienter, sondern schützen vor allem unser Konto. Denn merke: Eine LED hat die 18-fache Lichtausbeute der Glühbirne und ist dank gerichteter Lichtabstrahlung deutlich besser lenkbar. Von der Haltbarkeit ganz zu schweigen: Einmal gekauft, hält die LED ein Leben lang. Deshalb setzen wir bei Wever & Ducré mit einem Leuchtmittelanteil vorrangig auf LED. Damit dir wirklich ein Licht aufgeht.

Thinking about the many advantages of LEDs almost takes one's breath away: extremely high energy efficiency, long operating life, no maintenance, environmentally friendly, progressively dimmable, compact, etc. etc. ... and if you think that we're just trying to influence you, don't be fooled. LEDs simply have a number of advantages, and they are the future. See for yourself.

Pendant l'énumération des nombreux avantages des LED, le souffle nous manque: une efficacité énergétique exceptionnellement élevée, une longue durée de vie, entretien inutile, respect de l'environnement, à luminosité variable, aspect compact et bien plus encore... Vous auriez tort de penser que nous essayons de vous endoctriner! Les LED ont tout simplement de multiples atouts - elles incarnent l'avenir. Laissez-vous convaincre.

Zählt man die vielen Vorteile von LEDs auf, fällt Luftholen schwer: äußerst hohe Energieeffizienz, langlebig, wartungsfrei, umweltfreundlich, stufenlos dimmbar, kompakt und und und ... Falls du nun glaubst, wir versuchen dich zu beeinflussen, täuschst du dich. LEDs haben einfach viele Vorteile - sie sind die Zukunft. Überzeuge dich selbst.

GOOD TO KNOW



Up to 180 lm/W luminous efficacy
1600-3000 K colour temperature
50,000 hours operating life

*Efficacité lumineuse : jusqu'à 180 lm/W
Température de couleur : 1600-3000 K
50 000 heures de fonctionnement*

*Bis 180 lm/W Lichtausbeute
1600-3000 K Farbtemperatur
50.000 Betriebsstunden*

BEST CHOICE



YOUR CHOICE

TURN ME ON

WITH A TURN OF THE WRIST FROM 0 TO 100

Let's get the party started – or will it be a cosy dinner with friends? No matter what your plans are, our lamp adapts to every situation. You can select any ambiance from candlelight romantic to full power with a phase control rotary dimmer. But that's not all! Thanks to its LED technology, it is extremely energy-efficient and long lasting. And it is easily dimmable with no additional installation effort.

DE 0 À 100 EN UN TOUR DE MAIN


Que la fête commence! Ou peut-être préférez-vous plutôt un diner agréable entre amis? Quelles que soient vos intentions, nos luminaires s'adaptent à chaque situation et veillent à créer l'atmosphère appropriée. L'utilisation d'un gradateur rotatif (en début de phase) vous garantit l'atmosphère parfaite en toutes circonstances et déploie sa pleine puissance de 0 à 100 en un clin d'œil. Mais ce n'est pas tout: grâce à sa technologie LED, il est vraiment très durable et extrêmement économe en termes d'énergie. La gradation de nos luminaires se fait très facilement et sans frais d'installation supplémentaires.

IM HANDUMDREHEN VON 0 AUF 100

Let's get the party started oder doch lieber ein gemütliches Abendessen mit Freunden? Egal was du vorhast, unsere Leuchte passt sich jeder Situation an. Sie kann auch mittels Drehdimmer (Phasenanschnitt) immer für die richtige Atmosphäre sorgen und entfaltet im Handumdrehen von 0 auf 100 ihre ganze Power – ein echter Stimmungsmacher eben. Doch nicht nur das: Dank ihrer LED-Technologie ist sie extrem energiesparend und ein echter Dauerbrenner. Ganz einfach dimmbar ohne zusätzlichen Installationsaufwand.

DIM ME SO SOFTLY

oh yeah.

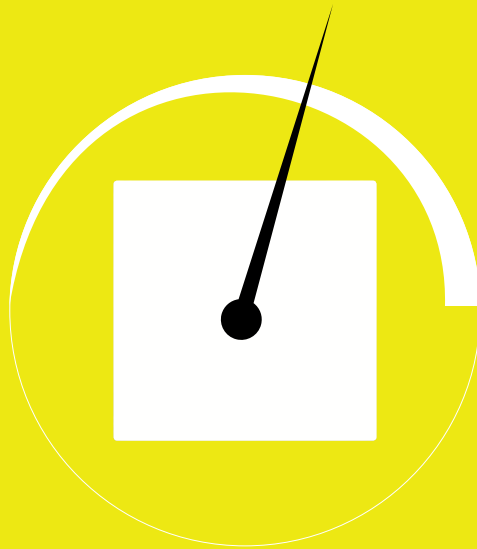

LED IT GLOW

from 0 up to 100.





ORDER
BY
2:30PM

FAST
AS
LIGHT

ALWAYS FAST DELIVERY

We're really fast, too. The dedication and love we put into the design and manufacture of our luminaires is also there when we bring them to you. That is why if we receive your order by 2:30 PM, subject to sales conditions, we can prepare your in-stock luminaires order for shipment the next day. We can't tell you how fast the courier who delivers them is going to be, but one thing we do know for sure:

They come fast and they come
FROM BELGIUM WITH LOVE!

LIVRAISON RAPIDE

Nous vous offrons un service de livraison rapide. En effet, avec le même dévouement et la même passion que nous concevons et fabriquons nos lampes, de même nous vous les expédierons. Ainsi, passez votre commande avant 14h 30, et selon les conditions de vente applicables, toutes nos lampes en stock seront prêtes à l'enlèvement dès le lendemain. Difficile de prévoir la vitesse du coursier qui vous les apportera. Mais une chose est sûre:

votre commande vous parviendra
rapidement, accompagnée de
BONS BAISERS DE BELGIQUE!

**LIEFERUNG KOMMT
PROMPT**

Wir sind tatsächlich flink. Denn mit derselben Hingabe und Liebe, mit der wir unsere Leuchten designen und fertigen, bringen wir sie auch zu dir. Deshalb: Erreicht uns deine Bestellung bis 14:30 Uhr, abhängig von den Verkaufsbedingungen, sind deine lagernden Leuchten am nächsten Tag abholbereit. Wie schnell der Kurier ist, der sie dir bringt, wissen wir nicht. Aber eines wissen wir mit Sicherheit:

*Sie kommt prompt und sie kommt
FROM BELGIUM WITH LOVE!*

CONTENT

INTERIOR

CEILING | WALL | FLOOR

16

EXTERIOR

CEILING | WALL | FLOOR

338






INTERIOR

take a look inside.

CEILING
RECESSED



RONY 021



RON 023



DEEP 029




PYRAMID 043



LUNA ROUND 047



LUNA SQUARE 049



PLANO 069



STRANGE 073



COCOZ 079



OBOQ 083



SLALOM 091



SPINO 093



PEEK 095

CEILING
SURFACE



PLUXO 109



SOLID 119



SIRRA 121



ROBY 125



CIRRUS 127




CORY 129




BOX 147



DOCUS 151



HEXO 157



RAY 163



BEBOW 165




J.J.W. 169




ELLO SYSTEM 171

CEILING
SUSPENDED




CONE 185




SIRRA 189



LYNER 193



CONCRETE 195



ROMANCE 197




ROBY 199



DOCUS 223



RAY 225



SIRRO 227



BEBOW 231



U80 235




BISHOP 237




CORK 241


WALL
RECESSED




SMILE IN 263




HYDRO 265




LITO 267



EYE 269




THEMIS 271




STRANGE 275


WALL
SURFACE



SMILE ON 285




SMILE 287



LIGHTDROP 289




MOON 291




CENTRAL 293




STATION 277




BOXmini 313



BOX 315




RAYmini 317



RAY 319



DOCUSmini 321




HEXOmini 323




CURVUS 325

INTERIOR

pick up your right light.



LITO 053




HIDE 055



CORY 059




CORO 063




SPYDER 097




SEEK 099



NOP 107




SIRRO 135




MUST 139




U80 141




CORO 143



ROB 173




SQUBE 175



GO-ON 181



PLUXO 183




PLUXO CLUST 201




NOA 205




J.J.W. 207




CORY 213




CIRRUS 215




BOX 219



HEXO 221




WIRO 243



ELLO 251




LOUIS 253




OCTONOM 255



MACBETH 257




GIGANT 259




STRIPE 281




BENTO 299



BENTA 301



LEENS 303



INCH 305




ARZY 307




WAHAA 309




TRAIN 311




MILES 327



YARD 329



J.J.W. 331



UNO 337



GO
AHEAD
→




1.0 LED


LED 7/10W | 350-500mA
COB 3-step | excl. power supply

CE 0.34kg  960° IP20  0,3°  1,36°

  102



 35°/35°  90

 355°  4-40



1.0 MR16


QR-CBC51 max. 50W | GU5.3
12V excl. transformer

CE 0.28kg  960° IP20  0,9°

  102



 35°/35°  75

 355°  4-40






1.0 PAR16


PAR16 max. 50W | GU10
220-240VAC | 50-60Hz

CE 0.32kg  960° IP20  0,9°

  102

 35°/35°  100

 355°  4-40



2200K | >80CRI | 315-465lm | 15Vf

 **110161W1**

 **110161B1**

2700K | >90CRI | 420-590lm | 18Vf

 **110161W3**

 **110161B3**

3000K | >90CRI | 470-640lm | 18Vf

 **110161W5**

 **110161B5**

 **110110W0**

 **110110S0**

 **110110B0**

ALWAYS USE

transformer
12V | 60W **90221902**

12V | 105W **90221903**

 **110120W0**

 **110120S0**

 **110120B0**

OPTIONAL

PAR16 LED GU10 6W phase-cut dim
2700K 390lm **901228W2**

3000K 410lm **901228W4**

PAR16 LED GU10 7W ambient white dim
1800-3000K **901229S9**

ALWAYS USE

power supply
350mA | 10W **90213402**

500mA | 10W **90214403**

power supply phase-cut dim
500mA | 15W **90224501**

more power supplies on page 474






1.0 LED


LED 7/10W | 350-500mA
COB 3-step | excl. power supply

CE 0.36kg  960° IP20  0,3A  36°

  102



 35°/35°  90



 355°  4-40



1.0 MR16


QR-CBC51 max. 50W | GU5.3
12V excl. transformer

CE 0.30kg  960° IP20  0,9A

  102



 35°/35°  75

 355°  4-40



1.0 PAR16


PAR16 max. 50W | GU10
220-240VAC | 50-60Hz

CE 0.34kg  960° IP20  0,9A

  102

 35°/35°  100

 355°  4-40



2200K | >80CRI | 315-465lm | 15Vf

 **111161W1**

 **111161B1**

2700K | >90CRI | 420-590lm | 18Vf

 **111161W3**

 **111161B3**

3000K | >90CRI | 470-640lm | 18Vf

 **111161W5**

 **111161B5**

 **111110W0**

 **111110S0**

 **111110B0**

ALWAYS USE

transformer
12V | 60W **90221902**

12V | 105W **90221903**

 **111120W0**

 **111120S0**

 **111120B0**

OPTIONAL

PAR16 LED GU10 6W phase-cut dim
2700K 390lm **901228W2**

3000K 410lm **901228W4**

PAR16 LED GU10 7W ambient white dim
1800-3000K **901229S9**

ALWAYS USE

power supply
350mA | 10W **90213402**

500mA | 10W **90214403**

power supply phase-cut dim
500mA | 15W **90224501**

more power supplies on page 474





2.0 LED


2xLED 7/10W | 350-500mA
COB 3-step | excl. power supply

CE 0.73kg 960° IP20 0,3 A 36°

102x210

35°/35° 90

355° 4-40



2.0 PAR16


2xPAR16 max. 50W | GU10
220-240VAC | 50-60Hz

CE 0.69kg 960° IP20 0,9

102x210

35°/35° 100

355° 4-40



2200K | >80CRI | 2x315-465lm | 15Vf

111261W1

111261B1

2700K | >90CRI | 2x420-590lm | 18Vf

111261W3

111261B3

3000K | >90CRI | 2x470-640lm | 18Vf

111261W5

111261B5

111220W0

111220B0

OPTIONAL

PAR16 LED GU10 6W phase-cut dim
2700K 390lm

901228W2

3000K 410lm

901228W4

PAR16 LED GU10 7W ambient white dim
1800-3000K

901229S9

ALWAYS USE

power supply
350mA | 10W

90213402

500mA | 10W

90214403

power supply phase-cut dim
500mA | 15W

90224501

more power supplies on page 474






RON

3.0 LED


3xLED 7/10W | 350-500mA | 18Vf
COB 3-step | excl. power supply

CE 1.08kg  960° IP20   A36°

  102x320



 35°/35°  90



 355°  4-40





3.0 PAR16


3xPAR16 max. 50W | GU10
220-240VAC | 50-60Hz

CE 1.02kg  960° IP20 

  102x320

 35°/35°  100

 355°  4-40



2700K | >90CRI | 3x420-590lm

 **111361W3**

 **111361B3**

3000K | >90CRI | 3x470-640lm

 **111361W5**


 **111361B5**

ALWAYS USE
power supply
350mA | 10W **90213402**

500mA | 10W **90214403**

power supply phase-cut dim
500mA | 15W **90224501**

more power supplies on page 474

 **111320W0**

 **111320B0**

OPTIONAL
PAR16 LED GU10 6W phase-cut dim
2700K 390lm **901228W2**

3000K 410lm **901228W4**

PAR16 LED GU10 7W ambient white dim
1800-3000K **901229S9**





DEEP


1.0 LED

LED 7/10W | 350-500mA | 18Vf
COB 3-step | excl. power supply

CE 0.31kg 960° IP20 0,3° 136°

100

76 4-30




1.0 MR16

QR-CBC51 max. 50W | GU5.3
12V excl. transformer

CE 0.25kg 960° IP20 0,9°

84

76 4-30



1.0 PAR16

PAR16 max. 50W | GU10
220-240VAC | 50-60Hz

CE 0.25kg 960° IP20 0,9°

89

76 4-30



3000K | >90CRI | 470-640lm

	112161W5
	112161S5
	112161B5

	112110W0
	112110S0
	112110B0

	112120W0
	112120S0
	112120B0

ALWAYS USE

power supply
350mA | 10W **90213402**

500mA | 10W **90214403**

power supply phase-cut dim
500mA | 15W **90224501**

ALWAYS USE

transformer
12V | 60W **90221902**

12V | 105W **90221903**

OPTIONAL

PAR16 LED GU10 6W phase-cut dim
2700K 390lm **901228W2**

3000K 410lm **901228W4**

PAR16 LED GU10 7W ambient white dim
1800-3000K **901229S9**

more power supplies on page 474







DEEP IP44


1.0 LED

LED 7/10W | 350-500mA | 18Vf
COB 3-step | excl. power supply

CE 0.31kg  960° IP44   A36°

  100

 76  4-30



3000K | >90CRI | 470-640lm



112261W5



112261S5



112261B5

ALWAYS USE

power supply
350mA | 10W **90213402**

500mA | 10W **90214403**

power supply phase-cut dim
500mA | 15W **90224501**

more power supplies on page 474




DEEP ADJUST

1.0 LED

LED 7/10W | 350-500mA
COB 3-step | excl. power supply

CE 0.23kg 960° IP20 0,3 38°

87
35°/35° 100
355° 4-30




1.0 MR16

QR-CBC51 max. 50W | GU5.3
12V excl. transformer

CE 0.17kg 960° IP20 0,9

87
35°/35° 90
355° 4-30




1.0 PAR16

PAR16 max. 50W | GU10
220-240VAC | 50-60Hz

CE 0.21kg 960° IP20 0,9

87
35°/35° 100
355° 4-30



2200K | >80CRI | 315-465lm | 15Vf

 **112361G1**

 **112361B1**

2700K | >90CRI | 420-590lm | 18Vf

 **112361W3**

 **112361S3**

 **112361G3**

 **112361B3**

3000K | >90CRI | 470-640lm | 18Vf

 **112361W5**

 **112361S5**

 **112361B5**

ALWAYS USE


power supply
350mA | 10W **90213402**

500mA | 10W **90214403**

power supply phase-cut dim
500mA | 15W **90224501**

more power supplies on page 474

 **112310W0**

 **112310S0**

 **112310B0**

ALWAYS USE

transformer
12V | 60W **90221902**

12V | 105W **90221903**

 **112320W0**

 **112320S0**

 **112320B0**

OPTIONAL

PAR16 LED GU10 6W phase-cut dim
2700K 390lm **901228W2**

3000K 410lm **901228W4**

PAR16 LED GU10 7W ambient white dim
1800-3000K **901229S9**





DEEP






DEEP ADJUST

1.0 LED111

LED 13W | 220-240V | 50-60Hz
AC-COB3-step | phase-cut dim

CE 0.65kg □ 960° IP20 $\approx 0,3$ Ⓟ $\wedge 38^\circ$

□ 177
↷ 35°/35° \square 100
↻ 355° \square 4-30




1.0 ES111

ES111 max. 75W | GU10
220-240V | VAC | 50-60Hz

CE 0.41kg □ 960° IP20 $\approx 0,9$

□ 177
↷ 35°/35° \square 145
↻ 355° \square 4-30




1.0 QR111

QR111 max. 75W | G53
12V excl. transformer

CE 0.41kg \square 960° IP20 $\approx 0,9$

□ 177
↷ 35°/35° \square 100
↻ 355° \square 4-30



2700K | >80CRI | 640lm

	112568W2
	112568B2

3000K | >80CRI | 680lm

	112568W4
	112568B4

	112520W0
	112520B0

	112530W0
	112530B0

OPTIONAL

ES111 LED GU10 13W phase-cut dim
2700K 530lm **901528S2**

3000K 540lm **901528S4**

ALWAYS USE

transformer
12V | 60W **90221902**

12V | 105W **90221903**





DEEP





DEEP ASYM

1.0 LED

LED 7/10W | 350-500mA
COB 3-step | excl. power supply

CE 0.25kg \varnothing 960° IP20 \approx 0,3 \varnothing \approx 36°

  87
 35°/35°  100
 355°  4-30



1.0 MR16

QR-CBC51 max. 50W | GU5.3
12V excl. transformer

CE 0.19kg \varnothing 960° IP20 \approx 0,9 \varnothing

  87
 35°/35°  90
 355°  4-30




1.0 PAR16

PAR16 max. 50W | GU10
220-240VAC | 50-60Hz

CE 0.23kg \varnothing 960° IP20 \approx 0,9 \varnothing

  87
 35°/35°  115
 355°  4-30







2200K | >80CRI | 315-465lm | 15Vf

	112461W1
	112461G1
	112461B1

	112410W0
	112410S0
	112410B0

	112420W0
	112420S0
	112420B0

2700K | >90CRI | 420-590lm | 18Vf

	112461W3
	112461S3
	112461G3
	112461B3

ALWAYS USE
transformer
12V | 60W

90221902

12V | 105W

90221903

OPTIONAL

PAR16 LED GU10 6W phase-cut dim

2700K 390lm **901228W2**

3000K 410lm **901228W4**

PAR16 LED GU10 7W ambient white dim

1800-3000K **901229S9**

3000K | >90CRI | 470-640lm | 18Vf

	112461W5
	112461S5
	112461B5

ALWAYS USE

power supply
350mA | 10W **90213402**

500mA | 10W **90214403**

power supply phase-cut dim
500mA | 15W **90224501**

more power supplies on page 474









PYRAMID

1.0 LED


LED 7/10W | 350-500mA | 18Vf
COB 3-step | excl. power supply

CE 0.28kg  960° IP20  0,3m  A36°

  102x102



 35°/35°  90


 355°  4-30



1.0 PAR16


PAR16 max. 50W | GU10
220-240VAC | 50-60Hz

CE 0.26kg  960° IP20  0,9m

  102x172




 35°/35°  115


 355°  4-30



2.0 LED


2xLED 7/10W | 350-500mA | 18Vf
COB 3-step | excl. power supply

CE 0.50kg  960° IP20  0,3m  A36°

  92x192



 35°/35°  90

 355°  4-30



2.0 PAR16


2xPAR16 max. 50W | GU10
220-240VAC | 50-60Hz

CE 0.46kg  960° IP20  0,9m

  92x192

 35°/35°  115

 355°  4-30



2700K | >90CRI | 420-590lm

 **113161W3**

3000K | >90CRI | 470-640lm

 **113161W5**

ALWAYS USE

power supply
350mA | 10W **90213402**

500mA | 10W **90214403**

power supply phase-cut dim
500mA | 15W **90224501**

more power supplies on page 474

 **113120W0**

OPTIONAL

PAR16 LED GU10 6W phase-cut dim
2700K 390lm **901228W2**

3000K 410lm **901228W4**

PAR16 LED GU10 7W ambient white dim
1800-3000K **901229S9**

2700K | >90CRI | 2x420-590lm

 **113261W3**

3000K | >90CRI | 2x470-640lm

 **113261W5**

ALWAYS USE

power supply
350mA | 10W **90213402**

500mA | 10W **90214403**

power supply phase-cut dim
500mA | 15W **90224501**

more power supplies on page 474

 **113220W0**

OPTIONAL

PAR16 LED GU10 6W phase-cut dim
2700K 390lm **901228W2**

3000K 410lm **901228W4**

PAR16 LED GU10 7W ambient white dim
1800-3000K **901229S9**

more power supplies on page 474





PYRAMID

1.0 LED111


LED 13W | 220-240V | 50-60Hz
AC-COB3-step | phase-cut dim

CE 0.75kg □ 960° IP20 $\approx 0,3$ $\approx 38^\circ$

□ 196x196

↷ 35°/35° □ 100

↻ 355° □ 4-30



1.0 ES111


ES111 max. 75W | GU10
220-240V | VAC | 50-60Hz

CE 0.51kg □ 960° IP20 $\approx 0,9$

□ 196x196

↷ 35°/35° □ 145

↻ 355° □ 4-30



1.0 QR111


QR111 max. 75W | G53
12V excl. transformer

CE 0.51kg □ 960° IP20 $\approx 0,9$

□ 196x196

↷ 35°/35° □ 100

↻ 355° □ 4-30



2700K | >80CRI | 640lm



113368W2

3000K | >80CRI | 680lm



113368W4



113320W0



113330W0

OPTIONAL

ES111 LED GU10 13W phase-cut dim

2700K 530lm

901528S2

3000K 540lm

901528S4

ALWAYS USE

transformer

12V | 60W

90221902

12V | 105W

90221903



LUNA ROUND


1.0 LED

LED 6/8W | 500-700mA | 9Vf
COB 3-step | excl. power supply

CE 0.24kg 960° IP44

110

80 2-25




1.0 QT12

QT12 max. 50W | GY6.35
12V excl. transformer

CE 0.24kg TE 960° IP44

110

80 2-25



3000K | >80CRI | 380-460lm

114181W4

114181I4

114181M4

114181B4

1141Q0W0

1141Q0I0

1141Q0M0

1141Q0B0

ALWAYS USE

power supply
500mA | 10W **90214403**

700mA | 10W **90215403**

power supply phase-cut dim
700mA | 10W **90225401**

more power supplies on page 474

OPTIONAL

plaster kit **90017101**

recessed housing **90012026**

ALWAYS USE

transformer
12V | 60W **90221902**

12V | 105W **90221903**

OPTIONAL

plaster kit **90017101**

recessed housing **90012026**





LUNA SQUARE


1.0 LED

LED 6/8W | 500-700mA | 9Vf
COB 3-step | excl. power supply

CE 0.25kg 960° IP44 0,3

110

76x76 2-25




1.0 QT12

QT12 max. 50W | GY6.35
12V excl. transformer

CE 0.25kg TE 960° IP44 0,9

110

76x76 2-25



3000K | >80CRI | 380-460lm

	114281W4
	114281I4
	114281M4
	114281B4

	1142Q0W0
	1142Q0I0
	1142Q0M0
	1142Q0B0

ALWAYS USE

power supply
500mA | 10W **90214403**

700mA | 10W **90215403**

power supply phase-cut dim
700mA | 10W **90225401**

more power supplies on page 474

OPTIONAL

plaster kit **90017102**

recessed housing **90012026**

ALWAYS USE

transformer
12V | 60W **90221902**

12V | 105W **90221903**

OPTIONAL

plaster kit **90017102**

recessed housing **90012026**





LUNA







LITO


1.0

LED 2/3W | 350-500mA | 6Vf
PCB 3-step | excl. power supply

CE 0.09kg \varnothing 960° IP40 \approx 0,3 lm

   35

 70x70  12-18




2.0

LED 2/3W | 350-500mA | 6Vf
PCB 3-step | excl. power supply

CE 0.09kg \varnothing 960° IP40 \approx 0,3 lm

   35

 70x70  12-18



3000K | >85CRI | 188-260lm

	145181W4
	145181A4
	145181B4

3000K | >85CRI | 188-260lm

	145281W4
	145281A4
	145281B4

ALWAYS USE

power supply
350mA | 6W **90213202**

500mA | 6W **90214201**


more power supplies on page 474

ALWAYS USE

power supply
350mA | 6W **90213202**

500mA | 6W **90214201**

more power supplies on page 474

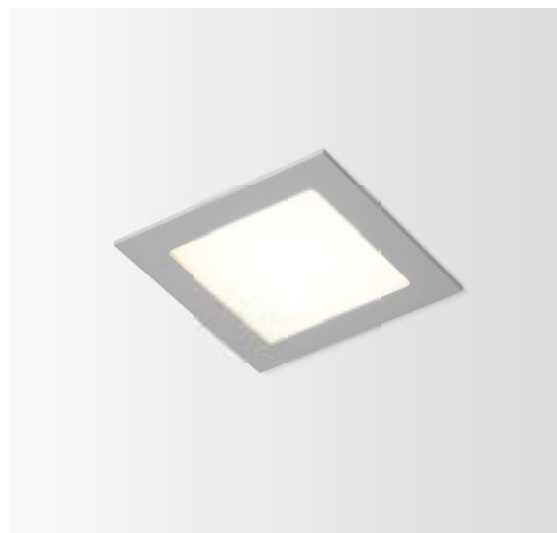







HIDE

1.0 LED

LED 7/10W | 350-500mA | 18Vf
COB 3-step | excl. power supply

CE 0.43kg 960° IP20 0,3 Λ 36°

-  45°/45°
-  145 45°/45°
-  0-25



2700K | >90CRI | 420-590lm

-  **117161W3**
-  **117161S3**
-  **117161B3**

3000K | >90CRI | 470-640lm

-  **117161W5**
-  **117161S5**
-  **117161B5**

ALWAYS USE




- power supply 350mA | 10W **90213402**
- 500mA | 10W **90214403**
- power supply phase-cut dim 500mA | 15W **90224501**


more power supplies on page 474

1.0 PAR16

PAR16 max. 50W | GU10
220-240VAC | 50-60Hz

CE 0.41kg 960° IP20 0,9


-  45°/45°
-  145 45°/45°
-  0-25




-  **117120W0**
-  **117120S0**
-  **117120B0**


OPTIONAL

- PAR16 LED GU10 6W phase-cut dim 2700K 390lm **901228W2**
- 3000K 410lm **901228W4**
- PAR16 LED GU10 7W ambient white dim 1800-3000K **901229S9**

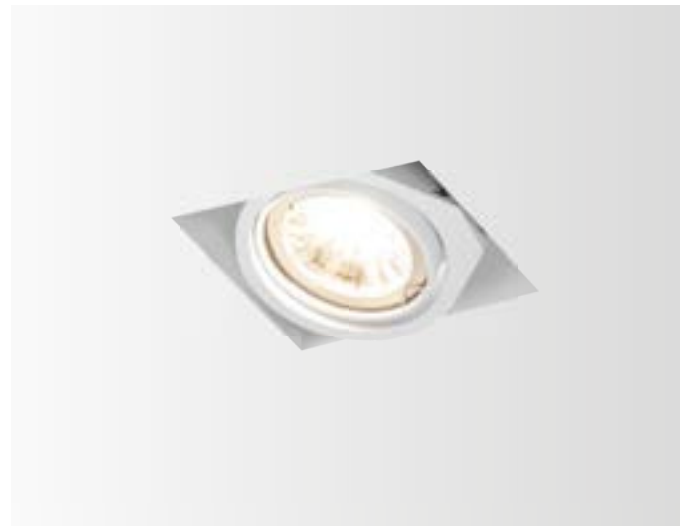


ALWAYS USE
recessed housing+plaster kit
one lamp | 111x111x117mm


 115x115



-  **90012009**
-  **90012017**

recessed housing+plaster kit
two lamps | 208x111x117mm


 212x115




-  **90012010**
-  **90012018**


recessed housing+plaster kit
three lamps | 302x111x117mm


 306x115



-  **90012011**
-  **90012019**

recessed housing+plaster kit
four lamps | 398x111x117mm

 402x115



-  **90012012**
-  **90012020**




HIDE

1.0 LED111

LED 13W | 220-240V | 50-60Hz
AC-COB 3-step | phase-cut dim

CE 0.93kg □ 960° IP20 $\approx 0,3$

- 45°/45°
- ☒ 215 ↻ 45°/45°
- ☒ 0-25



2700K | >80CRI | 640lm

	117268W2
	117268S2
	117268B2

3000K | >80CRI | 680lm


	117268W4
	117268S4
	117268B4

1.0 QR111

QR111 max. 75W | G53
12V excl. transformer

CE 0.73kg □ 960° IP20 $\approx 0,9$

- 45°/45°
- ☒ 215 ↻ 45°/45°
- ☒ 0-25




	117230W0
	117230S0
	117230B0

ALWAYS USE transformer 12V 60W	90221902
12V 105W	90221903

ALWAYS USE
recessed housing+plaster kit
one lamp | 171x171x179mm


☒ 175x175



	90012013
	90012021

recessed housing+plaster kit
two lamps | 327x171x179mm


☒ 331x175



	90012014
	90012022

recessed housing+plaster kit
three lamps | 482x171x179mm


☒ 485x175



	90012015
	90012023

recessed housing+plaster kit
four lamps | 638x171x179mm

☒ 640x175



	90012016
	90012024






0.9

LED 3W | 220-240VAC | 50-60Hz
PCB 3-step | incl. power supply

CE 0.27 kg ⊕ 960° IP20 $\approx 0,3$



3000K | >85CRI | 321lm



126173W4

3000K | >85CRI | 321lm | IP44





147173W4

1.3

LED 8W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim

CE 0.47 kg ⊕ 960° IP20 $\approx 0,3$



3000K | >85CRI | 783lm





126274W4

1.6

LED 12W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim

CE 0.52 kg ⊕ 960° IP20 $\approx 0,3$



3000K | >85CRI | 1284lm



126374W4

3000K | >85CRI | 783lm | IP44 | no dim





147373W4

1.9

LED 14W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim

CE 0.63 kg ⊕ 960° IP20 $\approx 0,3$



3000K | >85CRI | 1535lm



126474W4






2.1

LED 12W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim

CE 0.74kg ⊕ 960° IP20 $\approx 0,3\downarrow$

 70

 68  4-40




2.6

LED 16W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim

CE 0.99kg ⊕ 960° IP20 $\approx 0,3\downarrow$

 70


 90  4-40




3.4

LED 20W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim

CE 1.46kg ⊕ 960° IP20 $\approx 0,3\downarrow$

 70

 90  4-40



3000K | >85CRI | 1284lm



126574W4

3000K | >85CRI | 1820lm



126674W4

3000K | >85CRI | 2371lm



126774W4







CORO

0.8

LED 3W | 220-240VAC | 50-60Hz
PCB 3-step | incl. power supply

CE 0.26kg ⊕ 960° IP20 $\approx 0,3$



3000K | >85CRI | 321lm



127273W4

3000K | >85CRI | 321lm | IP44





148273W4

1.1

LED 8W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim

CE 0.37kg ⊕ 960° IP20 $\approx 0,3$



3000K | >85CRI | 783lm





127374W4

1.3

LED 12W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim

CE 0.45kg ⊕ 960° IP20 $\approx 0,3$



3000K | >85CRI | 1284lm



127474W4

3000K | >85CRI | 783lm | IP44 | no dim





148473W4

1.4

LED 14W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim

CE 0.48kg ⊕ 960° IP20 $\approx 0,3$



3000K | >85CRI | 1535lm



127574W4



CORO







CORO


1.6

LED 12W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim

CE 0.63kg ⊕ 960° IP20 $\approx 0,3$

☐ 70

Ⓟ 68 ▣ 4-40




2.0

LED 16W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim

CE 0.79kg ⊕ 960° IP20 $\approx 0,3$

☐ 70

Ⓟ 90 ▣ 4-40




2.5

LED 20W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim

CE 1.21kg ⊕ 960° IP20 $\approx 0,3$

☐ 70

Ⓟ 90 ▣ 4-40



3000K | >85CRI | 1284lm



127674W4

3000K | >85CRI | 1820lm



127774W4

3000K | >85CRI | 2371lm



127874W4





PLANO

1.0 LED


LED 7/10W | 350-500mA | 18Vf
COB 3-step | excl. power supply

CE 0.26kg TE 960° IP20 $\approx 0,3$

74x78

35°/35° 95

355° 2-18



1.0 PAR16


PAR16 max. 50W | GU10
220-240VAC | 50-60Hz

CE 0.24kg 960° IP20 $\approx 0,9$

74x78

35°/35° 120

355° 2-18



2.0 LED


2xLED 7/10W | 350-500mA | 18Vf
COB 3-step | excl. power supply

CE 0.48kg TE 960° IP20 $\approx 0,3$

74x148

35°/35° 95

355° 2-18



2.0 PAR16


2xPAR16 max. 50W | GU10
220-240VAC | 50-60Hz

CE 0.44kg 960° IP20 $\approx 0,9$

74x148

35°/35° 120

355° 2-18



2700K | >90CRI | 420-590lm

118161W3

118161S3

3000K | >90CRI | 470-640lm

118161W5

118161S5

2700K | >90CRI | 2x420-590lm

118120W0

118120S0

2700K | >90CRI | 2x420-590lm

118261W3

118261S3

3000K | >90CRI | 2x470-640lm

118261W5

118261S5

2700K | >90CRI | 2x420-590lm

118220W0

118220S0

ALWAYS USE

power supply
350mA | 10W **90213402**

500mA | 10W **90214403**

power supply phase-cut dim
500mA | 15W **90224501**

more power supplies on page 474

OPTIONAL

PAR16 LED GU10 6W phase-cut dim
2700K 390lm **901228W2**

3000K 410lm **901228W4**

PAR16 LED GU10 7W ambient white dim
1800-3000K **901229S9**

ALWAYS USE

power supply
350mA | 10W **90213402**

500mA | 10W **90214403**

power supply phase-cut dim
500mA | 15W **90224501**

more power supplies on page 474

OPTIONAL

PAR16 LED GU10 6W phase-cut dim
2700K 390lm **901228W2**

3000K 410lm **901228W4**

PAR16 LED GU10 7W ambient white dim
1800-3000K **901229S9**

OPTIONAL

plaster kit **90017104**

OPTIONAL

plaster kit **90017104**

OPTIONAL

plaster kit **90017105**

OPTIONAL

plaster kit **90017105**





PLANO

1.0 LED111


LED 13W | 220-240V | 50-60Hz
AC-COB 3-step | phase-cut dim

CE 0.65kg □ TE 96° IP20 $\approx 0,3$

□ 141x145

↻ 35°/35° 90

↻ 355° 2-18



1.0 ES111


ES111 max. 75W | GU10
220-240V | VAC | 50-60Hz

CE 0.41kg □ 96° IP20 $\approx 0,9$

□ 141x145

↻ 35°/35° 145

↻ 355° 2-18



1.0 QR111

QR111 max. 75W | G53
12V excl. transformer

CE 0.41kg □ TE 96° IP20 $\approx 0,9$

□ 141x145

↻ 35°/35° 90

↻ 355° 2-18



2700K | >80CRI | 640lm

□ **118368W2**

■ **118368S2**

3000K | >80CRI | 680lm

□ **118368W4**

■ **118368S4**

OPTIONAL
plaster kit **90017106**

□ **118320W0**

■ **118320S0**

OPTIONAL
ES111 LED GU10 13W phase-cut dim
2700K 530lm **901528S2**

3000K 540lm **901528S4**

OPTIONAL
plaster kit **90017106**

□ **118330W0**

■ **118330S0**

ALWAYS USE
transformer
12V | 60W **90221902**

12V | 105W **90221903**

OPTIONAL
plaster kit **90017106**









STRANGE

1.0 LED

LED 7/10W | 350-500mA | 18Vf
COB 3-step | excl. power supply

CE 0.45kg TE 960° IP20 $\approx 0,3$






-  86x86
-  35°/35°
-  355°
-  95
-  4-25




1.0 PAR16

PAR16 max. 50W | GU10
220-240VAC | 50-60Hz

CE 0.41kg 960° IP20 $\approx 0,9$






-  86x86
-  35°/35°
-  355°
-  120
-  4-25




2.0 LED

2xLED 7/10W | 350-500mA | 18Vf
COB 3-step | excl. power supply

CE 0.74kg TE 960° IP20 $\approx 0,3$





-  86x156
-  35°/35°
-  355°
-  95
-  4-25




2.0 PAR16

2xPAR16 max. 50W | GU10
220-240VAC | 50-60Hz

CE 0.70kg 960° IP20 $\approx 0,9$

-  86x156
-  35°/35°
-  355°
-  120
-  4-25



2700K | >90CRI | 420-590lm

-  **131161W3**
-  **131161B3**

3000K | >90CRI | 470-640lm

-  **131161W5**
-  **131161B5**

ALWAYS USE
plaster kit **90017116**

power supply
350mA | 10W **90213402**

500mA | 10W **90214403**

power supply phase-cut dim
500mA | 15W **90224501**

more power supplies on page 474

-  **131120W0**
-  **131120B0**

ALWAYS USE
plaster kit **90017116**

OPTIONAL
PAR16 LED GU10 6W phase-cut dim
2700K 390lm **901228W2**

3000K 410lm **901228W4**

PAR16 LED GU10 7W ambient white dim
1800-3000K **901229S9**

2700K | >90CRI | 2x420-590lm

-  **131261W3**
-  **131261B3**

3000K | >90CRI | 2x470-640lm

-  **131261W5**
-  **131261B5**

ALWAYS USE
plaster kit **90017117**

power supply
350mA | 10W **90213402**

500mA | 10W **90214403**

power supply phase-cut dim
500mA | 15W **90224501**

more power supplies on page 474

-  **131220W0**
-  **131220B0**

ALWAYS USE
plaster kit **90017117**

OPTIONAL
PAR16 LED GU10 6W phase-cut dim
2700K 390lm **901228W2**

3000K 410lm **901228W4**

PAR16 LED GU10 7W ambient white dim
1800-3000K **901229S9**





STRANGE





STRANGE

1.0 LED111


LED 13W | 220-240VAC | 50-60Hz
AC-COB 3-step | phase-cut dim

CE 1.03kg □ TE 960° IP20 $\approx 0,3$

□ 154x154

↷ 35°/35° ≈ 90

↻ 355° □ 4-25



1.0 ES111


ES111 max. 75W | GU10
220-240V | VAC | 50-60Hz

CE 0.75kg □ 960° IP20 $\approx 0,9$

□ 154x154

↷ 35°/35° ≈ 135

↻ 355° □ 4-25



1.0 QR111


QR111 max. 75W | G53
12V excl. transformer

CE 0.75kg □ TE 960° IP20 $\approx 0,9$

□ 154x154

↷ 35°/35° ≈ 90

↻ 355° □ 4-25



2700K | >80CRI | 640lm

□ **131368W2**

■ **131368B2**

3000K | >80CRI | 680lm

□ **131368W4**

■ **131368B4**

ALWAYS USE
plaster kit **90017118**

□ **131320W0**

■ **131320B0**

ALWAYS USE
plaster kit **90017118**

OPTIONAL
ES111 LED GU10 13W phase-cut dim
2700K 530lm **901528S2**

3000K 540lm **901528S4**

□ **131330W0**

■ **131330B0**

ALWAYS USE
plaster kit **90017118**

ALWAYS USE
transformer
12V | 60W **90221902**

12V | 105W **90221903**




COCOZ ROUND

1.0 LED111

LED 13W | 220-240VAC | 50-60Hz
AC-COB 3-step | phase-cut dim

CE 1.06 kg □ 960° IP20 $\approx 0,3$ Ⓟ $\wedge 38^\circ$

□ 152
↙ 25°/25° Ⓩ 170
↻ 365° ▨ 2-25




1.0 QR111

QR111 max. 75W | G53
12V excl. transformer

CE 0.78 kg Ⓢ TE 960° IP20 $\approx 0,9$ Ⓟ

□ 152
↙ 25°/25° Ⓩ 170
↻ 365° ▨ 2-25




1.0 HIR111

HIR-CE111 35/70W | GX8.5
220-240VAC | 50-60Hz | excl. ballast

CE 0.78 kg Ⓢ 960° IP20 $\approx 0,7$ Ⓟ

□ 152
↙ 25°/25° Ⓩ 170
↻ 365° ▨ 2-25



2700K | >80CRI | 640lm



3000K | >80CRI | 680lm



ALWAYS USE
transformer
12V | 60W **90221902**
12V | 105W **90221903**



ALWAYS USE
electronic ballast
35W **90219901**
70W **90219902**





COCOZ SQUARE

1.0 LED111


LED 13W | 220-240VAC | 50-60Hz
AC-COB3-step | phase-cut dim

CE 1.15 kg 960° IP20 $\approx 0,3$ P

145x145

25°/25° 180

365° 2-25



1.0 QR111


QR111 max. 75W | G53
12V excl. transformer

CE 0.87 kg TE 960° IP20 $\approx 0,9$

145x145

25°/25° 180

365° 2-25



1.0 HIR111


HIR-CE111 35/70W | GX8.5
220-240VAC | 50-60Hz | excl. ballast

CE 0.87 kg 960° IP20 $\approx 0,7$

145x145

25°/25° 180

365° 2-25



2700K | >80CRI | 640lm



119268J2



119268U2


3000K | >80CRI | 680lm



119268J4



119268U4



119230J0



119230U0



1192H0J0



1192H0U0

ALWAYS USE

transformer

12V | 60W

90221902

12V | 105W

90221903

ALWAYS USE

electronic ballast

35W

90219901

70W

90219902






OBOQ ROUND

1.0 LED111

LED 13W | 220-240VAC | 50-60Hz
AC-COB 3-step | phase-cut dim

CE 0.98kg □ 960° IP20 $\approx 0,3$ Ⓟ $\wedge 38^\circ$

□ 140
↘ 25°/25° ▮ 150
↻ 365° ▨ 2-25




1.0 QR111

QR111 max. 75W | G53
12V excl. transformer

CE 0.70kg Ⓢ TE 960° IP20 $\approx 0,9$ Ⓟ

□ 140
↘ 25°/25° ▮ 150
↻ 365° ▨ 2-25




1.0 HIR111

HIR-CEI11 35/70W | GX8.5
220-240VAC | 50-60Hz | excl. ballast

CE 0.70kg Ⓢ 960° IP20 $\approx 0,7$ Ⓟ

□ 140
↘ 25°/25° ▮ 165
↻ 365° ▨ 2-25



2700K | >80CRI | 640lm

	120168J2
	120168E2
	120168K2

3000K | >80CRI | 680lm

	120168J4
	120168E4
	120168K4

	120130J0
	120130E0
	120130K0

ALWAYS USE
transformer
12V | 60W

90221902
90221903

	1201H0J0
	1201H0E0
	1201H0K0

ALWAYS USE
electronic ballast
35W

90219901
90219902







OBOOQ



OBOQ SQUARE

1.0 LED111


LED 13W | 220-240VAC | 50-60Hz
AC-COB3-step | phase-cut dim

CE 1.02kg □ 960° IP20 $\rho_{0,3}$ $\rho_{1,38}$

□ 138x138

∩ 25°/25° ρ_{150}

↻ 365° ρ_{2-25}



1.0 QR111


QR111 max. 75W | G53
12V excl. transformer

CE 0.84kg ρ_{TE} 960° IP20 $\rho_{0,9}$

□ 138x138

∩ 25°/25° ρ_{150}

↻ 365° ρ_{2-25}



1.0 HIR111


HIR-CE111 35/70W | GX8.5
220-240VAC | 50-60Hz | excl. ballast

CE 0.84kg ρ_{960} IP20 $\rho_{0,7}$

□ 138x138

∩ 25°/25° ρ_{165}

↻ 365° ρ_{2-25}



2700K | >80CRI | 640lm

□ 120268J2

□ 120268E2

□ 120268K2

3000K | >80CRI | 680lm

□ 120268J4

□ 120268E4

□ 120268K4

□ 120230J0

□ 120230E0

□ 120230K0

ALWAYS USE

transformer

12V | 60W

12V | 105W

□ 90221902

□ 90221903

□ 90221903

□ 1202H0J0

□ 1202H0E0

□ 1202H0K0

ALWAYS USE

electronic ballast

35W

70W

□ 90219901

□ 90219902

□ 90219902

ALWAYS USE

electronic ballast

35W

70W







OBOOQ



SLALOM

1.0

QR-CB51 max. 50W | GU5.3
12V excl. transformer

CE 0.08kg \varnothing 960° IP20 \approx 0,9D

60

70 2-25



121110H0

121110M0

ALWAYS USE

transformer

12V | 60W

90221902

12V | 105W

90221903





SPINO

1.0 MR16

QR-CB51 max. 50W | GU5.3
12V excl. transformer

CE 0.35kg 960° IP20 0,9

82

45°/45° 65

355° 2-25



1.0 PAR16

PAR16 max. 50W | GU10
220-240VAC | 50-60Hz

CE 0.35kg 960° IP20 0,9

82

45°/45° 130

355° 2-18



ALWAYS USE

transformer
12V | 60W

90221902

12V | 105W

90221903

OPTIONAL

PAR16 LED GU10 6W phase-cut dim
2700K 390lm

901228W2

3000K 410lm

901228W4

PAR16 LED GU10 7W ambient white dim
1800-3000K

901229S9







PEEK

0.6


LED 5/7W | 350-500mA | 13Vf
COB 3-step | excl. power supply

CE 0.92kg | 960° IP20 | 0.3 | 360°

150

30°/30° 90

355° 4-25



0.8


LED 7/10W | 350-500mA | 18Vf
COB 3-step | excl. power supply

CE 0.96kg | 960° IP20 | 0.3 | 360°

150

30°/30° 90

355° 4-25



3000K | >80CRI | 350-465lm

 **123161W4**

 **123161E4**

3000K | >90CRI | 470-640lm

 **123261W5**

 **123261E5**

ALWAYS USE

power supply
350mA | 6W

90213202

500mA | 10W

90214403

more power supplies on page 474

ALWAYS USE

power supply
350mA | 10W

90213402

500mA | 10W

90214403

power supply phase-cut dim

500mA | 15W

90224501

more power supplies on page 474





SPYDER

1.0 LED


LED 7/10W | 350-500mA | 18Vf
COB 3-step | excl. power supply

CE 1.10kg | 960° IP20 | 0,3 | 36°

145

85° 90

355° 4-25



1.0 PAR16


PAR16 max. 50W | GU10
220-240VAC | 50-60Hz

CE 1.10kg | 960° IP20 | 0,9 | 36°

145

85° 90

355° 4-25



2700K | >90CRI | 420-590lm

124161W3

124161E3

3000K | >90CRI | 470-640lm

124161W5

124161E5

ALWAYS USE

power supply
350mA | 10W **90213402**

500mA | 10W **90214403**

power supply phase-cut dim
500mA | 15W **90224501**

more power supplies on page 474

OPTIONAL

PAR16 LED GU10 6W phase-cut dim
2700K 390lm **901228W2**

3000K 410lm **901228W4**

PAR16 LED GU10 7W ambient white dim
1800-3000K **901229S9**





SEEK

1.0 LED


LED 5/7W | 350-500mA | 13Vf
COB 3-step | excl. power supply

CE 0.52kg 960° IP20 0,3 P Λ 36°

84x100

35°/35° 120

25°/25° 10-25



2.0 LED


2xLED 5/7W | 350-500mA | 13Vf
COB 3-step | excl. power supply

CE 0.93kg 960° IP20 0,3 P Λ 36°

100x166

35°/35° 120

25°/25° 10-25



3.0 LED


3xLED 5/7W | 350-500mA | 13Vf
COB 3-step | excl. power supply

CE 1.35kg 960° IP20 0,3 P Λ 36°

100x248

35°/35° 120

25°/25° 10-25



3000K | >80CRI | 350-465lm



3000K | >80CRI | 2x350-465lm



3000K | >80CRI | 3x350-465lm



ALWAYS USE

power supply
350mA | 6W **90213202**

500mA | 10W **90214403**

more power supplies on page 474

ALWAYS USE

power supply
350mA | 6W **90213202**

500mA | 10W **90214403**

more power supplies on page 474

ALWAYS USE

power supply
350mA | 6W **90213202**

500mA | 10W **90214403**

more power supplies on page 474







SEEK



SEEK GAP

1.0 LED


LED 5/7W | 350-500mA | 13Vf
COB 3-step | excl. power supply

CE 0.46 kg \varnothing 960° IP20 \approx 0,3 \oplus Λ 36°

  98x98

 35°/35°  120

 25°/25°  10-25







2.0 LED


2xLED 5/7W | 350-500mA | 13Vf
COB 3-step | excl. power supply

CE 0.78 kg \varnothing 960° IP20 \approx 0,3 \oplus Λ 36°

  98x180

 35°/35°  120

 25°/25°  10-25



3.0 LED


3xLED 5/7W | 350-500mA | 13Vf
COB 3-step | excl. power supply

CE 1.17 kg \varnothing 960° IP20 \approx 0,3 \oplus Λ 36°

  98x262

 35°/35°  120

 25°/25°  10-25



3000K | >80CRI | 350-465lm

	128461W4
	128461E4
	128461B4

3000K | >80CRI | 2x350-465lm

	128561W4
	128561E4
	128561B4

3000K | >80CRI | 3x350-465lm

	128661W4
	128661E4
	128661B4

ALWAYS USE

plaster kit **90017107**

power supply
350mA | 6W **90213202**

500mA | 10W **90214403**

more power supplies on page 474

ALWAYS USE

plaster kit **90017108**

power supply
350mA | 6W **90213202**

500mA | 10W **90214403**

more power supplies on page 474

ALWAYS USE

plaster kit **90017109**

power supply
350mA | 6W **90213202**

500mA | 10W **90214403**

more power supplies on page 474





SEEK GAP





1.0 MR16


QR-CBC51 max. 50W | GU5.3
12V excl. transformer

CE 0.28kg TE 960° IP20 $\approx 0,9$

90

12°/12° 155

2-30



1.0 PAR16


PAR16 max. 50W | GU10
220-240VAC | 50-60Hz

CE 0.30kg TE 960° IP20 $\approx 0,9$

90

12°/12° 155

2-30



130210W0

130210S0



130220W0

130220S0

ALWAYS USE

transformer

12V | 60W **90221902**

12V | 105W **90221903**

OPTIONAL

PAR16 LED GU10 6W phase-cut dim

2700K 390lm **901228W2**

3000K 410lm **901228W4**

PAR16 LED GU10 7W ambient white dim

1800-3000K **901229S9**







PLUXO

1.0 LED

LED 8W | 220-240VAC | 50-60Hz
COB 2-step | incl. PS | phase-cut dim



CE 0.53kg \oplus 960° IP20 \approx 0,3 \oplus Λ 36°



1.0 PAR16

PAR16 max. 50W | GU10
220-240VAC | 50-60Hz



CE 0.41kg \oplus 960° IP20 \approx 0,9 \oplus



2.0 LED

2xLED 8W | 220-240VAC | 50-60Hz
COB 2-step | incl. PS | phase-cut dim



CE 1.06kg \oplus 960° IP20 \approx 0,3 \oplus Λ 36°



2.0 PAR16

2xPAR16 max. 50W | GU10
220-240VAC | 50-60Hz

CE 0.82kg \oplus 960° IP20 \approx 0,9 \oplus



2700K | >80CRI | 480lm

	142164W2
	142164S2
	142164B2

3000K | >80CRI | 480lm

	142164W4
	142164S4
	142164B4

	142120W0
	142120S0
	142120B0

OPTIONAL

PAR16 LED GU10 6W phase-cut dim 2700K 390lm	901228W2
3000K 410lm	901228W4

PAR16 LED GU10 7W ambient white dim 1800-3000K	901229S9
---	-----------------

2700K | >80CRI | 2x480lm

	142264W2
	142264S2
	142264B2

3000K | >80CRI | 2x480lm

	142264W4
	142264S4
	142264B4

	142220W0
	142220S0
	142220B0

OPTIONAL

PAR16 LED GU10 6W phase-cut dim 2700K 390lm	901228W2
3000K 410lm	901228W4

PAR16 LED GU10 7W ambient white dim 1800-3000K	901229S9
---	-----------------







3.0 LED

3xLED 8W | 220-240VAC | 50-60Hz
COB 2-step | incl. PS | phase-cut dim



CE 1.59 kg \oplus 960° IP20 \approx 0,3 \oplus Λ 36°



3.0 PAR16

3xPAR16 max. 50W | GU10
220-240VAC | 50-60Hz



CE 1.23 kg \oplus 960° IP20 \approx 0,9 \oplus



4.0 LED

4xLED 8W | 220-240VAC | 50-60Hz
COB 2-step | incl. PS | phase-cut dim



CE 2.12 kg \oplus 960° IP20 \approx 0,3 \oplus Λ 36°



4.0 PAR16

4xPAR16 max. 50W | GU10
220-240VAC | 50-60Hz

CE 1.64 kg \oplus 960° IP20 \approx 0,9 \oplus



2700K | >80CRI | 3x480lm

	142364W2
	142364S2
	142364B2

3000K | >80CRI | 3x480lm

	142364W4
	142364S4
	142364B4

	142320W0
	142320S0
	142320B0

OPTIONAL
PAR16 LED GU10 6W phase-cut dim

2700K 390lm	901228W2
3000K 410lm	901228W4

PAR16 LED GU10 7W ambient white dim

1800-3000K	901229S9
------------	-----------------

2700K | >80CRI | 4x480lm

	142464W2
	142464S2
	142464B2

3000K | >80CRI | 4x480lm

	142464W4
	142464S4
	142464B4

	142420W0
	142420S0
	142420B0

OPTIONAL
PAR16 LED GU10 6W phase-cut dim

2700K 390lm	901228W2
3000K 410lm	901228W4

PAR16 LED GU10 7W ambient white dim

1800-3000K	901229S9
------------	-----------------





PLUXO#2

1.0 PAR16

2xPAR16 max. 50W | GU10
220-240VAC | 50-60Hz


CE 0.82kg \oplus 960° IP20 \approx 0,9D



↻ 45°/45°



↻ 45°/45°



142520W0



142520S0



142520B0

OPTIONAL

PAR16 LED GU10 6W phase-cut dim

2700K 390lm **901228W2**

3000K 410lm **901228W4**

PAR16 LED GU10 7W ambient white dim
1800-3000K **901229S9**







PLUXO

1.0 LED111

LED 13W | 220-240V | 50-60Hz
AC-COB3-step | phase-cut dim



CE 0.93 kg \oplus 960° IP20 $\approx 0,3$ \oplus Λ 38°



2.0 LED111

2xLED 13W | 220-240V | 50-60Hz
AC-COB3-step | phase-cut dim



CE 1.86 kg \oplus 960° IP20 $\approx 0,3$ \oplus Λ 38°



3.0 LED111

3xLED 13W | 220-240V | 50-60Hz
AC-COB3-step | phase-cut dim



CE 2.79 kg \oplus 960° IP20 $\approx 0,3$ \oplus Λ 38°



4.0 LED111

4xLED 13W | 220-240V | 50-60Hz
AC-COB3-step | phase-cut dim

CE 3.72 kg \oplus 960° IP20 $\approx 0,3$ \oplus Λ 38°



2700K | >80CRI | 640lm



143168W2



143168S2



143168B2

2700K | >80CRI | 2x640lm



143268W2



143268S2



143268B2

2700K | >80CRI | 3x640lm



143368W2



143368S2



143368B2

2700K | >80CRI | 4x640lm



143468W2



143468S2



143468B2

3000K | >80CRI | 680lm



143168W4



143168S4



143168B4

3000K | >80CRI | 2x680lm



143268W4



143268S4



143268B4

3000K | >80CRI | 3x680lm



143368W4



143368S4



143368B4

3000K | >80CRI | 4x680lm



143468W4



143468S4



143468B4





PLUXO#2

1.0 LED111

2xLED 13W | 220-240V | 50-60Hz
AC-COB 3-step | phase-cut dim


CE 1.86 kg \oplus 960° IP20 \pm 0,3 \oplus \ominus Λ 38°



↻ 45°/45°



↻ 45°/45°



2700K | >80CRI | 2x640lm



143568W2



143568S2



143568B2

3000K | >80CRI | 2x680lm



143568W4



143568S4



143568B4





Et is niet meer van 't rok

SOLID

1.0 LED

LED 8W | 220-240VAC | 50-60Hz
COB2-step | incl. PS | phase-cut dim

CE 0.65kg \oplus 960° IP20 $\approx 0,3$ \odot Λ 36°

 25°/25°

 355°



1.0 PAR16

PAR16 max. 50W | GU10
220-240VAC | 50-60Hz

CE 0.61kg \oplus TE 960° IP20 $\approx 0,9$ \odot

 25°/25°

 355°



2700K | >80CRI | 480lm



133164W2



133164B2



133120W0



133120B0

3000K | >80CRI | 480lm



133164W4



133164B4

OPTIONAL

PAR16 LED GU10 6W phase-cut dim

2700K 390lm

901228W2

3000K 410lm

901228W4

PAR16 LED GU10 7W ambient white dim

1800-3000K

901229S9





SIRRA

1.0 LED

LED 10W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim

CE 0.86kg ⊕ 960° IP20 $\approx 0,3$ Ⓟ $\approx 36^\circ$

☐ ↻ 35°/35°

▲ ↻ 355°



1.0 PAR16

PAR16 max. 50W | GU10
220-240VAC | 50-60Hz

CE 0.74kg ⊕ 960° IP20 $\approx 0,9$ Ⓟ

☐ ↻ 35°/35°

▲ ↻ 355°



2700K | >90CRI | 590lm



134164W3



134120W0

3000K | >90CRI | 640lm



134164W5

OPTIONAL

PAR16 LED GU10 6W phase-cut dim



134164E5

2700K 390lm

901228W2



134164F5

3000K 410lm

901228W4

PAR16 LED GU10 7W ambient white dim

1800-3000K

901229S9



SIRRA








ROBY

1.6

LED 8W | 220-240VAC | 50-60Hz
PCB 3-step | incl. power supply


CE 1.00kg ⊕ 960° IP44 ⚡0,3 Ⓢ



2.6

LED 12W | 220-240VAC | 50-60Hz
PCB 3-step | incl. power supply


CE 1.55kg ⊕ 960° IP44 ⚡0,3 Ⓢ



3.5

LED 20W | 220-240VAC | 50-60Hz
PCB 3-step | incl. power supply

CE 2.45kg ⊕ 960° IP44 ⚡0,3 Ⓢ



3000K | >80CRI | 600lm



135183W4



135183L4

3000K | >80CRI | 1000lm



135283W4



135283L4

3000K | >80CRI | 1600lm



135383W4



135383L4








CIRRUS

6.7

⇒ 2xT16 14/24W | G5 | 220-240VAC
50-60Hz | EVG

CE 4.46 kg ⊕ 960° IP20 $\approx 0,3$ P




1381T7W0

9.7

⇒ 2xT16 21/39W | G5 | 220-240VAC
50-60Hz | EVG

CE 8.96 kg ⊕ 960° IP20 $\approx 0,3$ P



1382T7W0






1.3

LED 8W | 220-240VAC | 50-60Hz
PCB 3-step | incl. power supply

CE 0.47kg ⊕ 960° IP20 $\approx 0,3^{\circ}$



3000K | >85CRI | 783lm




136173W4

1.6

LED 9W | 220-240VAC | 50-60Hz
PCB 3-step | incl. power supply

CE 0.52kg ⊕ 960° IP20 $\approx 0,3^{\circ}$



3000K | >85CRI | 977lm




136273W4

1.9

LED 8W | 220-240VAC | 50-60Hz
PCB 3-step | incl. power supply

CE 0.63kg ⊕ 960° IP20 $\approx 0,3^{\circ}$



3000K | >85CRI | 783lm




136373W4

2.1

LED 12W | 220-240VAC | 50-60Hz
PCB 3-step | incl. power supply

CE 0.74kg ⊕ 960° IP20 $\approx 0,3^{\circ}$



3000K | >85CRI | 1284lm



136473W4






CORY

2.6

LED 16W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim

CE 0.99kg \oplus 960° IP20 \approx 0,3



3000K | >85CRI | 1820lm




136574W4

3.4

LED 20W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim

CE 1.46kg \oplus 960° IP20 \approx 0,3



3000K | >85CRI | 2371lm



136674W4



CORY







SIRRO


1.0 LED

LED 10W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim

CE 0.85kg \oplus 960° IP20 \approx 0,3 \oplus λ 36°

 25°/25°

 355°




1.0 PAR16

PAR16 max. 50W | GU10
220-240VAC | 50-60Hz

CE 0.81kg \oplus 960° IP20 \approx 0,9 \oplus

 25°/25°

 355°



2700K | >90CRI | 590lm



139164W3

3000K | >90CRI | 640lm



139164W5



139164E5



139164F5



139120W0

OPTIONAL

PAR16 LED GU10 6W phase-cut dim

2700K 390lm

901228W2

3000K 410lm

901228W4

PAR16 LED GU10 7W ambient white dim

1800-3000K

901229S9







SIRRO

2.0 LED

2xLED 10W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim

CE 1.57kg Ⓧ 960° IP20 Ⓡ0,3 Ⓢ Ⓜ 36°



2700K | >90CRI | 2x590lm



139264W3

3000K | >90CRI | 2x640lm



139264W5



139264E5





139264F5

2.0 PAR16

2xPAR16 max. 50W | GU10
220-240VAC | 50-60Hz

CE 1.51kg Ⓧ 960° IP20 Ⓡ0,9 Ⓢ Ⓜ



139220W0

OPTIONAL

PAR16 LED GU10 6W phase-cut dim

2700K 390lm

901228W2

3000K 410lm

901228W4

PAR16 LED GU10 7W ambient white dim



1800-3000K

901229S9

3.0 LED

3xLED 10W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim

CE 2.21kg Ⓧ 960° IP20 Ⓡ0,3 Ⓢ Ⓜ 36°



3000K | >90CRI | 3x640lm



139364E5



139364F5





Service




U80

1.0

⇒ T16 28/54W | G5
220-240VAC | 50-60Hz | EVG


CE 3.2kg ⊕ 960° IP20 $\approx 0,3$ P



2.0

⇒ T16 28/54W | G5
220-240VAC | 50-60Hz | EVG

CE 3.2kg ⊕ 960° IP20 $\approx 0,3$ P



no dim | opal cover



1411T3W0



1411T3A0

dali dim | opal cover



1411T4W0



1411T4A0

no dim | microprismatic cover



1411M3W0



1411M3A0

dali dim | microprismatic cover



1411M4W0



1411M4A0






CORO

1.1

LED 8W | 220-240VAC | 50-60Hz
PCB 3-step | incl. power supply

CE 0.37kg ⊕ 960° IP20 ⚡0,3⚡



3000K | >85CRI | 783lm




137173W4

1.3

LED 9W | 220-240VAC | 50-60Hz
PCB 3-step | incl. power supply

CE 0.43kg ⊕ 960° IP20 ⚡0,3⚡



3000K | >85CRI | 977lm




137273W4

1.4

LED 8W | 220-240VAC | 50-60Hz
PCB 3-step | incl. power supply

CE 0.62kg ⊕ 960° IP20 ⚡0,3⚡



3000K | >85CRI | 783lm




137373W4

1.6

LED 9W | 220-240VAC | 50-60Hz
PCB 3-step | incl. power supply

CE 0.76kg ⊕ 960° IP20 ⚡0,3⚡



3000K | >85CRI | 977lm



137473W4






CORO

2.0

LED 16W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim

CE 1.59 kg \oplus 960° IP20 \approx 0,3



3000K | >85CRI | 1820lm




137674W4

2.5

LED 20W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim

CE 1.79 kg \oplus 960° IP20 \approx 0,3



3000K | >85CRI | 2371lm



137774W4






1.0 LED

LED 8W | 220-240VAC | 50-60Hz
COB 2-step | incl. PS | phase-cut dim


CE 0.67kg TE 960° IP20 λ 0,3 λ 36°



1.0 PAR16

PAR16 max. 50W | GU10
220-240VAC | 50-60Hz

CE 0.66kg TE 960° IP20 λ 0,9 λ 36°



2200K | >80CRI | 315lm



146164G1



146164Q1



146164B1

2700K | >80CRI | 480lm



146164W2



146164L2



146164G2



146164Q2



146164B2

3000K | >80CRI | 480lm



146164W4



146164L4



146164G4



146164Q4



146164B4



146120W0



146120L0



146120G0



146120Q0



146120B0

OPTIONAL

PAR16 LED GU10 6W phase-cut dim

2700K 390lm

901228W2

3000K 410lm

901228W4

PAR16 LED GU10 7W ambient white dim

1800-3000K

901229S9



OPTIONAL

inner cover



911011W1



911011G1



911011B1






2.0 LED

2xLED 8W | 220-240VAC | 50-60Hz
COB 2-step | incl. PS | phase-cut dim


CE 1.17kg Ⓧ 960° IP20 ⚡0,3 Ⓟ ⚡36°



2.0 PAR16

2xPAR16 max. 50W | GU10
220-240VAC | 50-60Hz

CE 1.13kg Ⓧ 960° IP20 ⚡0,9 Ⓟ



2200K | >80CRI | 2x315lm



146264G1



146264B1

2700K | >80CRI | 2x480lm



146264W2



146264L2



146264G2



146264Q2



146264B2

3000K | >80CRI | 2x480lm



146264W4



146264L4



146264G4



146264Q4



146264B4

OPTIONAL

PAR16 LED GU10 6W phase-cut dim

2700K 390lm **901228W2**

3000K 410lm **901228W4**

PAR16 LED GU10 7W ambient white dim

1800-3000K **901229S9**



OPTIONAL

inner cover



911011W1



911011G1



911011B1






DOCUS

1.0 LED

LED 8W | 220-240VAC | 50-60Hz
COB 2-step | incl. PS | phase-cut dim


CE 0.57kg ⊕ 960° IP20 $\approx 0,3$ Ⓟ A 36°



1.0 PAR16

PAR16 max. 50W | GU10
220-240VAC | 50-60Hz

CE 0.55kg ⊕ 960° IP20 $\approx 0,9$ Ⓟ



2200K | >80CRI | 315lm



146364G1



146364B1

2700K | >80CRI | 480lm



146364W2



146364L2



146364G2



146364B2

3000K | >80CRI | 480lm



146364W4



146364L4



146364G4



146364B4



146320W0



146320L0



146320G0



146320B0

OPTIONAL

PAR16 LED GU10 6W phase-cut dim

2700K 390lm

901228W2

3000K 410lm

901228W4

PAR16 LED GU10 7W ambient white dim

1800-3000K

901229S9



OPTIONAL

inner cover



911021W1



911021G1



911021B1





DOCUS

BEACH RESORT HOTEL | SAI KUNG | HONG KONG






DOCUS

2.0 LED

2xLED8W | 220-240VAC | 50-60Hz
COB 2-step | incl. PS | phase-cut dim


CE 1.06 kg \oplus 960° IP20 \approx 0,3 \oplus A 36°



2.0 PAR16

2xPAR16 max. 50W | GU10
220-240VAC | 50-60Hz

CE 1.01 kg \oplus 960° IP20 \approx 0,9 \oplus



2200K | >80CRI | 2x315lm



146464G1



146464B1

2700K | >80CRI | 2x480lm



146464W2



146464L2



146464G2



146464B2

3000K | >80CRI | 2x480lm



146464W4



146464L4



146464G4



146464B4



146420W0



146420L0



146420G0



146420B0

OPTIONAL

PAR16 LED GU10 6W phase-cut dim

2700K 390lm

901228W2


3000K 410lm

901228W4

PAR16 LED GU10 7W ambient white dim

1800-3000K

901229S9



OPTIONAL

inner cover



911021W1



911021G1



911021B1






HEXO

1.0 LED

LED 8W | 220-240VAC | 50-60Hz
COB2-step | incl. PS | phase-cut dim


CE 0.65kg \oplus 960° IP20 \approx 0,3 \oplus \approx 36°



1.0 PAR16

PAR16 max. 50W | GU10
220-240VAC | 50-60Hz

CE 0.63kg \oplus 960° IP20 \approx 0,9 \oplus



2200K | >80CRI | 315lm



146564G1



146564Q1



146564B1

2700K | >80CRI | 480lm



146564W2



146564G2



146564Q2



146564B2

3000K | >80CRI | 480lm



146564W4



146564G4



146564Q4



146564B4



146520W0



146520G0



146520Q0



146520B0

OPTIONAL

PAR16 LED GU10 6W phase-cut dim

2700K 390lm

901228W2

3000K 410lm

901228W4

PAR16 LED GU10 7W ambient white dim

1800-3000K

901229S9



OPTIONAL

inner cover



911031W1



911031G1



911031B1






HEXO

2.0 LED

2xLED 8W | 220-240VAC | 50-60Hz
COB 2-step | incl. PS | phase-cut dim


CE 1.23kg \oplus 960° IP20 \approx 0,3 \oplus Λ 36°



2.0 PAR16

2xPAR16 max. 50W | GU10
220-240VAC | 50-60Hz

CE 1.19kg \oplus 960° IP20 \approx 0,9 \oplus



2200K | >80CRI | 2x315lm



146664G1



146664Q1



146664B1

2700K | >80CRI | 2x480lm



146664W2



146664G2



146664Q2



146664B2

3000K | >80CRI | 2x480lm



146664W4



146664G4



146664Q4



146664B4



146620W0



146620G0



146620Q0



146620B0

OPTIONAL

PAR16 LED GU10 6W phase-cut dim

2700K 390lm

901228W2


3000K 410lm

901228W4

PAR16 LED GU10 7W ambient white dim

1800-3000K

901229S9



OPTIONAL

inner cover



911031W1



911031G1



911031B1





HEXO






1.0 LED

LED 8W | 220-240VAC | 50-60Hz
COB2-step | incl. PS | phase-cut dim


CE 0.63kg \oplus 960° IP20 \approx 0,3 \oplus \approx 36°



1.0 PAR16

PAR16 max. 50W | GU10
220-240VAC | 50-60Hz

CE 0.61kg \oplus 960° IP20 \approx 0,9 \oplus



2200K | >80CRI | 315lm



146764G1



146764Q1



146764B1

2700K | >80CRI | 480lm



146764W2



146764L2



146764G2



146764Q2



146764B2

3000K | >80CRI | 480lm



146764W4



146764L4



146764G4



146764Q4



146764B4



OPTIONAL

inner cover



911041W1



911041G1



911041B1



146720W0



146720L0



146720G0



146720Q0



146720B0

OPTIONAL

PAR16 LED GU10 6W phase-cut dim

2700K 390lm

901228W2

3000K 410lm

901228W4

PAR16 LED GU10 7W ambient white dim

1800-3000K

901229S9






BEBOW

1.0

LED 35W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim
opal cover

CE 6.3kg \oplus TE 960° IP20 ≈ 0.3



3000K | >80CRI | 2450lm



132184W4




132184B4

2.0

LED 55W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim
opal cover + 3xspot | two circuits

CE 6.7kg \oplus TE 960° IP20 ≈ 0.3



3000K | >80CRI | 3700lm



132164W4



132164B4






BEBOW

3.0

LED 35W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim
opal cover

CE 8kg \oplus TE 960° IP20 ≈ 0.3




3000K | >80CRI | 2750lm

	132284W4
	132284B4

4.0

LED 48W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim
opal cover + 2x spot | two circuits

CE 8.3kg \oplus TE 960° IP20 ≈ 0.3



3000K | >80CRI | 3290lm

	132264W4
	132264B4






03

3xQA60 max. 53W | E27
220-240VAC | 50-60Hz

CE 4.0kg ⊕ 960° IP20 $\approx 0,9$



2051E8S0



2051E8G0

OPTIONAL

QA60 LED E27 6W

2200K 400lm

9003E109

2700K 650lm

9003E108






ELLO SYSTEM

1.0

LED 18W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim

CE 1.7kg \oplus 960° IP20 ≈ 0.3 \oplus



3000K | >80CRI | 940lm



500184W4



500184B4

ALWAYS USE

connector point



900190W1



900190B1

OPTIONAL

suspension

set 2.0m

90015102

powerfeeder
for suspension

90018001






ROB

1.6

LED 8W | 220-240VAC | 50-60Hz
PCB 3-step | incl. power supply

CE 0.8 kg | 960° | IP44 | $\approx 0,3$ | P



3000K | >80CRI | 600lm



701183W4




701183S4

2.6

LED 12W | 220-240VAC | 50-60Hz
PCB 3-step | incl. power supply

CE 1.30 kg | 960° | IP44 | $\approx 0,3$ | P



3000K | >80CRI | 1000lm



701283W4




701283S4

3.5

LED 20W | 220-240VAC | 50-60Hz
PCB 3-step | incl. power supply

CE 2.00 kg | 960° | IP44 | $\approx 0,3$ | P



3000K | >80CRI | 1600lm



701383W4



701383S4





SQUBE on base

1.0 LED

LED 6W | 220-240VAC | 50-60Hz
COB2-step | incl. power supply

CE 0.41kg ⊕ 960° IP20 ⚡0,3⚡ Ⓟ ⚡36°

☐ ↻ 90°

▀ ↻ 355°



1.0 PAR16

PAR16 max. 50W | GU10
220-240VAC | 50-60Hz

CE 0.41kg ⊕ 960° IP20 ⚡0,9⚡

☐ ↻ 90°

▀ ↻ 355°



2200K | >80CRI | 315lm



144263B1

2700K | >80CRI | 480lm



144263W2



144263B2



144220W0



144220B0

OPTIONAL

PAR16 LED GU10 6W phase-cut dim

2700K 390lm

901228W2

3000K 410lm

901228W4

PAR16 LED GU10 7W ambient white dim

1800-3000K

901229S9







SQUBE



SQUBE on track


1.0 LED

LED 6W | 220-240VAC | 50-60Hz
COB2-step | incl. power supply

CE 0.29kg \oplus 960° IP20 \approx 0,3 \oplus Λ 36°

 \curvearrowright 90°


 \curvearrowright 355°




1.0 PAR16

PAR16 max. 50W | GU10
220-240VAC | 50-60Hz

CE 0.32kg \oplus 960° IP20 \approx 0,9 \oplus Λ 36°

 \curvearrowright 90°

 \curvearrowright 355°



2200K | >80CRI | 320lm



144163B1

2700K | >80CRI | 480lm



144163W2

144163B2

more 1-phase track accessories on page 482



144120W0



144120B0

OPTIONAL

PAR16 LED GU10 6W phase-cut dim

2700K 390lm

901228W2

3000K 410lm

901228W4

PAR16 LED GU10 7W ambient white dim

1800-3000K

901229S9

more 1-phase track accessories on page 482







1.0 LED111

LED 13W | 220-240V | 50-60Hz
AC-COB3-step | phase-cut dim

CE 1.70 kg \oplus 960° IP20 \approx 0,3 \oplus Λ 38°



2700K | >80CRI | 640lm



116168W2



116168S2

3000K | >80CRI | 680lm



116168W4





116168S4

2.0 LED111

2xLED 13W | 220-240V | 50-60Hz
AC-COB3-step | phase-cut dim

CE 2.80 kg \oplus 960° IP20 \approx 0,3 \oplus Λ 38°



2700K | >80CRI | 2x640lm



116268W2



116268S2

3000K | >80CRI | 2x680lm



116268W4





116268S4

3.0 LED111

3xLED 13W | 220-240V | 50-60Hz
AC-COB3-step | phase-cut dim

CE 4.20 kg \oplus 960° IP20 \approx 0,3 \oplus Λ 38°



2700K | >80CRI | 3x640lm



116368W2



116368S2

3000K | >80CRI | 3x680lm



116368W4



116368S4





PLUXO on track


1.0 PAR16

PAR16 max. 50W | GU10
220-240V | 50-60Hz

CE 0.41kg \oplus 960° IP20 \approx 0,9

 45°/45°

 45°/45°




1.0 LED111

LED 13W | 220-240V | 50-60Hz
AC-COB 3-step | phase-cut dim

CE 0.93kg \oplus 960° IP20 \approx 0,3 \oplus A 38°

 45°/45°

 45°/45°



2700K | >80CRI | 640lm

 **142620W0**

 **143668W2**

 **142620B0**

 **143668B2**


3000K | >80CRI | 680lm

OPTIONAL

PAR16 LED GU10 6W phase-cut dim

2700K 390lm **901228W2**

 **143668W4**

 **143668B4**

3000K 410lm **901228W4**

more 1-phase track accessories on page 482

PAR16 LED GU10 7W ambient white dim

1800-3000K **901229S9**

more 1-phase track accessories on page 482






CONE

1.0

LED 8W | 220-240V | 50-60Hz
COB 3-step | incl. PS | phase-cut dim

CE 0.55kg \oplus 960° IP20 \approx 0,3 \odot A 36°



2700K | >80CRI | 480lm



200184W2



200184C2



200184B2







CONE





SIRRA

1.0 LED

LED 10W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim

CE 0.86 kg \oplus 960° IP20 $\approx 0,3$ \odot \wedge 36°



2700K | >90CRI | 590lm



134264W3



134264E3

3000K | >90CRI | 640lm



134264W5



134264E5





134264F5

1.0 PAR16

PAR16 max. 50W | GU10
220-240VAC | 50-60Hz

CE 0.74 kg \oplus 960° IP20 $\approx 0,9$



134220W0



134220E0

OPTIONAL

PAR16 LED GU10 6W phase-cut dim

2700K 390lm

901228W2

3000K 410lm

901228W4

PAR16 LED GU10 7W ambient white dim

1800-3000K

901229S9





SIRRA






LYNER

2.5 | 4.5

LED 8W | 220-240VAC | 50-60Hz
COB 3-step | incl. power supply

CE 1.34kg \oplus 960° IP20 \approx 0,3 \oplus Λ 36°



2.5

3000K | >80CRI | 480lm | 200mm



201163W4



201163L4

4.5

3000K | >80CRI | 480lm | 400mm



201263W4




201263L4

3.8 | 5.8

LED 10W | 220-240VAC | 50-60Hz
COB 3-step | incl. power supply

CE 2kg \oplus 960° IP20 \approx 0,3 \oplus Λ 36°



3.8

3000K | >80CRI | 640lm | 300mm



201363W4



201363L4

5.8

3000K | >80CRI | 640lm | 500mm



201463W4



201463L4






CONCRETE TUBE

2.0 | 4.0

LED 8W | 220-240VAC | 50-60Hz
COB3-step | incl. power supply

CE 1.45/1.89kg | 960° | IP20 | 0,3 | P



2.0
3000K | >80CRI | 480lm | 200mm



202163W4



202163T4

4.0
3000K | >80CRI | 480lm | 400mm



202263W4




202263T4

4.5

LED 13W | 220-240V | 50-60Hz
AC-COB3-step | incl. power supply

CE 3.5kg | 960° | IP20 | 0,3 | P



3000K | >80CRI | 680lm



202363W4



202363T4






ROMANCE



3.6

QT12 max. 100W | GY6.35
220-240VAC | 50-60Hz | incl. TE

CE 2.9kg ⊕ 960° IP20 ⚡0,9Ⓢ



2031Q8W0






ROBY

2.6

LED 12W | 220-240VAC | 50-60Hz
PCB 3-step | incl. power supply

CE 1.95kg | 960° | IP20 | 0,3 | P




3000K | >80CRI | 1000lm

	135783W4
	135783L4

3.5

LED 20W | 220-240VAC | 50-60Hz
PCB 3-step | incl. power supply

CE 2.85kg | 960° | IP20 | 0,3 | P



3000K | >80CRI | 1600lm

	135883W4
	135883L4





PLUXO CLUST


2.0 LED111

2xLED 13W | 220-240V | 50-60Hz
AC-COB3-step | phase-cut dim

CE 1.86 kg \oplus 960° IP20 \approx 0,3 \oplus Λ 38°

\updownarrow 45°/45°

\curvearrowright 45°/45°



2700K | >80CRI | 2x640lm

 **143864W2**

 **143864S2**

3000K | >80CRI | 2x680lm

 **143864W4**

 **143864S2**


4.0 LED111

4xLED 13W | 220-240V | 50-60Hz
AC-COB3-step | phase-cut dim

CE 2.75 kg \oplus 960° IP20 \approx 0,3 \oplus Λ 38°


\updownarrow 45°/45°

\curvearrowright 45°/45°




2700K | >80CRI | 4x640lm

 **143764W2**

 **143764S2**

3000K | >80CRI | 4x680lm

 **143764W4**

 **143764S4**





PLUXO






NOA

2.6

LED 6W | 220-240V | 50-60Hz
PCB 3-step | incl. power supply

CE 1.2kg ⊕ 960° IP20 $\approx 0,3$ P



2700K | >80CRI | 350lm



204183W2




204183B2

3.5

LED 8W | 220-240V | 50-60Hz
PCB 3-step | incl. power supply

CE 1.8kg ⊕ 960° IP20 $\approx 0,3$ P



2700K | >80CRI | 450lm



204283W2




204283B2

4.5

LED 10W | 220-240V | 50-60Hz
PCB 3-step | incl. power supply

CE 2.5kg ⊕ 960° IP20 $\approx 0,3$ P



2700K | >80CRI | 550lm



204383W2



204383B2








J.J.W.

04

6xQA60 max. 53W | E27
220-240VAC | 50-60Hz

CE 4.5kg ⊕ 960° IP20 (0,9)



 **2052E8S0**

 **2052E8G0**

OPTIONAL

QA60 LED E27 6W
2200K 400lm

9003E109

2700K 650lm

9003E108







J.J.W.






J.J.W.

05

3xQA60 max. 53W | E27
220-240VAC | 50-60Hz

CE 8.5kg ⊕ 960° IP20 ⚡0,9



2053E880



2053E8G0

OPTIONAL

QA60 LED E27 6W
2200K 400lm

9003E109

2700K 650lm

9003E108






CORY

6.6

LED 14W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim

CE 5.75 kg ⊕ 960° IP20 ⚡0,3



3000K | >85CRI | 1535lm




206174W4

9.6

LED 20W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim

CE 12.5 kg ⊕ 960° IP20 ⚡0,3



3000K | >85CRI | 2731lm




206274W4

12.0

LED 30W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim

CE 20.75 kg ⊕ 960° IP20 ⚡0,3



3000K | >85CRI | 2870lm



206374W4






CIRRUS

6.7

⇒ 2xT16 14/24W | G5 | 220-240VAC
50-60Hz | EVG

CE 4.46kg ⊕ 960° IP20 $\approx 0,3$ P




1381T7W0

9.7

⇒ 2xT16 21/39W | G5 | 220-240VAC
50-60Hz | EVG

CE 8.96kg ⊕ 960° IP20 $\approx 0,3$ P



1382T7W0

ALWAYS USE

suspension
set 1.25m

90015111

suspension
set 4.0m

90015112

ALWAYS USE

suspension
set 1.25m

90015111

suspension
set 4.0m

90015112



CIRRUS








2.0 | 3.0 LED

LED 8W | 220-240VAC | 50-60Hz
COB 2-step | incl. PS | phase-cut dim

CE 0.53kg \oplus 960° IP20 \approx 0,3 \oplus Λ 36°



2.0
2200K | >80CRI | 380lm | 200mm



207164B1

2700K | >80CRI | 480lm | 200mm



207164W2



207164L2



207164B2

3.0
2200K | >80CRI | 380lm | 300mm



207264B1

2700K | >80CRI | 480lm | 300mm



207264W2



207264L2




207264B2

2.0 | 3.0 PAR16

PAR16 max. 50W | GU10
220-240VAC | 50-60Hz

CE 0.51kg \oplus 960° IP20 \approx 0,9 \oplus



2.0
200mm



207120W0



207120L0



207120B0

3.0
300mm



207220W0



207220L0



207220B0

OPTIONAL

PAR16 LED GU10 6W phase-cut dim

2700K 390lm

901228W2

3000K 410lm

901228W4

PAR16 LED GU10 7W ambient white dim

1800-3000K

901229S9






HEXO

2.0 | 3.0 LED

LED 8W | 220-240VAC | 50-60Hz
COB 2-step | incl. PS | phase-cut dim

CE 0.45kg \oplus 960° IP20 $\approx 0,3$ \odot $\wedge 36^\circ$



2.0
2200K | >80CRI | 380lm | 200mm

	207364G1
	207364Q1
	207364B1

2700K | >80CRI | 480lm | 200mm

	207364G2
	207364Q2
	207364B2

3.0
2200K | >80CRI | 380lm | 300mm

	207464G1
	207464Q1
	207464B1


2700K | >80CRI | 480lm | 300mm

	207464G2
	207464Q2
	207464B2

2.0 | 3.0 PAR16

PAR16 max. 50W | GU10
220-240VAC | 50-60Hz

CE 0.43kg \oplus 960° IP20 $\approx 0,9$



2.0
200mm

	207320G0
	207320Q0
	207320B0

3.0
300mm

	207420G0
	207420Q0
	207420B0

OPTIONAL
PAR16 LED GU10 6W phase-cut dim

2700K 390lm	901228W2
3000K 410lm	901228W4

PAR16 LED GU10 7W ambient white dim

1800-3000K	901229S9
------------	-----------------






DOCUS

2.0 | 3.0 LED

LED 8W | 220-240VAC | 50-60Hz
COB2-step | incl. PS | phase-cut dim

CE 0.51kg ⊕ 960° IP20 ⚡0,3 Ⓟ ⚡36°



2.0
2200K | >80CRI | 380lm | 200mm



207564B1

2700K | >80CRI | 480lm | 200mm



207564W2



207564L2



207564G2



207564B2

3.0
2200K | >80CRI | 380lm | 300mm



207664B1

2700K | >80CRI | 480lm | 300mm



207664W2



207664L2



207664G2




207664B2

2.0 | 3.0 PAR16

PAR16 max. 50W | GU10
220-240VAC | 50-60Hz

CE 0.49kg ⊕ 960° IP20 ⚡0,9 Ⓟ



2.0
200mm



207520W0



207520L0



207520G0



207520B0

3.0
300mm



207620W0



207620L0



207620G0



207620B0

OPTIONAL

PAR16 LED GU10 6W phase-cut dim

2700K 390lm

901228W2

3000K 410lm

901228W4

PAR16 LED GU10 7W ambient white dim

1800-3000K

901229S9






2.0 | 3.0 LED

LED 8W | 220-240VAC | 50-60Hz
COB 2-step | incl. PS | phase-cut dim

CE 0.41kg \oplus 960° IP20 $\approx 0,3$ \oplus $\Lambda 36^\circ$



2.0
2200K | >80CRI | 380lm | 200mm



207764B1

2700K | >80CRI | 480lm | 200mm



207764W2



207764L2



207764B2

3.0
2200K | >80CRI | 380lm | 300mm



207864B1

2700K | >80CRI | 480lm | 300mm



207864W2



207864L2




207864B2

2.0 | 3.0 PAR16

PAR16 max. 50W | GU10
220-240VAC | 50-60Hz

CE 0.39kg \oplus 960° IP20 $\approx 0,9$



2.0
200mm



207720W0

2700K | >80CRI | 390lm



207720L0



207720B0

3.0
300mm



207820W0

2700K | >80CRI | 390lm



207820L0



207820B0

OPTIONAL

PAR16 LED GU10 6W phase-cut dim
2700K 390lm **901228W2**

3000K 410lm **901228W4**

PAR16 LED GU10 7W ambient white dim
1800-3000K **901229S9**







SIRRO

1.0 LED

LED 10W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim

CE 0.85kg \oplus 960° IP20 $\approx 0,3$ \oplus Λ 36°



2700K | >90CRI | 590lm



139564W3

3000K | >90CRI | 640lm



139564W5



139564E5





139564F5

1.0 PAR16

PAR16 max. 50W | GU10
220-240VAC | 50-60Hz

CE 0.80kg \oplus 960° IP20 $\approx 0,9$



139520W0

OPTIONAL

PAR16 LED GU10 6W phase-cut dim

2700K 390lm **901228W2**

3000K 410lm **901228W4**

PAR16 LED GU10 7W ambient white dim

1800-3000K **901229S9**







SIRRO

2.0 LED

2xLED 10W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim

CE 1.60 kg \ominus 960° IP20 \approx 0,3 \oplus Λ 36°



2700K | >90CRI | 2x590lm





3000K | >90CRI | 2x640lm



2.0 PAR16

2xPAR16 max. 50W | GU10
220-240VAC | 50-60Hz

CE 1.52 kg \ominus 960° IP20 \approx 0,9 \oplus



2700K | >90CRI | 3x590lm



OPTIONAL

PAR16 LED GU10 6W phase-cut dim

2700K 390lm **901228W2**

3000K 410lm **901228W4**



PAR16 LED GU10 7W ambient white dim

1800-3000K **901229S9**

3.0 LED

3xLED 10W | 220-240VAC | 50-60Hz
COB 3-step | incl. PS | phase-cut dim


CE 2.30 kg \ominus 960° IP20 \approx 0,3 \oplus Λ 36°



2700K | >90CRI | 3x590lm



3000K | >90CRI | 3x640lm






BEBOW

1.0

LED 35W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim
opal cover

CE 6.3kg \oplus TE 960° IP20 $\approx 0,9$



3000K | >80CRI | 2450lm



132384W4




132384B4

2.0

LED 55W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim
opal cover + 3xspot | two circuits

CE 6.7kg \oplus TE 960° IP20 $\approx 0,9$



3000K | >80CRI | 3700lm



132364W4



132364B4






BEBOW

3.0

LED 35W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim
opal cover

CE 8kg ± TE 960° IP20 ± 0.9



3000K | >80CRI | 2570lm



132484W4




132484B4

4.0

LED 48W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim
opal cover + 2x spot | two circuits

CE 8.3kg ± TE 960° IP20 ± 0.9



3000K | >80CRI | 3290lm



132464W4



132464B4






U80

1.0

⇒ T16 28/54W | G5
220-240VAC | 50-60Hz | EVG

CE 3.2kg ⊕ 960° IP20 $\approx 0,3$ P



no dim | opal cover



1412T3W0



1412T3A0

dali dim | opal cover



1412T4W0




1412T4A0

2.0

⇒ T16 28/54W | G5
220-240VAC | 50-60Hz | EVG

CE 3.4kg ⊕ 960° IP20 $\approx 0,3$ P



no dim | microprismatic cover



1412M3W0



1412M3A0

dali dim | microprismatic cover



1412M4W0



1412M4A0






BISHOP

4.0

QA60 max. 53W | E27
220-240VAC | 50-60Hz

CE 1.08 kg ⊕ 960° IP20 $\approx 0,9$




2181E0D0

6.0

QA60 max. 53W | E27
220-240VAC | 50-60Hz

CE 2.62 kg ⊕ 960° IP20 $\approx 0,9$




2182E0D0

8.0

QA60 max. 53W | E27
220-240VAC | 50-60Hz

CE 5.70 kg ⊕ 960° IP20 $\approx 0,9$



2183E0D0

OPTIONAL

QA60 LED E27 6W
2200K 400lm

9003E109

2700K 650lm

9003E108

OPTIONAL

QA60 LED E27 6W
2200K 400lm

9003E109

2700K 650lm

9003E108

OPTIONAL

QA60 LED E27 6W
2200K 400lm


9003E109

2700K 650lm

9003E108





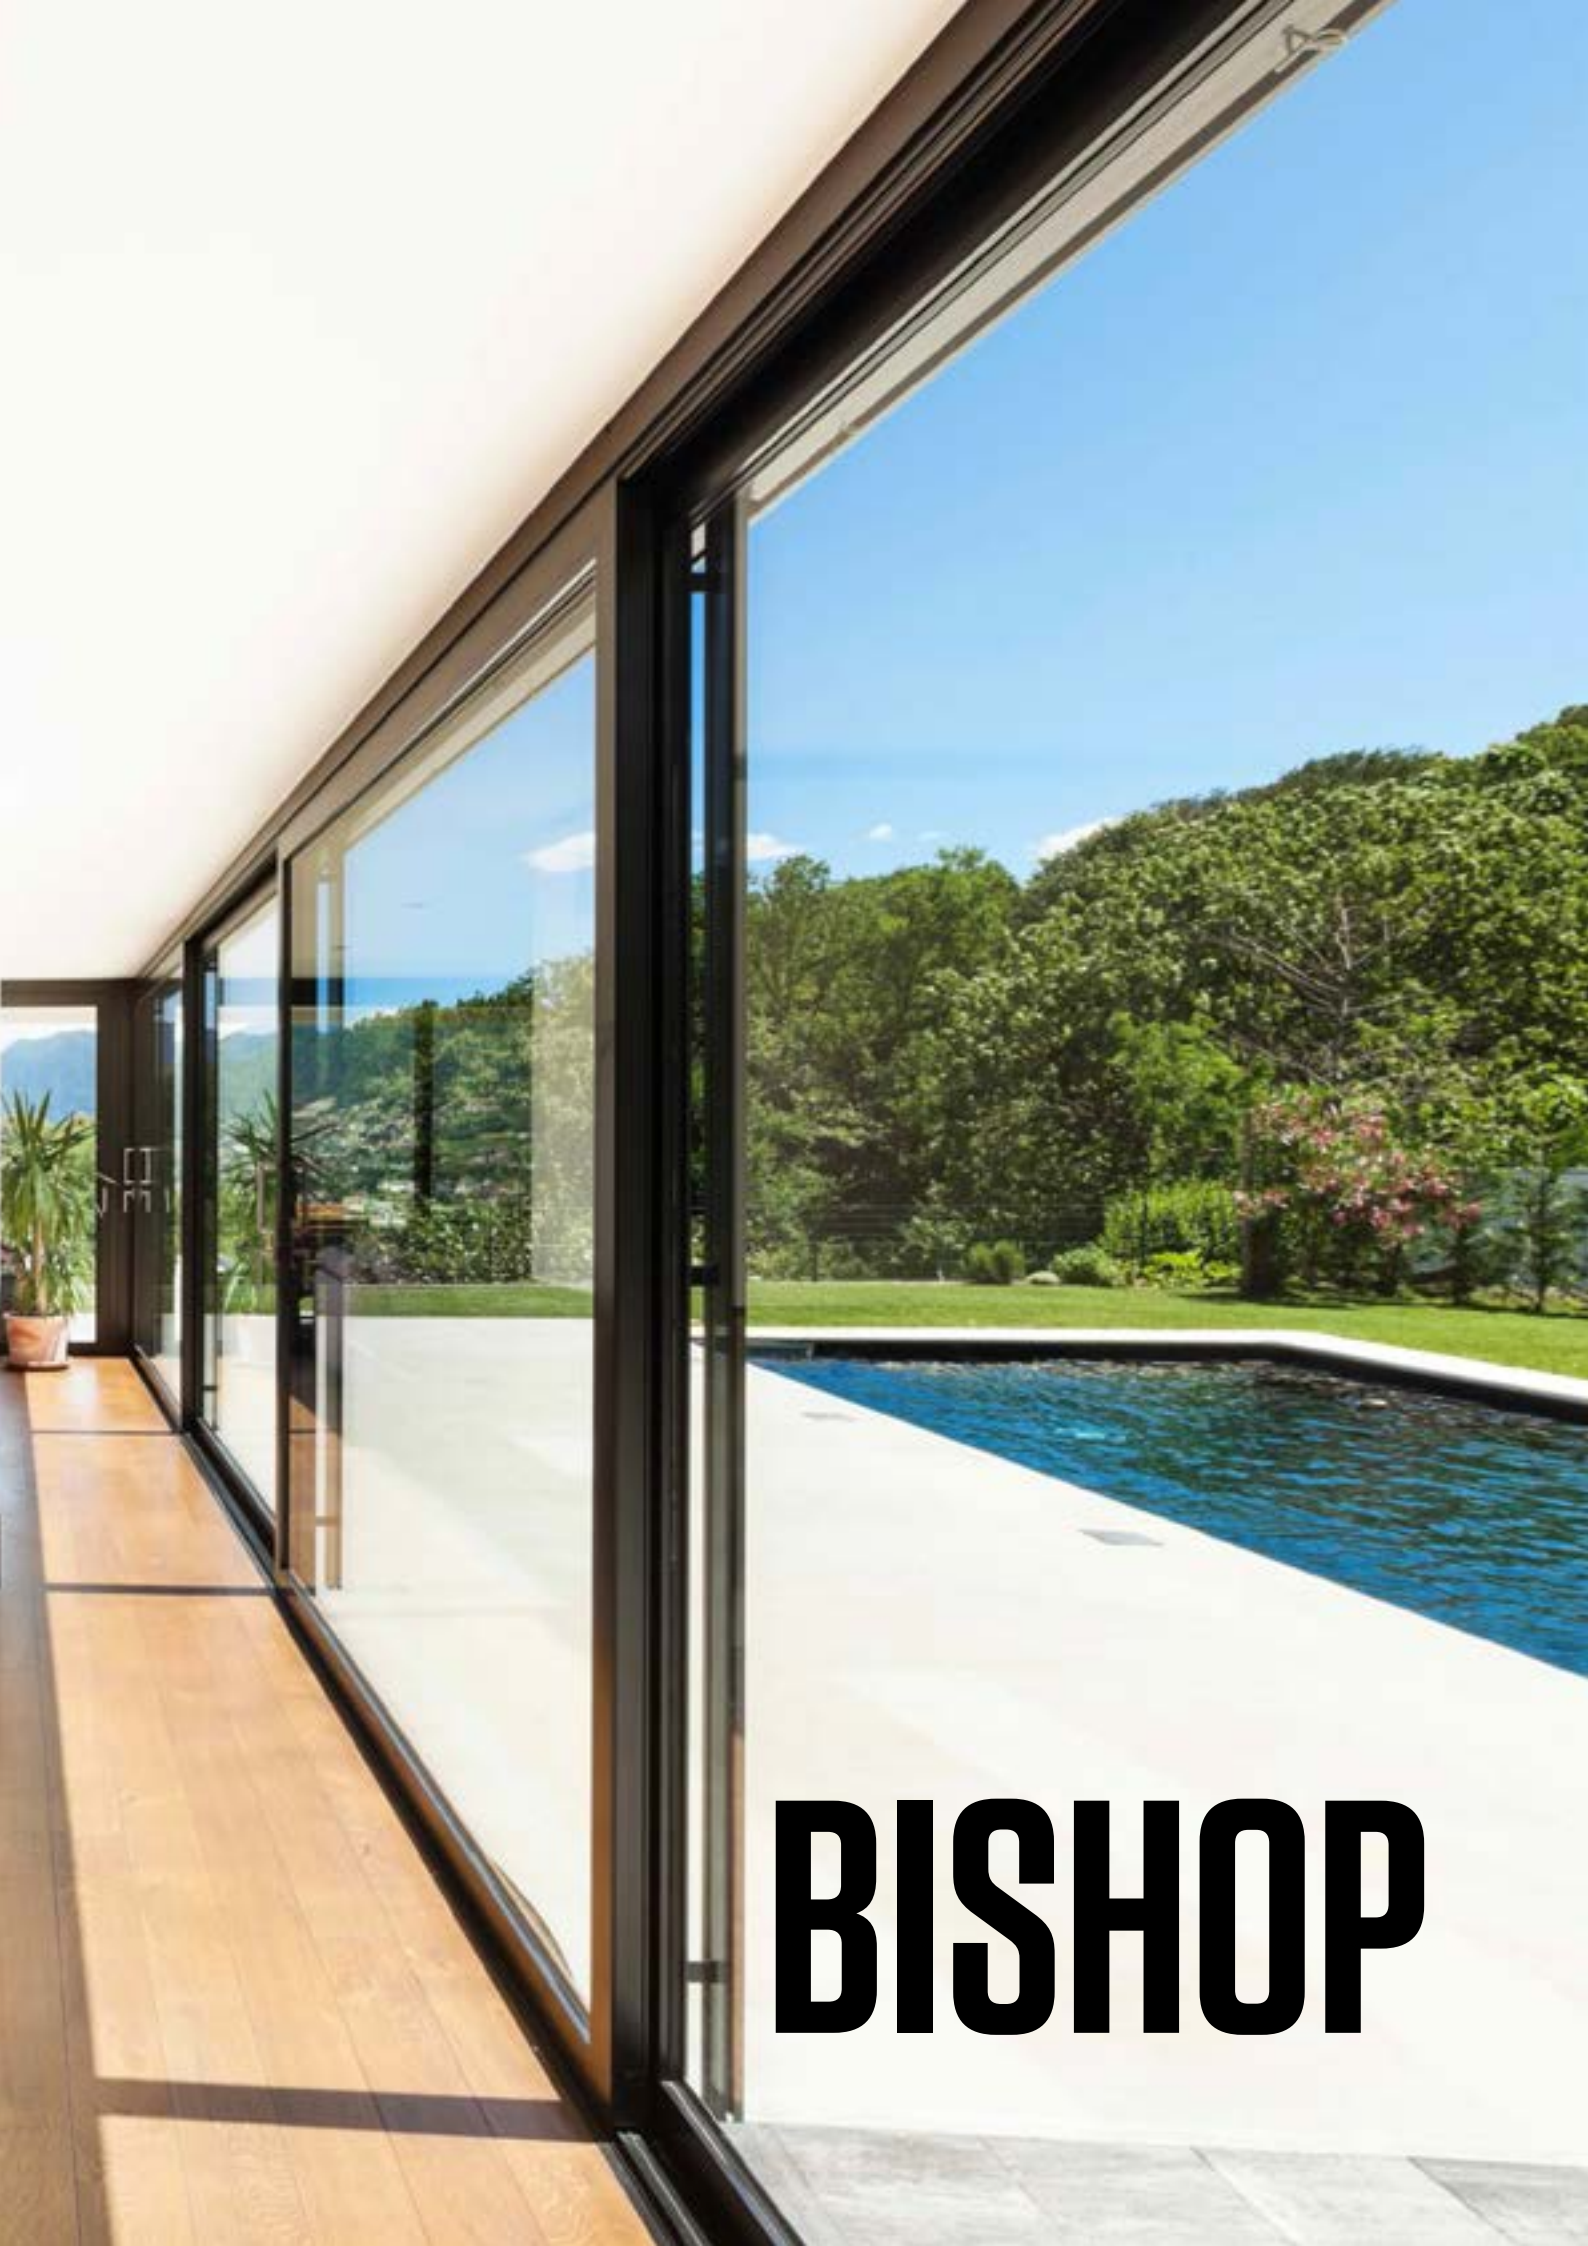

BISHOP




CORK

1.0

LED 3W | 220-240V | 50-60Hz
PCB 3-step | incl. power supply

CE 0.55kg \oplus 960° IP20 \approx 0,3 \odot A 36°



2200K | >80CRI | 120lm



210163W1



210163B1

2700K | >80CRI | 180lm



210163W2



210163B2

OPTIONAL

bottle 1

75/174

90019013

bottle 2

87/323

90019014








WIRO



2.0

QA60 max. 60W | E27
220-240VAC | 50-60Hz

CE 0.53kg \oplus 960° IP20 \approx 0,9



2096E0V0



2096E0B0

OPTIONAL

QA60 LED E27 6W
2200K 400lm

9003E109

2700K 650lm

9003E108

T45-S CARBON FILAMENT E27 15W
2200K 50lm

9003E104

QA60 CARBON FILAMENT E27 15W
2200K 50lm

9003E101

more optional lamps and technical details
on page 476




WIRO

1.8

QA60 max. 60W | E27
220-240VAC | 50-60Hz

CE 1.24 kg ⊕ 960° IP20 $\approx 0,9$



2092E0V0



2092E0B0

OPTIONAL

QA60 LED E27 6W
2200K 400lm

9003E109

2700K 650lm

9003E108

T32-180 CARBON FILAMENT E27 15W
2200K 50lm

9003E106

QA60 CARBON FILAMENT E27 15W
2200K 50lm


9003E101

more optional lamps and technical details
on page 476

3.8

QA60 max. 60W | E27
220-240VAC | 50-60Hz

CE 2.4 kg ⊕ 960° IP20 $\approx 0,9$



2093E0V0



2093E0B0

OPTIONAL

QA60 LED E27 6W
2200K 400lm

9003E109

2700K 650lm

9003E108

T32-180 CARBON FILAMENT E27 15W
2200K 50lm

9003E106

QA60 CARBON FILAMENT E27 15W
2200K 50lm


9003E101

more optional lamps and technical details
on page 476

6.1

QA60 max. 60W | E27
220-240VAC | 50-60Hz

CE 2.72 kg ⊕ 960° IP20 $\approx 0,9$



2094E0V0



2094E0B0

OPTIONAL

QA60 LED E27 6W
2200K 400lm

9003E109

2700K 650lm

9003E108

T32-300 CARBON FILAMENT E27 15W
2200K 50lm

9003E107

ST64 CARBON FILAMENT E27 15W
2200K 50lm

9003E105

more optional lamps and technical details
on page 476



WIRO










WIRO

6.5

QA60 max. 60W | E27
220-240VAC | 50-60Hz

CE 3,97 kg \oplus 960° IP20 \approx 0,9



2095E0V0



2095E0B0

OPTIONAL

QA60 LED E27 6W
2200K 400lm

9003E109

2700K 650lm

9003E108

T32-300 CARBON FILAMENT E27 15W
2200K 50lm

9003E107

G95 CARBON FILAMENT E27 15W
2200K 50lm

9003E102

more optional lamps and technical details
on page 476






ELLO

13.0

LED 18W | 220-240VAC | 50-60Hz
PCB 3-step | phase-cut dim

CE 2kg ⊕ 96° IP20 $\approx 0,3$



3000K | >85CRI | 940lm



500284W4



500284B4






LOUIS

1.0

LED 55W | 220-240VAC | 50-60Hz
PCB 3-step | dali switch dim

CE 13.26 kg \oplus 960° IP20 \approx 0,5 P



2700K | >85CRI | 3300lm



211185W2






OCTONOM

1.0

12xC35 max. 25W | E14
220-240VAC | 50-60Hz

CE 7.23kg IP20 0.9




2151CON0

OPTIONAL

lampshade 90019107

OPTIONAL

C35 LED E14 2W
2700K 200lm 9019C805

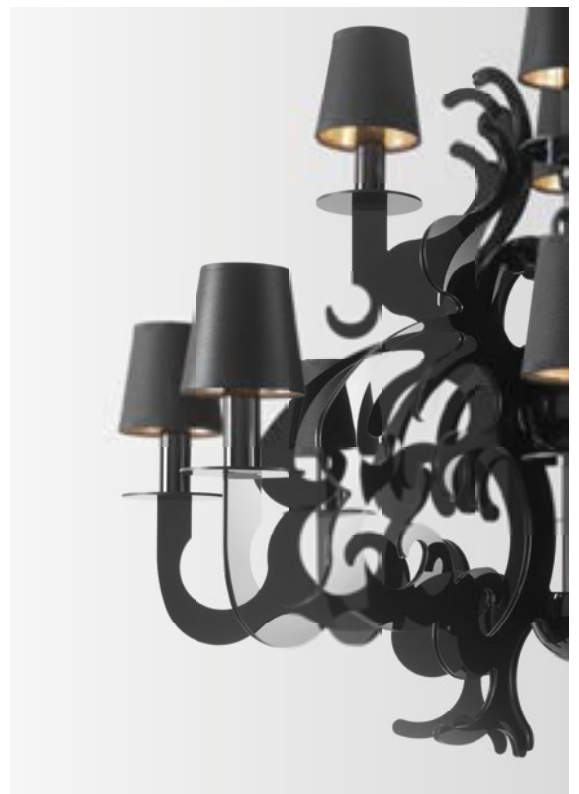



STATE OF ART
MODERN CLASSICS




MACBETH

1.0

LED 42W | 220-240VAC | 50-60Hz
PCB 3-step | dali switch dim

CE 13.4kg | IP20 | 0,5 | P



3000K | >85CRI | 4500lm



212185W4

4000K | >85CRI | 4800lm



212185W6

OPTIONAL

suspension
set4.0m

90015114






GIGANT

10.0

LED 42W | 220-240VAC | 50-60Hz
PCB 3-step | dali switch dim


CE 8.8kg IP20 $\approx 0,3\%$



16.0

LED 83W | 220-240VAC | 50-60Hz
PCB 3-step | dali switch dim

CE 15.3kg IP20 $\approx 0,3\%$



3000K | >85CRI | 5000lm



213185W4

4000K | >85CRI | 5300lm



213185W6

3000K | >85CRI | 9900lm



213285W4

4000K | >85CRI | 10400lm



213285W6

OPTIONAL

suspension
set4.0m

90015114

OPTIONAL

suspension
set4.0m

90015114



GIGANT









SMILE IN

1.0

LED 1/2W | 350-700mA | 3Vf
PCB 3-step | excl. power supply



CE 0.39kg 960° IP65 0,3



2.0

LED 1/2W | 350-700mA | 3Vf
PCB 3-step | excl. power supply

CE 0.42kg 960° IP65 0,3



3000K | >80CRI | 90-150lm



3000K | >80CRI | 90-150lm



ALWAYS USE

power supply
350mA | 4W **90213201**

700mA | 4W **90215201**

more power supplies on page 474

ALWAYS USE

power supply
350mA | 4W **90213201**

700mA | 4W **90215201**

more power supplies on page 474

OPTIONAL

recessed
housing **90012030**

OPTIONAL

recessed
housing **90012030**





HYDRO

1.0

LED 3W | 100-240VAC | 50-60Hz
PCB 3-step | incl. power supply

CE 0.35kg □ 960° IP65 $\approx 0,3^*$ P

□ 40/46/68

■ 68

▨ 4-40



3000K | >80CRI



306143W4



306143C4

4000K | >80CRI



306143W6



306143C6

OPTIONAL

colour filter set

90016101






1.0




LED 2/3W | 350-500mA | 6Vf
PCB 3-step | excl. power supply


CE 0.09kg  960° IP40  0,3 



2.0

LED 2/3W | 350-500mA | 6Vf
PCB 3-step | excl. power supply

CE 0.09kg  960° IP40  0,3 



3000K | >85CRI | 188-260lm

	145181W4
	145181A4
	145181B4

ALWAYS USE

power supply
350mA | 6W **90213202**

500mA | 6W **90214201**

more power supplies on page 474

OPTIONAL

plaster kit **90017103**

recessed housing **90012027**

3000K | >85CRI | 188-260lm

	145281W4
	145281A4
	145281B4

ALWAYS USE

power supply
350mA | 6W **90213202**


500mA | 6W **90214201**

more power supplies on page 474

OPTIONAL

plaster kit **90017103**

recessed housing **90012027**

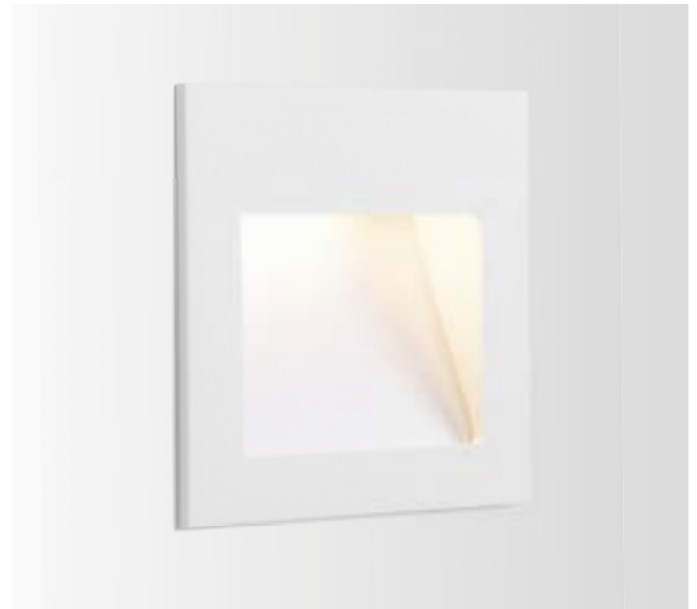





EYE

1.0

LED 1/2W | 350-700mA | 3Vf
PCB 3-step | excl. power supply



CE 0.06kg \varnothing 960° IP20 $\approx 0,3$



2.0

LED 1/2W | 350-700mA | 3Vf
PCB 3-step | excl. power supply

CE 0.07kg \varnothing 960° IP20 $\approx 0,3$



3000K | >80CRI | 90-150lm



3000K | >80CRI | 90-150lm



ALWAYS USE

power supply
350mA | 4W **90213201**

700mA | 4W **90215201**

more power supplies on page 474

ALWAYS USE

power supply
350mA | 4W **90213201**

700mA | 4W **90215201**

more power supplies on page 474

OPTIONAL

recessed
housing **90012025**

OPTIONAL

recessed
housing **90012025**






THEMIS


1.7

LED 5/8W | 500-700mA | 9Vf
PCB 3-step | excl. power supply

CE 0.24kg \varnothing 960° IP20 $\approx 0,3$ TB



3000K | >80CRI | 280-340lm



ALWAYS USE

power supply
500mA | 10W **90214403**

700mA | 10W **90215403**

power supply phase-cut dim
700mA | 10W **90225401**

more power supplies on page 474

OPTIONAL


plaster kit **90017111**

recessed housing **90012032**

2.7

LED 5/8W | 500-700mA | 9Vf
PCB 3-step | excl. power supply

CE 0.31kg \varnothing 960° IP20 $\approx 0,3$ TB



3000K | >80CRI | 280-340lm



ALWAYS USE

power supply
500mA | 10W **90214403**

700mA | 10W **90215403**

power supply phase-cut dim
700mA | 10W **90225401**

more power supplies on page 474

OPTIONAL


plaster kit **90017112**

recessed housing **90012033**

5.0

LED 5/8W | 500-700mA | 9Vf
PCB 3-step | excl. power supply

CE 0.45kg \varnothing 960° IP20 $\approx 0,3$ TB



3000K | >80CRI | 280-340lm



ALWAYS USE

power supply
500mA | 10W **90214403**

700mA | 10W **90215403**

power supply phase-cut dim
700mA | 10W **90225401**

more power supplies on page 474

OPTIONAL

plaster kit **90017115**

recessed housing **90012036**



INTERIOR | WALL RECESSED





THEMIS CARRÉ

0.8

LED 5/8W | 500-700mA | 9Vf
PCB 3-step | excl. power supply

CE 0.15kg 960° IP20 0,3dB

70x73
50
2-18




1.7

LED 5/8W | 500-700mA | 9Vf
PCB 3-step | excl. power supply

CE 0.41kg 960° IP20 0,3dB

163x163
50
2-18




2.7

LED 5/8W | 500-700mA | 9Vf
PCB 3-step | excl. power supply

CE 0.55kg 960° IP20 0,3dB

163x263
50
2-18



3000K | >80CRI | 280-340lm

	303171W4
	303171S4
	303171K4

ALWAYS USE

power supply
500mA | 10W **90214403**

700mA | 10W **90215403**

power supply phase-cut dim
700mA | 10W **90225401**

more power supplies on page 474

OPTIONAL

plaster kit **90017110**

recessed housing **90012031**

3000K | >80CRI | 280-340lm

	303471W4
	303471S4
	303471K4

ALWAYS USE

power supply
500mA | 10W **90214403**

700mA | 10W **90215403**

power supply phase-cut dim
700mA | 10W **90225401**

more power supplies on page 474

OPTIONAL

plaster kit **90017113**

recessed housing **90012034**

3000K | >80CRI | 280-340lm

	303571W4
	303571S4
	303571K4

ALWAYS USE

power supply
500mA | 10W **90214403**

700mA | 10W **90215403**



power supply phase-cut dim
700mA | 10W **90225401**

more power supplies on page 474

OPTIONAL

plaster kit **90017114**

recessed housing **90012035**

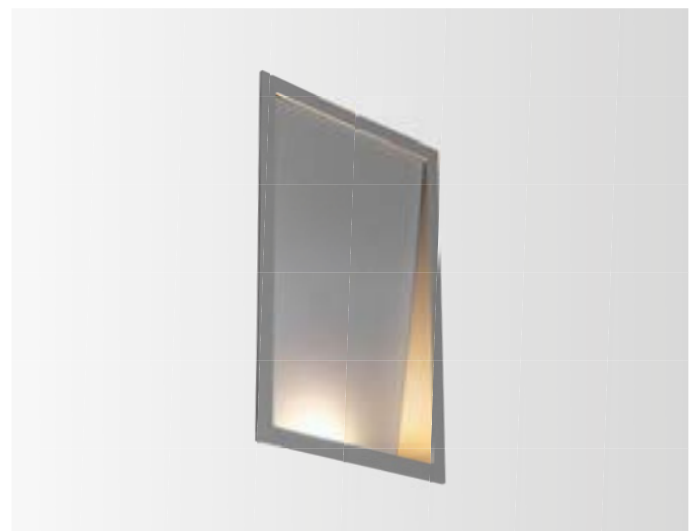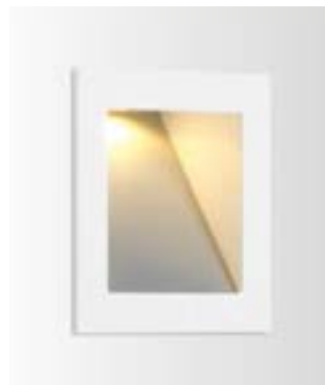




STRANGE

1.7

LED 5/8W | 500-700mA | 9Vf
PCB 3-step | excl. power supply

CE 0.24kg \varnothing 960° IP20 $\approx 0,3$ TB



3000K | >80CRI | 280-340lm



ALWAYS USE

power supply
500mA | 10W **90214403**

700mA | 10W **90215403**



power supply phase-cut dim
700mA | 10W **90225401**

more power supplies on page 474

2.7

LED 5/8W | 500-700mA | 9Vf
PCB 3-step | excl. power supply

CE 0.31kg \varnothing 960° IP20 $\approx 0,3$ TB



3000K | >80CRI | 280-340lm



ALWAYS USE

power supply
500mA | 10W **90214403**

700mA | 10W **90215403**


power supply phase-cut dim
700mA | 10W **90225401**

more power supplies on page 474

5.0

LED 5/8W | 500-700mA | 9Vf
PCB 3-step | excl. power supply

CE 0.45kg \varnothing TE 960° IP20 $\approx 0,3$ TB



3000K | >80CRI | 280-340lm



ALWAYS USE

power supply
500mA | 10W **90214403**

700mA | 10W **90215403**

power supply phase-cut dim
700mA | 10W **90225401**

more power supplies on page 474



INTERIOR | WALL RECESSED




STRANGE CARRÉ

0.8

LED 5/8W | 500-700mA | 9Vf
PCB 3-step | excl. power supply

CE 0.15kg \varnothing 960° IP20 $\approx 0,3$ (10)




3000K | >80CRI | 280-340lm



1.7

LED 5/8W | 500-700mA | 9Vf
PCB 3-step | excl. power supply

CE 0.41kg \varnothing TE 960° IP20 $\approx 0,3$ (10)




3000K | >80CRI | 280-340lm



2.7

LED 5/8W | 500-700mA | 9Vf
PCB 3-step | excl. power supply

CE 0.55kg \varnothing TE 960° IP20 $\approx 0,3$ (10)



3000K | >80CRI | 280-340lm



ALWAYS USE

power supply
500mA | 10W **90214403**

700mA | 10W **90215403**

power supply phase-cut dim
700mA | 10W **90225401**

more power supplies on page 474

ALWAYS USE

power supply
500mA | 10W **90214403**

700mA | 10W **90215403**

power supply phase-cut dim
700mA | 10W **90225401**

more power supplies on page 474

ALWAYS USE

power supply
500mA | 10W **90214403**

700mA | 10W **90215403**

power supply phase-cut dim
700mA | 10W **90225401**

more power supplies on page 474





STRANGE





STRIPE

0.4

LED 1/2W | 350-700mA | 3Vf
PCB 3-step | excl. power supply

CE 0.09kg \varnothing 960° IP20 $\approx 0,3$ TB



3000K | >80CRI | 90-150lm



ALWAYS USE

power supply
350mA | 4W **90213201**

700mA | 4W **90215201**



OPTIONAL

recessed housing
plaster kit **90012037**

0.7

LED 1/2W | 350-700mA | 3Vf
PCB 3-step | excl. power supply

CE 0.10kg \varnothing 960° IP20 $\approx 0,3$ TB



3000K | >80CRI | 90-150lm



ALWAYS USE

power supply
350mA | 4W **90213201**

700mA | 4W **90215201**



OPTIONAL

recessed housing
plaster kit **90012037**

2.2

LED 1/2W | 350-700mA | 3Vf
PCB 3-step | excl. power supply

CE 0.27kg \varnothing 960° IP20 $\approx 0,3$ TB



3000K | >80CRI | 90-150lm



ALWAYS USE

power supply
350mA | 4W **90213201**

700mA | 4W **90215201**

OPTIONAL

recessed housing
plaster kit **90012038**



INTERIOR | WALL RECESSED



STRIPE






SMILE ON

1.0

LED 6W | 220-240VAC | 50-60Hz
COB 2-step | incl. power supply


CE 0.43kg \oplus 960° IP65 $\approx 0,3$ \oplus



2.0

LED 6W | 220-240VAC | 50-60Hz
COB 2-step | incl. power supply

CE 0.65kg \oplus 960° IP65 $\approx 0,3$ \oplus



3000K | >80CRI | 370lm



702253W4



702253L4

3000K | >80CRI | 370lm



703253W4



703253L4






SMILE

1.0

LED 8W | 220-240VAC | 50-60Hz
COB 2-step | incl. PS | phase-cut dim


CE 1.02kg \oplus 960° IP65 \approx 0,3 \oplus



2.0

LED 8W | 220-240VAC | 50-60Hz
COB 2-step | incl. PS | phase-cut dim

CE 0.87kg \oplus 960° IP65 \approx 0,3 \oplus



3000K | >80CRI | 480lm



703354W4



703354L4

3000K | >80CRI | 480lm



703454W4



703454L4






LIGHTDROP

1.2

QT14 max. 40W | G9
220-240VAC | 50-60Hz


CE 0.41kg \oplus 960° IP44 \approx 0,9 $\text{\textcircled{TB}}$



1.8

QT14 max. 40W | G9
220-240VAC | 50-60Hz

CE 0.64kg \oplus 960° IP44 \approx 0,9 $\text{\textcircled{TB}}$



3071V0W0



3071V0C0



3072V0W0



3072V0C0






MOON

1.0

LED 8W | 220-240VAC | 50-60Hz
COB 2-step | incl. PS | phase-cut dim

CE 1.57 kg \oplus 960° IP20 $\approx 0,3$ \oplus



3000K | >80CRI | 480lm



308174W4



308174L4






CENTRAL

1.0

LED 8W | 220-240VAC | 50-60Hz
COB 2-step | incl. PS | phase-cut dim


CE 1kg \oplus 960° IP65 \approx 0,3 $\text{\textcircled{B}}$



2.0

2xLED 4W | 220-240VAC | 50-60Hz
COB 2-step | incl. PS | phase-cut dim

CE 0,94kg \oplus 960° IP65 \approx 0,3 $\text{\textcircled{B}}$



3000K | >80CRI | 480lm



313174W4



313174L4

3000K | >80CRI | 2x290lm



313274W4



313274L4





CENTRAL






STATION

1.0

LED 8W | 220-240VAC | 50-60Hz
COB 2-step | incl. PS | phase-cut dim

CE 0.88kg \oplus 960° IP65 \approx 0,3 $\text{\textcircled{E}}$



3000K | >80CRI | 480lm



314174W4




314174L4

2.0

2xLED 4W | 220-240VAC | 50-60Hz
COB 2-step | incl. PS | phase-cut dim

CE 0.80kg \oplus 960° IP65 \approx 0,3 $\text{\textcircled{E}}$



3000K | >80CRI | 2x290lm



314274W4



314274L4






BENTO

1.3

LED 8W | 220-240VAC | 50-60Hz
COB 2-step | incl. PS | phase-cut dim


CE 0.74kg \oplus 960° IP20 \approx 0,3 \oplus



3.6

LED 8W | 220-240VAC | 50-60Hz
COB 2-step | incl. PS | phase-cut dim

CE 1.48kg \oplus 960° IP20 \approx 0,3 \oplus



3000K | >80CRI | 480lm



309274W4



309274B4

3000K | >80CRI | 480lm



309374W4



309374B4






BENTA

1.3

LED 8W | 220-240VAC | 50-60Hz
COB 2-step | incl. PS | phase-cut dim

CE 0.73kg ⊕ 960° IP20 ⚡0,3⚡ P



3000K | >80CRI | 480lm



310174W4




310174B4

3.6

LED 8W | 220-240VAC | 50-60Hz
COB 2-step | incl. PS | phase-cut dim

CE 1.25kg ⊕ 960° IP20 ⚡0,3⚡ P



3000K | >80CRI | 480lm



310274W4



310274B4






LEENS

1.0

LED 8W | 220-240VAC | 50-60Hz
COB 2-step | incl. PS | phase-cut dim


CE 1.11kg \oplus 960° IP20 \approx 0,3 \oplus



2.0

2xLED 4W | 220-240VAC | 50-60Hz
COB 2-step | incl. PS | phase-cut dim

CE 0.9kg \oplus 960° IP20 \approx 0,3 \oplus



3000K | >80CRI | 480lm



311174W4



311174L4



311174B4

3000K | >80CRI | 2x240lm



311274W4



311274L4



311274B4






INCH

1.5

LED 8W | 220-240VAC | 50-60Hz
COB 2-step | incl. PS | phase-cut dim

CE 0.49kg \oplus 960° IP20 $\approx 0,3^\circ$



3000K | >80CRI | 480lm



312164W4



312164L4




312164B4

2.6

LED 8W | 220-240VAC | 50-60Hz
COB 2-step | incl. PS | phase-cut dim

CE 0.40kg \oplus 960° IP20 $\approx 0,3^\circ$



3000K | >80CRI | 480lm



312264W4



312264L4




312264B4

5.4

LED 8W | 220-240VAC | 50-60Hz
COB 2-step | incl. PS | phase-cut dim

CE 0.65kg \oplus 960° IP20 $\approx 0,3^\circ$



3000K | >80CRI | 480lm



312364W4



312364L4



312364B4






ARZY

1.0

LED 6W | 110-240VAC | 50-60Hz
COB 3-step | incl. power supply

CE 1.56 kg \oplus 960° IP20 \pm 0.3 \oplus



3000K | >80CRI | 380lm




325163W4



325163C4



325163B4

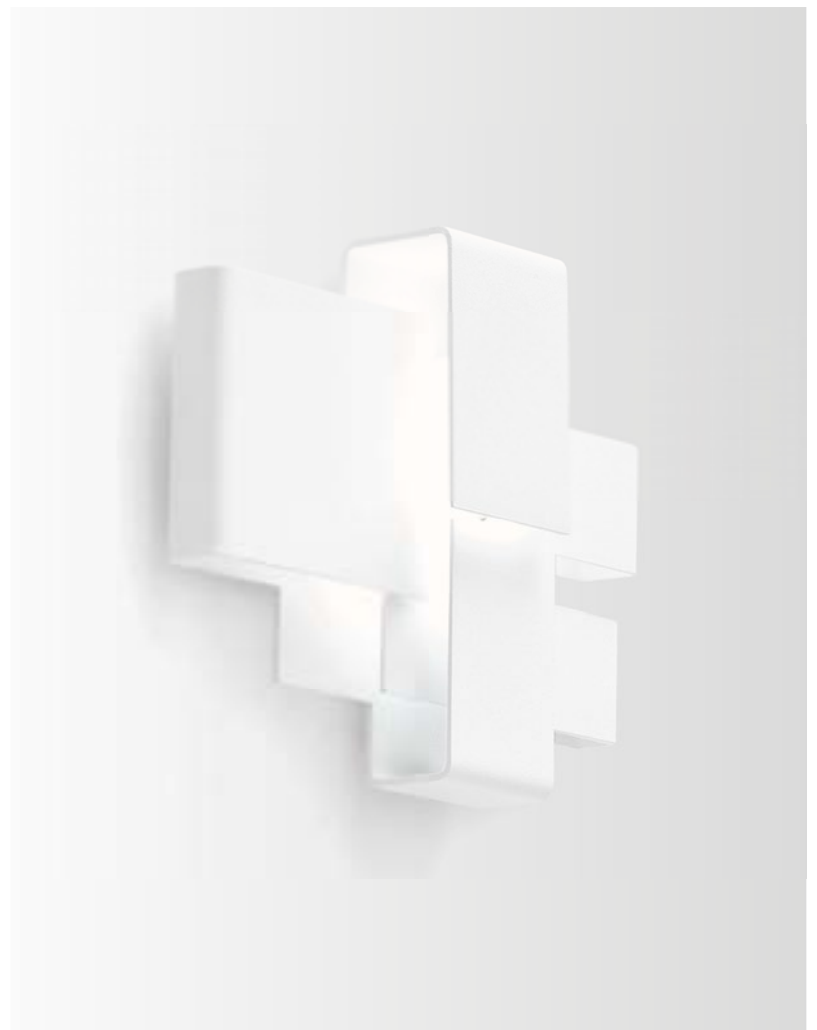






WAHAA

1.0

2xLED 6W | 110-240VAC | 50-60Hz
COB 3-step | incl. power supply

CE 2.1kg \oplus 960° IP20 \approx 0,3



3000K | >80CRI | 2x480lm



324173W4



324173B4





TRAIN

1.0

LED 6W | 220-240VAC | 50-60Hz
COB 2-step | incl. power supply


CE 0.24kg ⊕ 960° IP65 ⚡0,3⚡ Ⓢ



2.0

2xLED 6W | 220-240VAC | 50-60Hz
COB 2-step | incl. power supply

CE 0.35kg ⊕ 960° IP65 ⚡0,3⚡ Ⓢ



3000K | >80CRI | 420lm



719163W4



719163L4

3000K | >80CRI | 2x290lm



719263W4



719263L4






BOX mini

1.0

PAR16 max. 50W | GU10
220-240VAC | 50-60Hz

CE 0.24kg \oplus 960° IP20 \approx 0,9



300120W0



300120L0



300120B0

OPTIONAL

PAR16 LED GU10 6W phase-cut dim
2700K 390lm **901228W2**


3000K 410lm **901228W4**

PAR16 LED GU10 7W ambient white dim
1800-3000K **901229S9**

2.0

2xPAR16 max. 50W | GU10
220-240VAC | 50-60Hz

CE 0.44kg \oplus 960° IP20 \approx 0,9



301120W0



301120L0




301120B0

OPTIONAL

PAR16 LED GU10 6W phase-cut dim
2700K 390lm **901228W2**

3000K 410lm **901228W4**

PAR16 LED GU10 7W ambient white dim
1800-3000K **901229S9**

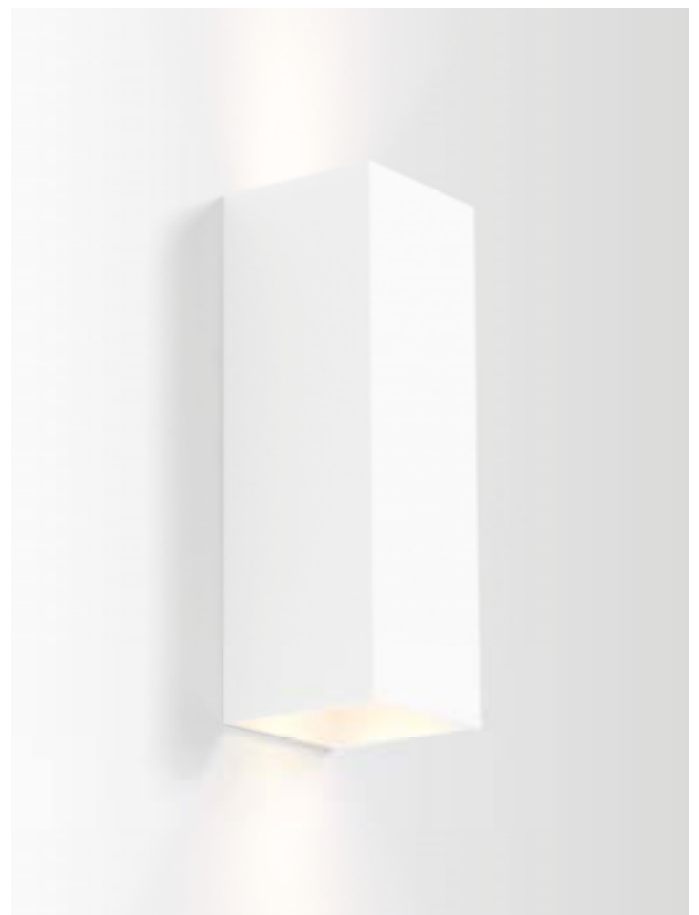




BOX

1.0 LED

LED 4W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim


CE 0.6 kg ⊕ 960° IP20 $\approx 0,3$



1.0 QT14

QT14 max 75W | G9
220-240VAC | 50-60Hz


CE 0.66 kg ⊕ 960° IP20 $\approx 0,9$



2.0 LED

2xLED 4W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim


CE 0.67 kg ⊕ 960° IP20 $\approx 0,3$



3.0 LED

2xLED 4W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim

CE 0.86 kg ⊕ 960° IP20 $\approx 0,3$



2200K | >80CRI | 315lm




321164G1

321164Q1

321164B1

3000K | >80CRI | 420lm



321164W4

321164L4

321164G4

321164Q4

321164B4



3211G0W0



3211G0L0



3211G0G0



3211G0Q0



3211G0B0

OPTIONAL
QT14 LED 3W
3000K 300lm


9019G704

OPTIONAL
flaps for adjustable beam angle



900401W0

2200K | >80CRI | 2x315lm




321144G1

321144Q1

321144B1

3000K | >80CRI | 2x340lm



321144W4

321144L4

321144G4

321144Q4

321144B4

OPTIONAL
flaps for adjustable beam angle



900401W0

2200K | >80CRI | 2x315lm




321244G1

321244Q1

321244B1

3000K | >80CRI | 2x340lm



321244W4

321244L4

321244G4

321244Q4

321244B4

OPTIONAL
flaps for adjustable beam angle



900401W0






RAY mini

1.0

PAR16 max. 50W | GU10
220-240VAC | 50-60Hz

CE 0.21 kg \oplus 960° IP20 \approx 0,9



300220W0



300220L0



300220B0

OPTIONAL

PAR16 LED GU10 6W phase-cut dim
2700K 390lm **901228W2**


3000K 410lm **901228W4**

PAR16 LED GU10 7W ambient white dim
1800-3000K **901229S9**

2.0

2xPAR16 max. 50W | GU10
220-240VAC | 50-60Hz

CE 0.36 kg \oplus 960° IP20 \approx 0,9



301220W0



301220L0



301220B0

OPTIONAL

PAR16 LED GU10 6W phase-cut dim
2700K 390lm **901228W2**

3000K 410lm **901228W4**

PAR16 LED GU10 7W ambient white dim
1800-3000K **901229S9**






1.0 LED

LED 4W | 220-240VAC | 50-60Hz
PCB 2-step | incl. PS | phase-cut dim


CE 0.68kg ⊕ 960° IP20 ⚡0,3⚡



1.0 QT14

QT14 max 75W | G9
220-240VAC | 50-60Hz


CE 0.62kg ⊕ 960° IP20 ⚡0,9⚡



2.0 LED

2xLED 4W | 220-240VAC | 50-60Hz
PCB 2-step | incl. PS | phase-cut dim


CE 0.69kg ⊕ 960° IP20 ⚡0,3⚡



3.0 LED

2xLED 4W | 220-240VAC | 50-60Hz
PCB 2-step | incl. PS | phase-cut dim



CE 0.91kg ⊕ 960° IP20 ⚡0,3⚡



2200K | >80CRI | 315lm



3000K | >80CRI | 420lm



OPTIONAL
QT14 LED 3W
3000K 300lm **9019G704**


OPTIONAL
flaps for adjustable beam angle



2200K | >80CRI | 2x315lm



3000K | >80CRI | 2x340lm




OPTIONAL
flaps for adjustable beam angle



2200K | >80CRI | 2x315lm



3000K | >80CRI | 2x340lm

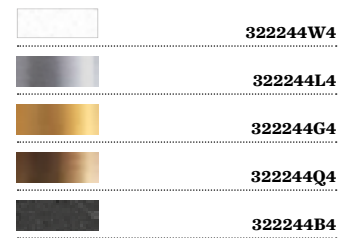

OPTIONAL
flaps for adjustable beam angle





DOCUS mini

1.0

PAR16 max. 50W | GU10
220-240VAC | 50-60Hz

CE 0.24kg \oplus 960° IP20 \approx 0,9



	300320W0
	300320L0
	300320G0
	300320B0

OPTIONAL

PAR16 LED GU10 6W phase-cut dim
2700K 390lm **901228W2**

3000K 410lm **901228W4**


PAR16 LED GU10 7W ambient white dim
1800-3000K **901229S9**



2.0

2xPAR16 max. 50W | GU10
220-240VAC | 50-60Hz

CE 0.43kg \oplus 960° IP20 \approx 0,9



	301320W0
	301320L0
	301320G0
	301320B0

OPTIONAL

PAR16 LED GU10 6W phase-cut dim
2700K 390lm **901228W2**

3000K 410lm **901228W4**

PAR16 LED GU10 7W ambient white dim
1800-3000K **901229S9**






HEXO mini

1.0

PAR16 max. 50W | GU10
220-240VAC | 50-60Hz

CE 0.23kg \oplus 960° IP20 \approx 0,9



	300420G0
	300420Q0
	300420B0

OPTIONAL

PAR16 LED GU10 6W phase-cut dim
2700K 390lm **901228W2**

3000K 410lm **901228W4**


PAR16 LED GU10 7W ambient white dim
1800-3000K **901229S9**



2.0

2xPAR16 max. 50W | GU10
220-240VAC | 50-60Hz

CE 0.40kg \oplus 960° IP20 \approx 0,9



	301420G0
	301420Q0
	301420B0

OPTIONAL

PAR16 LED GU10 6W phase-cut dim
2700K 390lm **901228W2**

3000K 410lm **901228W4**

PAR16 LED GU10 7W ambient white dim
1800-3000K **901229S9**






CURVUS

6.0

⇒ 2xT16 14W | G5
220-240VAC | 50-60Hz | EVG


CE 1.86 kg ⊕ 960° IP20 ⚡0,5 Ⓟ



9.0

⇒ 2xT16 21W | G5
220-240VAC | 50-60Hz | EVG


CE 2.53 kg ⊕ 960° IP20 ⚡0,5 Ⓟ



12.0

⇒ 2xT16 28W | G5
220-240VAC | 50-60Hz | EVG


CE 3.19 kg ⊕ 960° IP20 ⚡0,5 Ⓟ



15.0

⇒ 2xT16 35W | G5
220-240VAC | 50-60Hz | EVG

CE 3.64 kg ⊕ 960° IP20 ⚡0,5 Ⓟ



3161T3L0



3162T3L0



3163T3L0



3164T3L0






MILES

2.0 CARRÉ

LED 8W | 100-240V | COB 3-step
50-60Hz | incl. power supply

CE 0.57 kg \oplus 960° IP20 \approx 0,3 P



3000K | >80CRI | 420lm



317173W4



317173L4




317173B4

9.0

LED 18W | 100-240V | COB 3-step
50-60Hz | incl. PS | phase-cut dim

CE 1.41 kg \oplus 960° IP20 \approx 0,3 P



3000K | >80CRI | 690lm



317274W4



317274L4




317274B4

12.0

LED 25W | 100-240V | COB 3-step
50-60Hz | incl. PS | phase-cut dim

CE 2.10 kg \oplus 960° IP20 \approx 0,3 P



3000K | >80CRI | 920lm



317374W4



317374L4



317374B4






YARD

10.0

⇒ T16 14W | G5
220-240VAC | 50-60Hz | EVG

CE 1.57kg \oplus 960° IP20 \approx 0,5 P



3181T3W0



3181T3S0








J.J.W.

01

QA60 max. 53W | E27
220-240VAC | 50-60Hz

CE 2.92kg ⊕ 960° IP20 $\approx 0,9$



2054E8S0



2054E8G0

OPTIONAL

QA60 LED E27 6W
2200K 400lm

9003E109

2700K 650lm

9003E108








J.J.W.

02

QA60 max. 53W | E27
220-240VAC | 50-60Hz

CE 1.02 kg ⊕ 960° IP20 ⚡0,9



2055E880



2055E8G0

OPTIONAL

QA60 LED E27 6W
2200K 400lm

9003E109

2700K 650lm

9003E108







J.J.W.



3.0

LED 4W | 24VDC
PCB 3-step | excl. power supply

CE 0.25kg \varnothing 960° IP20 \pm 0,3



6.0

LED 8W | 24VDC
PCB 3-step | excl. power supply


CE 0.25kg \varnothing 960° IP20 \pm 0,3



9.0

LED 12W | 24VDC
PCB 3-step | excl. power supply

CE 0.25kg \varnothing 960° IP20 \pm 0,3



3000K | >80CRI | 210lm



31916204

3000K | >80CRI | 420lm



31926204

3000K | >80CRI | 630lm



31936204

ALWAYS USE

LED 12W
24VDC

90212401

more accessories on page 487

ALWAYS USE

LED 12W
24VDC

90212401

more accessories on page 487

ALWAYS USE

LED 12W
24VDC

90212401

more accessories on page 487








EXTERIOR


take a look outside.

**CEILING
RECESSED**




NOTE 343

**CEILING
SURFACE**



BOX 345



RAY 347



ROB 349




SCAPE 351


**WALL
RECESSED**




SMILE IN 355



KNOB 359



SKÖLL 361




ORIS 363



ATIM 365


**WALL
SURFACE**




SMILE ON 369




TUBE 373



TUBE CARRÉ 375



STAR 381




GETTON 383




SMILE 385


STATION



TRAIN 395




TAPE 397




BOX 399



RAY 401




BOXX 403



PALOS 405

**FLOOR
RECESSED**



CARD 417



MAP 419




FLIP 423



CHART 425



CHIP 427



DRUM 429

**FLOOR
SURFACE**



FIFTYFIFTY 431



SMILE 435



SWAY 437



PALOS 439



EDGE 443




TAPE 445

**FLOOR
PROJECTOR**



STAKE 461



X-BEAM 465

SCULPTURE



J.M. 469



ALICE 473

EXTERIOR

pick up your right light.




CENTRAL 387



X-BEAM 409



BLOCK 411



SCAPE 415



PACE 447



LINUS 449



GETTON 451



PALLUZ 453



POLAR 457



SCAPE 459






NOTE

0.9

LED 4/6W | 350-500mA | 9Vf
COB 2-step | excl. power supply

CE 0.35kg 960° IP54 A38°

85
 80
 4-25




1.2


LED 7/10W | 350-500mA | 18Vf
COB 3-step | excl. power supply

CE 0.76kg 960° IP54 A38°

110
 100
 4-25



3000K | >80CRI | 280-370lm



704161E4

3000K | >80CRI | 525-680lm



704261E4

ALWAYS USE
power supply IP67
350mA | 7W

90213301

500mA | 7W

90214301

more power supplies on page 474

ALWAYS USE
power supply IP67
350mA | 7W

90213301

500mA | 12W

90214402

power supply phase-cut dim IP20
500mA | 15W

90224501

more power supplies on page 474






BOX

1.0

LED 8W | 220-240VAC | 50-60Hz
COB 2-step | incl. PS | phase-cut dim

CE 0.67kg \oplus 960° IP65 \approx 0,3 \oplus A 36°



3000K | >80CRI | 480lm



146164W4



146164D4



146164B4



OPTIONAL
inner cover



911011W1



911011D1



911011B1



EXTERIOR | CEILING SURFACE




RAY

1.0

LED 8W | 220-240VAC | 50-60Hz
COB 2-step | incl. PS | phase-cut dim

CE 0.63kg \oplus 960° IP65 \approx 0,3 \oplus A 36°



3000K | >80CRI | 480lm



146764W4



146764D4



146764B4



OPTIONAL
inner cover



911041W1



911041D1



911041B1




EXTERIOR | CEILING SURFACE



1.6

LED 8W | 220-240VAC | 50-60Hz
PCB 3-step | incl. power supply


CE 0.80 kg \oplus 960° IP44 ≈ 0.3 \oplus



2.6

LED 12W | 220-240VAC | 50-60Hz
COB 3-step | incl. power supply


CE 1.30 kg \oplus 960° IP44 ≈ 0.3 \oplus



3.5

LED 20W | 220-240VAC | 50-60Hz
COB 3-step | incl. power supply

CE 2.00 kg \oplus 960° IP44 ≈ 0.3 \oplus



3000K | >80CRI | 600lm



701183W4



701183S4

3000K | >80CRI | 1000lm



701283W4



701283S4

3000K | >80CRI | 1600lm



701383W4



701383S4






SCAPE

8.0

⇒ T16 14W | G5
220-240VAC | 50-60Hz | EVG

CE 2.47 kg ⊕ 960° IP65 $\approx 0,5$ P




7051T3T0

11.0

⇒ T16 21W | G5
220-240VAC | 50-60Hz | EVG

CE 3.36 kg ⊕ 960° IP65 $\approx 0,5$ P




7052T3T0

14.0

⇒ T16 28W | G5
220-240VAC | 50-60Hz | EVG

CE 4.46 kg ⊕ 960° IP65 $\approx 0,5$ P



7053T3T0



SCAPE









SMILE IN

1.0

LED 1/2W | 350-700mA | 3Vf
PCB 3-step | excl. power supply



CE 0.39kg \varnothing 960° IP65 \approx 0,3 \oplus



2.0

LED 1/2W | 350-700mA | 3Vf
PCB 3-step | excl. power supply

CE 0.42kg \varnothing 960° IP65 \approx 0,3 \oplus



3000K | >80CRI | 90-150lm

	702151W4
	702151D4

3000K | >80CRI | 90-150lm

	703151W4
	703151D4

ALWAYS USE

power supply IP66
350mA | 3W

90213101

700mA | 3W **90215101**

more power supplies on page 474

ALWAYS USE

power supply IP66
350mA | 3W

90213101

700mA | 3W **90215101**

more power supplies on page 474

OPTIONAL

recessed
housing

90012030

OPTIONAL

recessed
housing

90012030



SMILE IN AND OUT





KNOB

1.0


LED 3W | 100-240VAC | 50-60Hz
PCB 3-step | incl. power supply

CE 0.35kg □ 960° IP65 $\approx 0,3$ Ⓟ

□ 40/46/68

■ 68

▨ 4-40



3000K | >80CRI | 60lm



706143W4



706143T4



706143B4

4000K | >80CRI | 60lm



706143W6



706143T6




706143B6

OPTIONAL

colour filter set

90016102

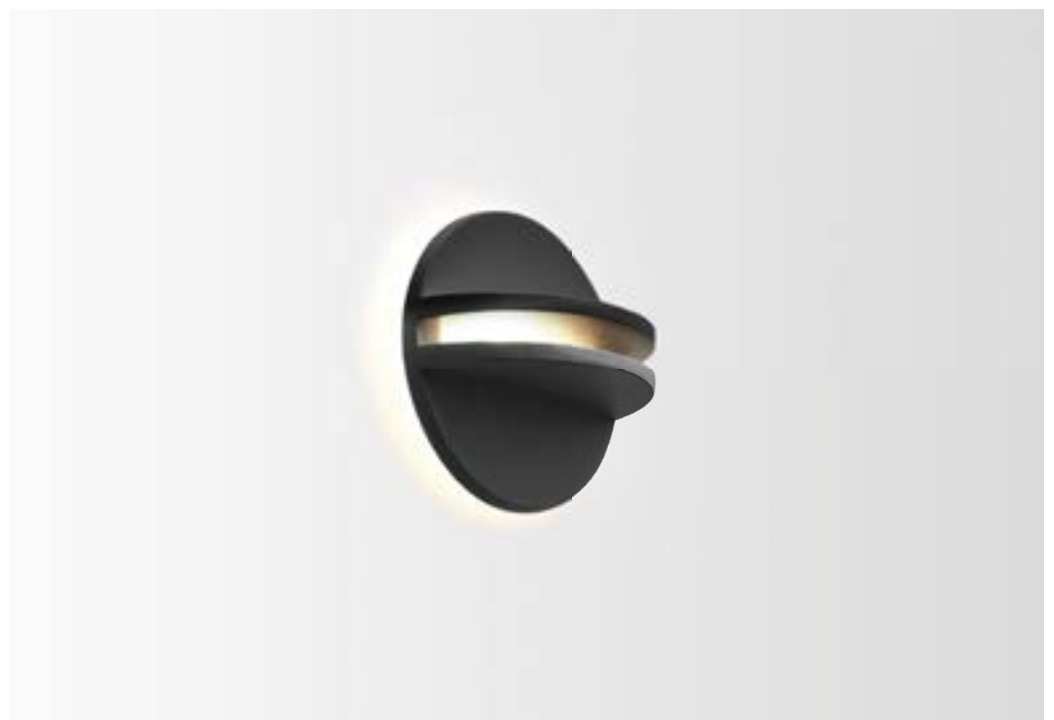



SKÖLL

1.0

LED 3W | 100-240VAC | 50-60Hz
PCB 3-step | incl. power supply

CE 0.30kg □ 960° IP65 $\approx 0,3$ P

□ 40/46/68
■ 68
▨ 4-40




2.0

LED 3W | 100-240VAC | 50-60Hz
PCB 3-step | incl. power supply

CE 0.31kg □ 960° IP65 $\approx 0,3$ P

□ 40/46/68
■ 68
▨ 4-40



3000K | >80CRI | 60lm

	708143W4
	708143T4
	708143B4

4000K | >80CRI | 70lm

	708143W6
	708143T6
	708143B6

3000K | >80CRI | 60lm

	708243W4
	708243T4
	708243B4

4000K | >80CRI | 70lm



	708243W6
	708243T6
	708243B6

OPTIONAL

colour filter set **90016103**

OPTIONAL

colour filter set **90016104**

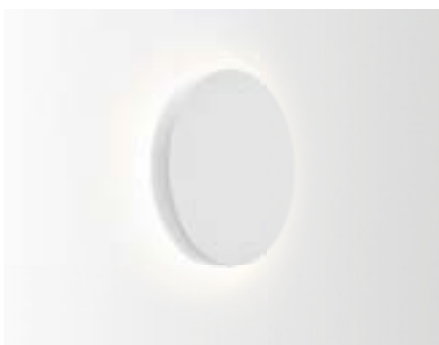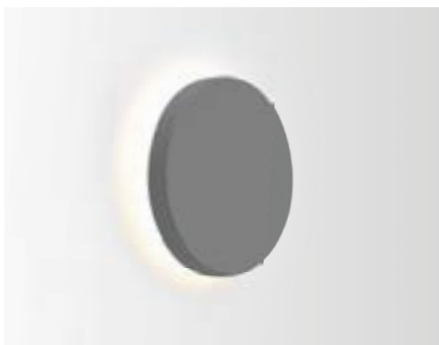




0.7

LED 1/2W | 350-700mA | 3Vf
PCB 3-step | excl. power supply

CE 0.28kg 960° IP65 0,3 P



3000K | >80CRI | 90-150lm



ALWAYS USE

power supply IP66
350mA | 3W **90213101**

700mA | 3W **90215101**

OPTIONAL


recessed housing
plaster kit **90012039**

concrete
housing **90012044**

1.3

LED 2/4W | 350-700mA | 6Vf
PCB 3-step | excl. power supply

CE 0.34kg 960° IP65 0,3 P



3000K | >80CRI | 180-300lm



ALWAYS USE

power supply IP66
350mA | 3W **90213101**

700mA | 6W **90215202**

OPTIONAL



recessed housing
plaster kit **90012041**

concrete
housing **90012040**

2.0

LED 2/4W | 350-700mA | 6Vf
PCB 3-step | excl. power supply

CE 0.42kg 960° IP65 0,3 P



3000K | >80CRI | 180-300lm



ALWAYS USE


power supply IP66
350mA | 3W **90213101**

700mA | 6W **90215202**

OPTIONAL

recessed housing
plaster kit **90012043**

concrete
housing **90012042**

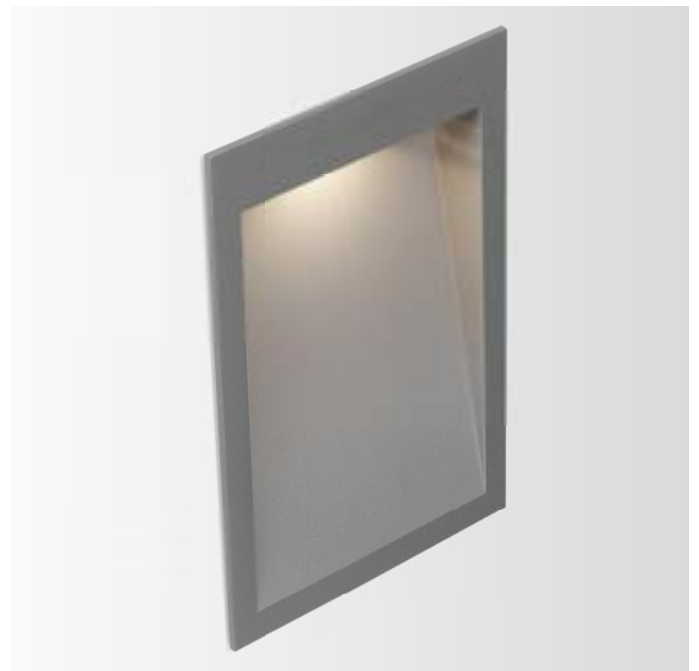



ATIM

1.0 LED

LED 6W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim

CE 0.85kg ⊕ 960° IP65 ⚡0,3 Ⓢ

82x193

95



1.0 TC-S

TC-S7W | G23 | 50-60Hz | WG

CE 1.42kg ⊕ 960° IP65 ⚡0,5 Ⓢ

82x193

95



3000K | >80CRI | 380lm



71018414



7101S710

OPTIONAL

louvre

90019106

OPTIONAL

louvre

90019106






ATIM CARRÉ


2.0 LED

LED 6W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim

CE 0.65kg \oplus 960° IP65 $\approx 0,3$ TM

  108x108

  86




2.0 TCR

TCR-TSE 7W | GX 53
220-240VAC | 50-60Hz

CE 0.65kg \oplus 960° IP65 $\approx 0,5$ TM

  108x108

  86



3000K | >80CRI | 380lm



71028414



7102P010

OPTIONAL

louvre

90019105

OPTIONAL

TCR LED 6W
3000K 450lm

901348W4

louvre

90019105







SMILE ON

1.0

LED 6W | 220-240VAC | 50-60Hz
COB 2-step | incl. power supply


CE 0.43kg ⊕ 960° IP65 ⚡0,3⚡ Ⓢ



2.0

LED 6W | 220-240VAC | 50-60Hz
COB 2-step | incl. power supply

CE 0.65kg ⊕ 960° IP65 ⚡0,3⚡ Ⓢ



3000K | >80CRI | 370lm



702253W4



702253D4

3000K | >80CRI | 370lm




703253W4



703253D4





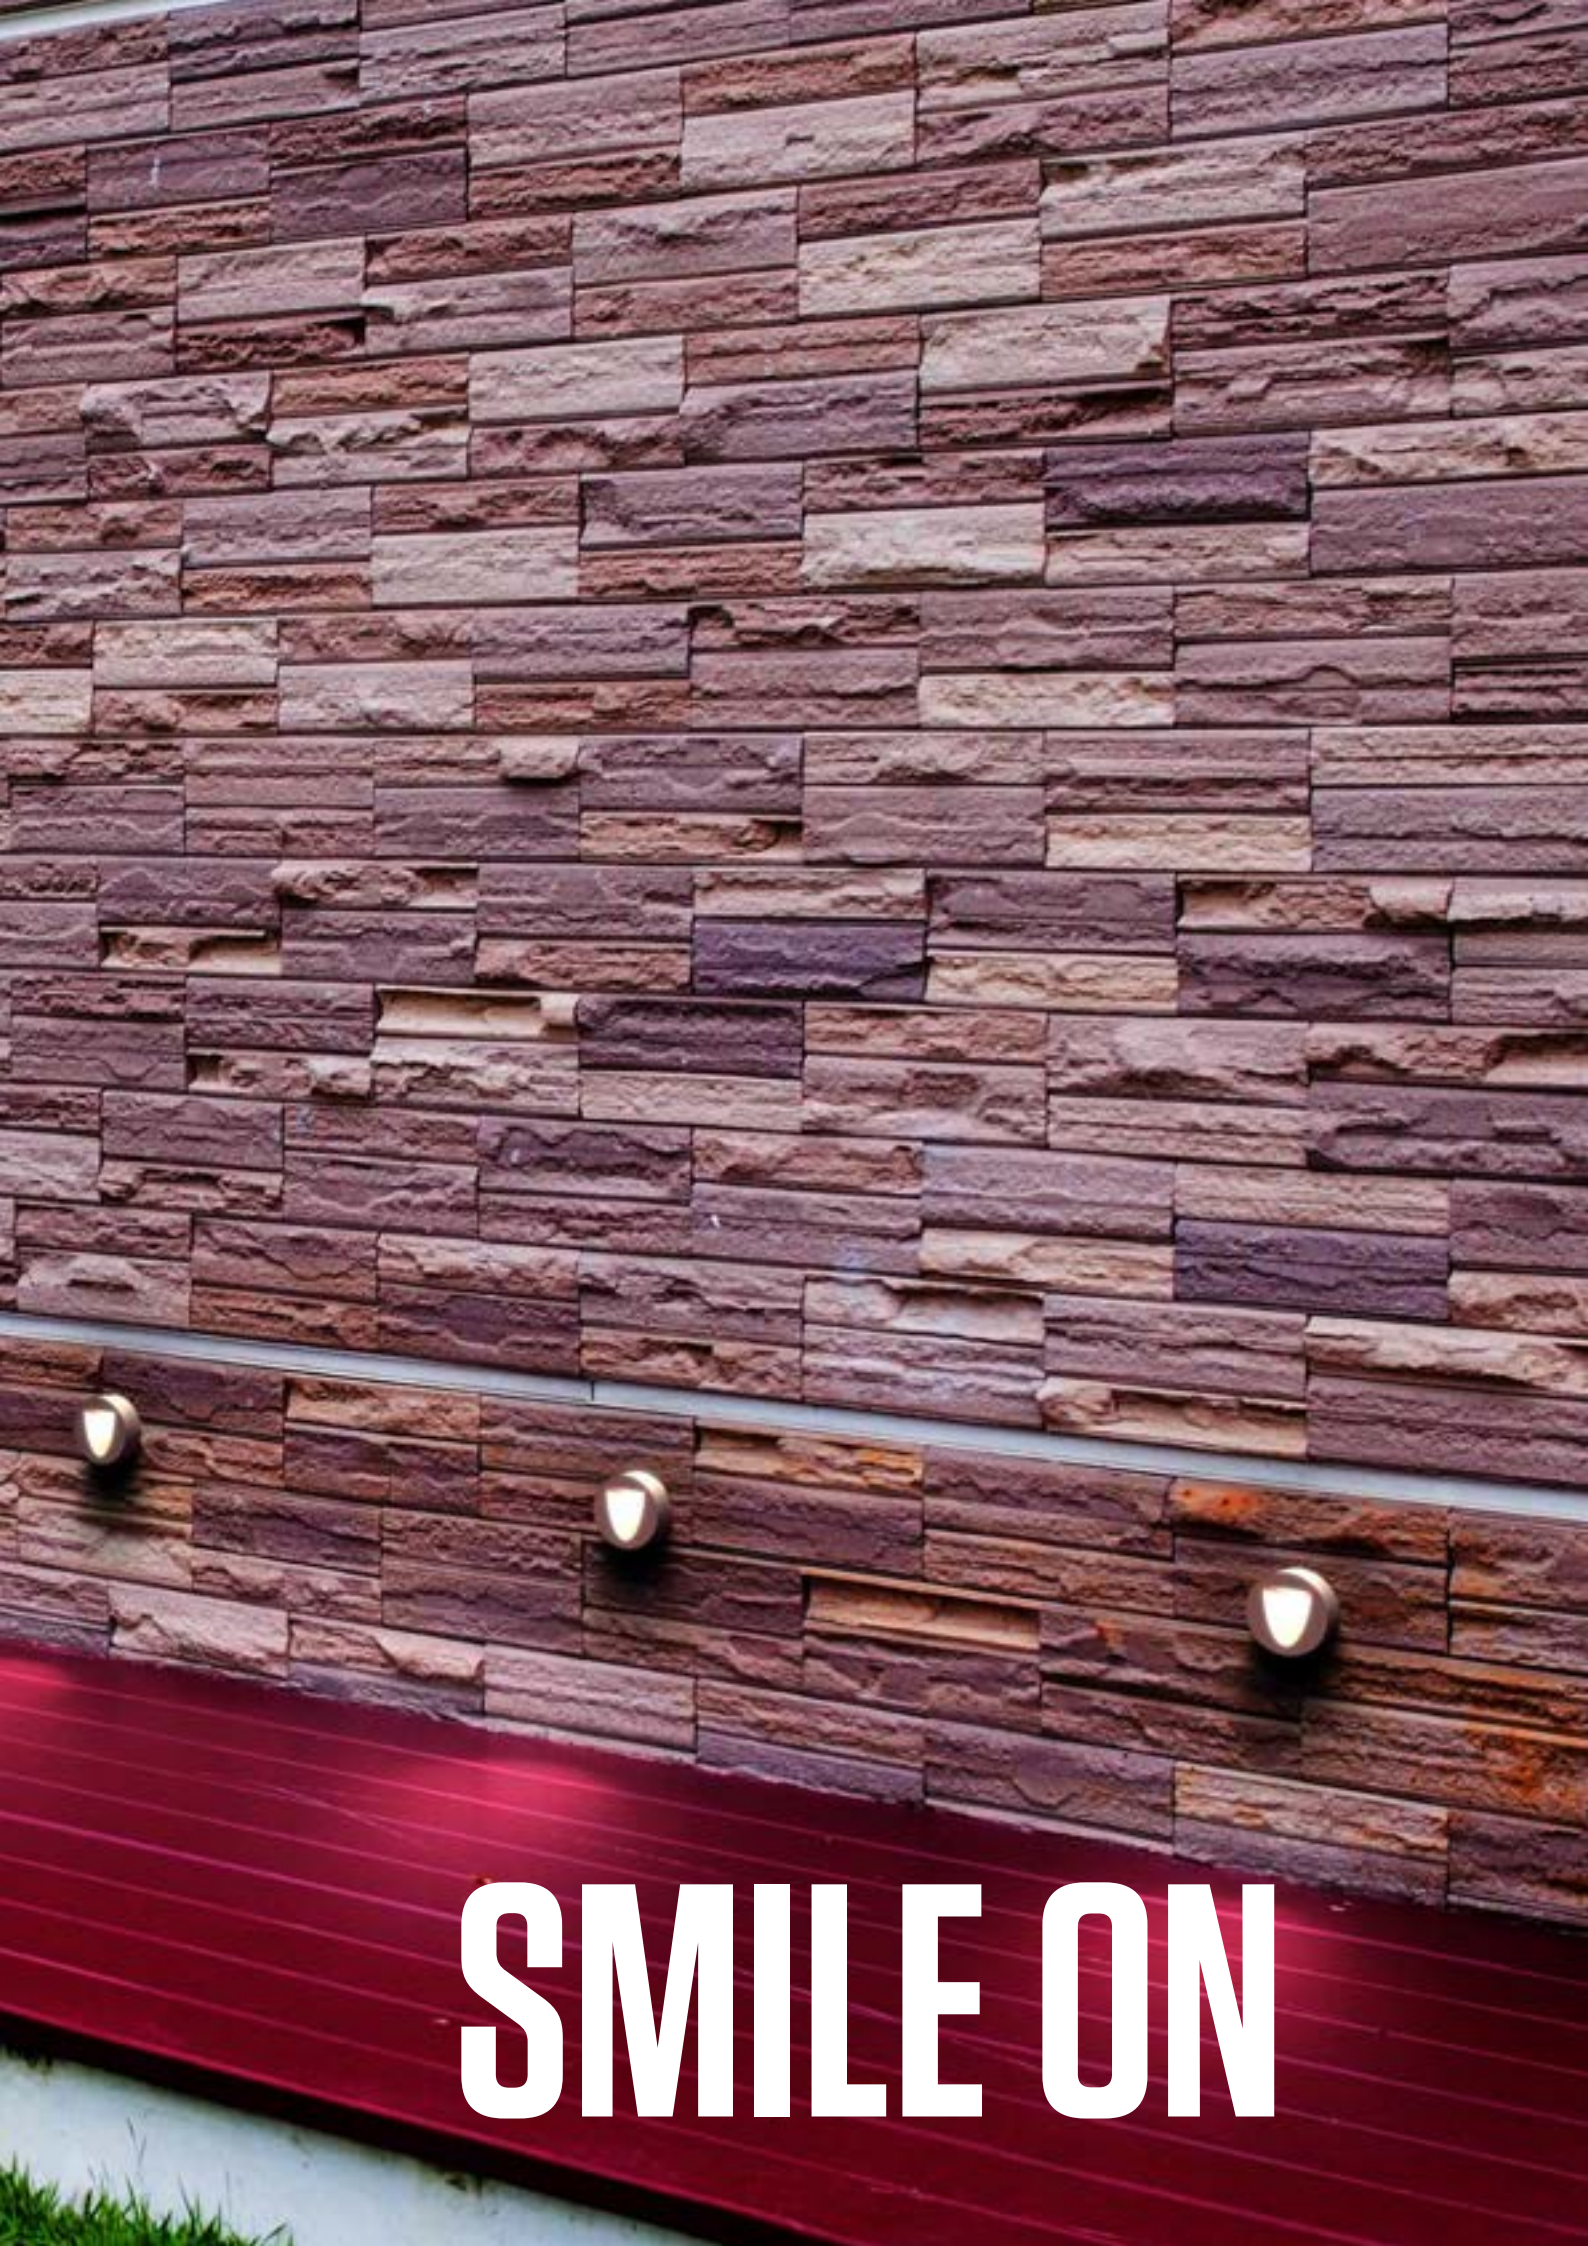

SMILE ON




TUBE

1.0 LED

LED 8W | 220-240VAC | 50-60Hz
COB2-step | incl. PS | phase-cut dim


CE 0.81kg \oplus 960° IP65 \approx 0,3 \odot Λ 38°



1.0 PAR16

PAR16 max. 50W | GU10
220-240VAC | 50-60Hz


CE 0.41kg \oplus 960° IP55 \approx 0,9 \odot



2.0 LED

2xLED 8W | 220-240VAC | 50-60Hz
COB2-step | incl. PS | phase-cut dim


CE 1.33kg \oplus 960° IP65 \approx 0,3 \odot Λ 38°



2.0 PAR16

2xPAR16 max. 50W | GU10
220-240VAC | 50-60Hz

CE 0.59kg \oplus 960° IP55 \approx 0,9 \odot



3000K | >80CRI | 480lm



711164W4



711164D4



711120W0



711120D0



711120B0

3000K | >80CRI | 2x480lm



711264W4



711264D4



711220W0



711220D0



711220B0

OPTIONAL

PAR16 LED GU10 6W phase-cut dim
2700K 390lm **901228W2**

3000K 410lm **901228W4**

PAR16 LED GU10 7W ambient white dim
1800-3000K **901229S9**

OPTIONAL

PAR16 LED GU10 6W phase-cut dim
2700K 390lm **901228W2**

3000K 410lm **901228W4**

PAR16 LED GU10 7W ambient white dim
1800-3000K **901229S9**






TUBE CARRÉ

1.0

PAR16 max. 50W | GU10
220-240VAC | 50-60Hz


CE 0.86kg \oplus 960° IP55 \approx 0,9 \oplus



2.0

2xPAR16 max. 50W | GU10
220-240VAC | 50-60Hz

CE 1.53kg \oplus 960° IP55 \approx 0,9 \oplus



712120W0



712120A0



712120B0



712220W0



712220A0



712220B0

OPTIONAL

PAR16 LED GU10 6W phase-cut dim
2700K 390lm **901228W2**

3000K 410lm **901228W4**

PAR16 LED GU10 7W ambient white dim
1800-3000K **901229S9**

OPTIONAL

PAR16 LED GU10 6W phase-cut dim
2700K 390lm **901228W2**

3000K 410lm **901228W4**

PAR16 LED GU10 7W ambient white dim
1800-3000K **901229S9**






TUBE CARRÉ

3.0

2xPAR16 max. 50W | GU10
220-240VAC | 50-60Hz

CE 1.52kg \oplus 960° IP55 $\approx 0,9$ \oplus



712320W0



712320A0



712320B0

OPTIONAL

PAR16 LED GU10 6W phase-cut dim
2700K 390lm **901228W2**

3000K 410lm **901228W4**

PAR16 LED GU10 7W ambient white dim
1800-3000K **901229S9**







TUBE CARRÉ




STAR

1.0

QT14 max. 40W | G9
220-240VAC | 50-60Hz

CE 0.4kg 960° IP54 0,9



7131V010

OPTIONAL
QT14 LED 3W
3000K 200lm

9019G704






96

GETTON

1.0

LED 8W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim

CE 0.83kg \oplus 960° IP65 \approx 0,3 \oplus



3000K | >85CRI | 665lm | opal glass



717474W4



717474D4

OPTIONAL

big cover



911141W1




911141D1



2.0

LED 8W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim

CE 0.83kg \oplus 960° IP65 \approx 0,3 \oplus



3000K | >85CRI | 720lm | clear glass



717374W4



717374D4

OPTIONAL

big cover



911141W1



911141D1






SMILE

1.0

LED 8W | 220-240VAC | 50-60Hz
COB 2-step | incl. PS | phase-cut dim


CE 1.02kg \oplus 960° IP65 \approx 0,3 \oplus



2.0

LED 8W | 220-240VAC | 50-60Hz
COB 2-step | incl. PS | phase-cut dim

CE 0.87kg \oplus 960° IP65 \approx 0,3 \oplus



3000K | >80CRI | 480lm



703354W4



703354D4

3000K | >80CRI | 480lm



703454W4



703454D4






CENTRAL

1.0

LED 8W | 220-240VAC | 50-60Hz
COB 2-step | incl. PS | phase-cut dim


CE 0.91kg \oplus 960° IP65 \approx 0,3 \oplus



2.0

2xLED 4W | 220-240VAC | 50-60Hz
COB 2-step | incl. PS | phase-cut dim

CE 0.91kg \oplus 960° IP65 \approx 0,3 \oplus



3000K | >80CRI | 480lm



313174W4



313174D4

3000K | >80CRI | 2x290lm



313274W4



313274D4







CENTRAL




STATION

1.0

LED 8W | 220-240VAC | 50-60Hz
COB 2-step | incl. PS | phase-cut dim


CE 0.66kg \oplus 960° IP65 $\approx 0,3$ \oplus



2.0

2xLED 4W | 220-240VAC | 50-60Hz
COB 2-step | incl. PS | phase-cut dim

CE 0.66kg \oplus 960° IP65 $\approx 0,3$ \oplus



3000K | >80CRI | 480lm



314174W4



314174D4


3000K | >80CRI | 2x290lm



314274W4



314274D4

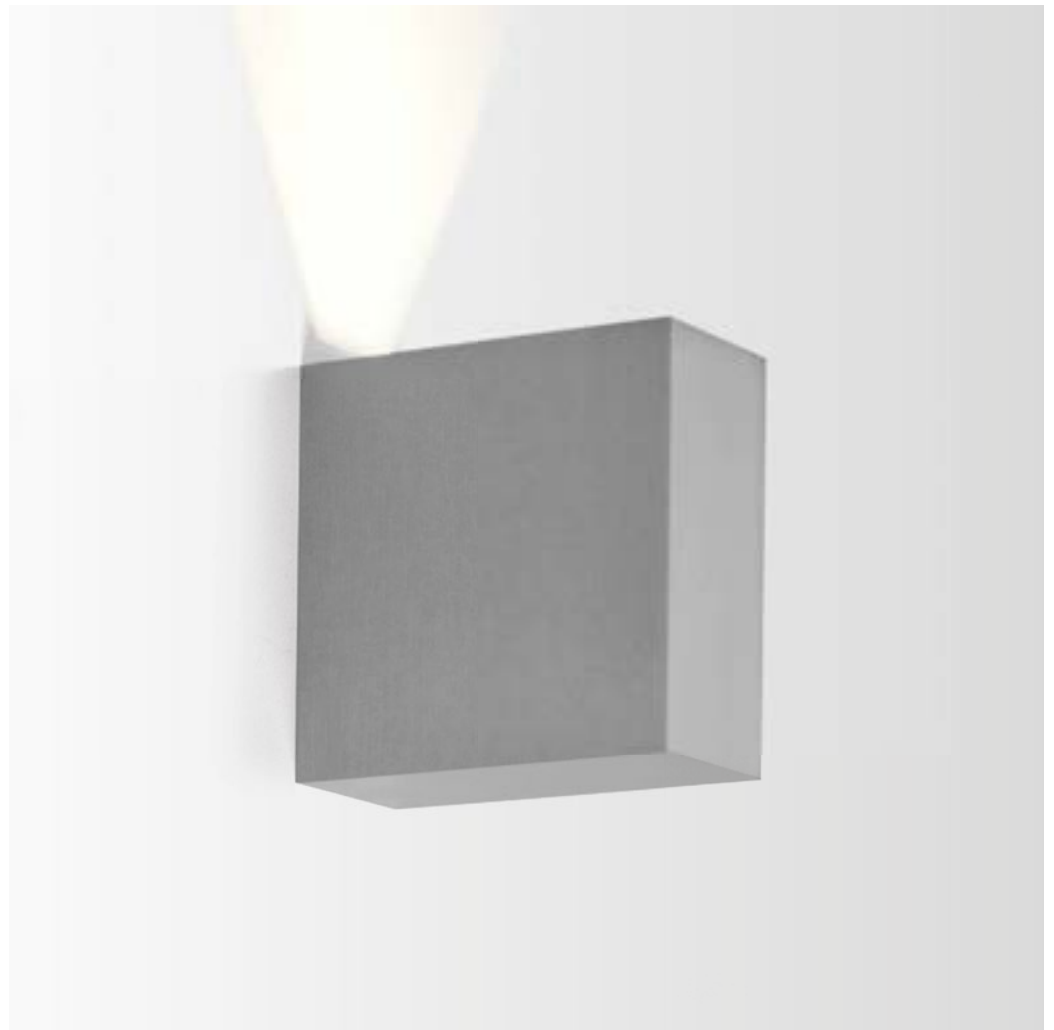





STATION





TRAIN

1.0

LED 6W | 220-240VAC | 50-60Hz
COB 2-step | incl. power supply


CE 0.24kg ⊕ 960° IP65 ⚡0,3 Ⓢ



2.0

2xLED 6W | 220-240VAC | 50-60Hz
COB 2-step | incl. power supply

CE 0.35kg ⊕ 960° IP65 ⚡0,3 Ⓢ



3000K | >80CRI | 420lm



719163W4



719163D4

3000K | >80CRI | 2x290lm



719263W4



719263D4








TAPE

1.0

LED 8W | 220-240VAC | 50-60Hz
COB 2-step | incl. PS | phase-cut dim

CE 0.73kg \oplus 960° IP65 \approx 0.3 \oplus



3000K | >80CRI | 480lm



722174W4



722174D4






BOX

1.0

LED 4W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim


CE 0.60kg ± 960° IP65 0,3 Ⓟ



2.0

2xLED 4W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim


CE 0.66kg ± 960° IP65 0,3 Ⓟ



3.0

LED 4W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim


CE 0.67kg ± 960° IP65 0,3 Ⓟ



4.0

2xLED 4W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim

CE 0.86kg ± 960° IP65 0,3 Ⓟ



3000K | >80CRI | 420lm



714164W4



714164D4



714164B4

3000K | >80CRI | 2x340lm



714144W4



714144D4



714144B4

3000K | >80CRI | 420lm



714264W4



714264D4



714264B4

3000K | >80CRI | 2x340lm



714244W4



714244D4



714244B4

OPTIONAL

flaps for adjustable beam angle



900401W0

OPTIONAL

flaps for adjustable beam angle



900401W0






1.0

LED 4W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim


CE 0.47kg ⊕ 960° IP65 ⚡0,3 Ⓛ



2.0

2xLED 4W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim


CE 0.47kg ⊕ 960° IP65 ⚡0,3 Ⓛ



3.0

LED 4W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim


CE 0.53kg ⊕ 960° IP65 ⚡0,3 Ⓛ



4.0

2xLED 4W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim

CE 0.53kg ⊕ 960° IP65 ⚡0,3 Ⓛ



3000K | >80CRI | 420lm



715164W4



715164D4



715164B4

3000K | >80CRI | 2x340lm



715144W4



715144D4



715144B4

3000K | >80CRI | 420lm



715264W4



715264D4



715264B4

3000K | >80CRI | 2x340lm



715244W4



715244D4



715244B4

OPTIONAL

flaps for adjustable beam angle



900401W0

OPTIONAL

flaps for adjustable beam angle



900401W0






BOXX

1.0

LED 2xLED 8W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim

CE 1.13kg \oplus 960° IP65 $\approx 0,3^\circ$ B



3000K | >80CRI | 2x680lm



730144W4



730144D4



730144B4

OPTIONAL

flaps for adjustable beam angle



900402W0






PALOS

1.0

LED 8W | 220-240VAC | 50-60Hz
COB 2-step | incl. PS | phase-cut dim

CE 1.55 kg \oplus 960° IP65 \approx 0,3 \odot



3000K | >80CRI | 480lm



716174W4



716174D4






PALOS

2.0

LED 2xLED 8W | 220-240VAC | 50-60Hz
COB 2-step | incl. PS | phase-cut dim

CE 1.86 kg \oplus 960° IP65 ≈ 0.3 \oplus



3000K | >80CRI | 2x480lm



716274W4



716274D4






X-BEAM

1.0

LED 12W | 220-240VAC | 50-60Hz
COB 2-step | incl. PS | phase-cut dim

CE 1.28 kg \oplus 960° IP65 \approx 0,3 \wedge 120°

   \curvearrowright 0-110°




2.0

LED 12W | 220-240VAC | 50-60Hz
COB 2-step | incl. PS | phase-cut dim

CE 1.28 kg \oplus 960° IP65 \approx 0,3 \odot \wedge 12°

   \curvearrowright 0-110°



3000K | >80CRI | 770lm



700264D4

3000K | >80CRI | 680lm



700254D4

ACCESSOIRES

snoot

90019005

ACCESSOIRES

snoot

90019005






BLOCK

1.0 HIT

HIT-CE 35/70W | G12
220-240VAC | 50-60Hz | EVG


CE 4.27kg ⊕ 960° IP55 ⚡0,7⚡ (T8)



1.0 QT-DE

QT-DE 12 R7s max. 80W | R7s
220-240VAC | 50-60Hz

CE 4.33kg ⊕ 960° IP55 ⚡0,7⚡ (T8)



HIT-CE 35W



7311Z7T0



7311Z7B0

HIT-CE 70W



7312Z7T0



7312Z7B0



7311R0T0








BLOCK

2.0 HIT

HIT-CE 35/70W | G12
220-240VAC | 50-60Hz | EVG


CE 4.51kg ⊕ 960° IP55 ⚡0,7 Ⓢ



2.0 QT-DE

QT-DE 12 R7s max. 80W | R7s
220-240VAC | 50-60Hz

CE 4.57kg ⊕ 960° IP55 ⚡0,7 Ⓢ



HIT-CE 35W



7313Z7T0



7313Z7B0

HIT-CE 70W



7314Z7T0



7314Z7B0

OPTIONAL cover line



911151T1



911151B1

OPTIONAL cover line



7313R0T0



911151T1






SCAPE

8.0

⇒ T16 14W | G5
220-240VAC | 50-60Hz | EVG


CE 2.37 kg ⊕ 960° IP67 $\approx 0,5$ P



11.0

⇒ T16 21W | G5
220-240VAC | 50-60Hz | EVG


CE 3.19 kg ⊕ 960° IP67 $\approx 0,5$ P



14.0

⇒ T16 28W | G5
220-240VAC | 50-60Hz | EVG

CE 4.15 kg ⊕ 960° IP67 $\approx 0,5$ P



7054T3T0



7055T3T0



7056T3T0





CARD

0.1

LED 1W | 350mA | 3Vf
PCB 3-step | excl. power supply

CE 0.05kg 960° IP67 0,3 10

20

60



0.2

LED 1W | 350mA | 3Vf
PCB 3-step | excl. power supply

CE 0.06kg 960° IP67 0,3 10

20

60




0.3

LED 1W | 350mA | 3Vf
PCB 3-step | excl. power supply

CE 0.06kg 960° IP67 0,3 10

20

60



3000K | >80CRI | 110lm



75016114

ALWAYS USE

power supply IP66
350mA | 3W

90213101

more power supplies on page 474

3000K | >80CRI | 110lm



75026114

ALWAYS USE

power supply IP66
350mA | 3W

90213101

more power supplies on page 474

3000K | >80CRI | 110lm



75036114

ALWAYS USE

power supply IP66
350mA | 3W

90213101

more power supplies on page 474







MAP

0.6

LED 2W | 220-240VAC | 50-60Hz
PCB 3-step | incl. power supply

CE 0.38 kg \oplus 960° IP67 $\approx 0,3$ TB Λ 38°



3000K | >80CRI | 150lm




75116314

0.9

LED 6W | 220-240VAC | 50-60Hz
COB 2-step | incl. PS | phase-cut dim

CE 0.70 kg \oplus 960° IP67 $\approx 0,3$ TB Λ 38°



3000K | >80CRI | 480lm




75126414

1.2

LED 9W | 220-240VAC | 50-60Hz
COB 2-step | incl. PS | phase-cut dim

CE 1.01 kg \oplus 960° IP67 $\approx 0,3$ TB



3000K | >80CRI | 480lm
beam angle 24°



75135414

beam angle 38°



75136414

OPTIONAL

recessed
housing

90012201

OPTIONAL

recessed
housing

90012202

OPTIONAL

recessed
housing

90012203







MAP



FLIP


1.2

LED 6W | 220-240VAC | 50-60Hz
COB 2-step | incl. PS | phase-cut dim

CE 1.06kg \oplus 960° IP67 $\approx 0,3$ TM A38°

\square \square \downarrow 110 \curvearrowright 15°/15°

\blacktriangledown \blacksquare \downarrow 160 \curvearrowright 360°



3000K | >80CRI | 480lm



75316414


1.6

LED 9W | 220-240VAC | 50-60Hz
COB 2-step | incl. PS | phase-cut dim

CE 1.72kg \oplus 960° IP67 $\approx 0,3$ TM

\square \square \downarrow 150 \curvearrowright 15°/15°

\blacktriangledown \blacksquare \downarrow 185 \curvearrowright 360°



3000K | >80CRI | 480lm
beam angle 24°



75325414

beam angle 38°



75326414

OPTIONAL

recessed
housing

90012203

OPTIONAL

recessed
housing

90012204





CHART


0.6

LED 2W | 220-240VAC | 50-60Hz
PCB 3-step | incl. power supply

CE 0.39 kg \oplus 960° IP67 \approx 0,3 \oplus \oplus Λ 38°

 \oplus 45

 \oplus 95



3000K | >80CRI | 150lm



75216314


0.9

LED 6W | 220-240VAC | 50-60Hz
COB 2-step | incl. PS | phase-cut dim

CE 0.70 kg \oplus 960° IP67 \approx 0,3 \oplus \oplus Λ 38°

 \oplus 78

 \oplus 125



3000K | >80CRI | 480lm



75226414


1.2

LED 9W | 220-240VAC | 50-60Hz
COB 2-step | incl. PS | phase-cut dim

CE 1.05 kg \oplus 960° IP67 \approx 0,3 \oplus \oplus

 \oplus 110

 \oplus 160



3000K | >80CRI | 480lm
beam angle 24°



75235414

beam angle 38°



75236414

OPTIONAL

recessed
housing

90012201

OPTIONAL

recessed
housing

90012202

OPTIONAL

recessed
housing

90012203






CHIP

1.2

LED 6W | 220-240VAC | 50-60Hz
COB 2-step | incl. PS | phase-cut dim

CE 1.10kg \oplus 960° IP67 $\approx 0,3$ TB $\Lambda 38^\circ$

110 15°/15°
 160 360°



3000K | >80CRI | 480lm


75416414

1.6

LED 9W | 220-240VAC | 50-60Hz
COB 2-step | incl. PS | phase-cut dim

CE 1.83kg \oplus 960° IP67 $\approx 0,3$ TB

150 15°/15°
 185 360°



3000K | >80CRI | 480lm
beam angle 24°

75425414

beam angle 38°

75426414

OPTIONAL

recessed housing **90012203**

OPTIONAL

recessed housing **90012204**





DRUM

1.0

LED 1,3W | 24VDC
excl. power supply


CE 1.18 kg 96° IP67 0,3+ TB



102x102



96



2.0

LED 8W | 24VDC
excl. power supply


CE 2.14 kg 96° IP67 0,3+ TB



202x202



96



3000K | >80CRI



755182X4

RGB



755282XR

4000K | >80CRI



755182X6

RGB



755182XR

OPTIONAL

recessed
housing

90012205

OPTIONAL

recessed
housing

90012206

PS/colour mixer
7W

90292301

PS/colour mixer
25W

90292701

more options on page 483

more options on page 483






FIFTY FIFTY

1.0

LED 8W | 220-240VAC | 50-60Hz
COB2-step | incl. PS | phase-cut dim

CE 1.2kg \oplus 960° IP65 $\approx 0,3$ $\text{\textcircled{B}}$




3000K | >80CRI | 480lm

756174D4

2.0

LED 8W | 220-240VAC | 50-60Hz
COB2-step | incl. PS | phase-cut dim

CE 0.98kg \oplus 960° IP65 $\approx 0,3$ $\text{\textcircled{B}}$



3000K | >80CRI | 480lm

756274D4

ALWAYS USE

base 300 **910013D0**

base 400 **910014D0**

base 800 **910018D0**

base 1000 **910010D0**

OPTIONAL

concrete ground
fixation **90013301**





A photograph of a garden at night. A paved path with drainage grates runs along the left side. The garden is filled with various plants, including large-leafed tropical plants in the foreground and dense foliage in the background. Two modern, cylindrical light fixtures are visible, one on the left and one on the right, both emitting a soft glow. The overall scene is dark, with the lights providing the primary illumination.

**FIFTY
FIFTY**




SMILE

1.0

LED 8W | 220-240VAC | 50-60Hz
COB2-step | incl. PS | phase-cut dim

CE 1.15 kg \oplus 960° IP65 $\approx 0,3$ B



3000K | >80CRI | 480lm




703554D4

2.0

LED 8W | 220-240VAC | 50-60Hz
COB2-step | incl. PS | phase-cut dim

CE 0.95 kg \oplus 960° IP65 $\approx 0,3$ B



3000K | >80CRI | 480lm



703654D4

ALWAYS USE

base 300 **910013D0**

base 400 **910014D0**

base 800 **910018D0**

base 1000 **910010D0**

OPTIONAL

concrete ground
fixation **90013301**






SWAY

1.0

LED 8W | 220-240VAC | 50-60Hz
COB 2-step | incl. PS | phase-cut dim

CE 1.01kg ⊕ 960° IP54 0.34 ⑥

140°/140°



3000K | >80CRI | 480lm


720174D4

2.0

2xLED 8W | 220-240VAC | 50-60Hz
COB 2-step | incl. PS | phase-cut dim

CE 1.10kg ⊕ 960° IP54 0.34 ⑥

140°/140°



3000K | >80CRI | 2x480lm

720274D4

ALWAYS USE

base 300 **910013D0**

base 400 **910014D0**

base 800 **910018D0**

base 1000 **910010D0**

OPTIONAL

concrete ground
fixation **90013301**



EXTERIOR | FLOOR SURFACE




PALOS

1.0

LED 8W | 220-240VAC | 50-60Hz
COB2-step | incl. PS | phase-cut dim

CE 1.4kg | 960° | IP65 | 0,3 | B



3000K | >80CRI | 480lm



716374D4

ALWAYS USE

base 300 **910013D0**

base 400 **910014D0**

base 800 **910018D0**

base 1000 **910010D0**

OPTIONAL

concrete ground
fixation **90013301**






PALOS

2.0

2xLED 8W | 220-240VAC | 50-60Hz
COB 2-step | incl. PS | phase-cut dim

CE 1.65kg \oplus 960° IP65 \approx 0,3 m^2



3000K | >80CRI | 2x480lm



716474D4

ALWAYS USE

base 300 **910013D0**

base 400 **910014D0**

base 800 **910018D0**

base 1000 **910010D0**

OPTIONAL

concrete ground
fixation **90013301**



EXTERIOR | FLOOR SURFACE




EDGE

2.0

LED 8W | 220-240VAC | 50-60Hz
COB2-step | incl. PS | phase-cut dim

CE 2.41kg \oplus 960° IP65 \approx 0,3 $\text{\textcircled{B}}$



3000K | >80CRI | 480lm




721174D4

4.0

LED 8W | 220-240VAC | 50-60Hz
COB2-step | incl. PS | phase-cut dim

CE 3.34kg \oplus 960° IP65 \approx 0,3 $\text{\textcircled{B}}$



3000K | >80CRI | 480lm




721274D4

8.0

LED 8W | 220-240VAC | 50-60Hz
COB2-step | incl. PS | phase-cut dim

CE 5.6kg \oplus 960° IP65 \approx 0,3 $\text{\textcircled{B}}$



3000K | >80CRI | 480lm



721374D4






TAPE

4.0

LED 8W | 220-240VAC | 50-60Hz
COB 2-step | incl. PS | phase-cut dim

CE 1.92 kg \oplus 960° IP65 $\approx 0,3$ \oplus



3000K | >80CRI | 480lm



722274W4




722274D4

6.0

LED 8W | 220-240VAC | 50-60Hz
COB 2-step | incl. PS | phase-cut dim

CE 2.6 kg \oplus 960° IP65 $\approx 0,3$ \oplus



3000K | >80CRI | 480lm



722374W4




722374D4

8.0

LED 8W | 220-240VAC | 50-60Hz
COB 2-step | incl. PS | phase-cut dim

CE 3.1 kg \oplus 960° IP65 $\approx 0,3$ \oplus



3000K | >80CRI | 480lm



722474W4



722474D4

OPTIONAL
groundspike

90013102

OPTIONAL
groundspike

90013102

OPTIONAL
groundspike

90013102






PACE

4.0

LED 8W | 220-240VAC | 50-60Hz
COB 2-step | incl. PS | phase-cut dim

CE 1kg | 960° | IP65 | $\approx 0,3\%$ | B



3000K | >80CRI | 480lm



723174W4




723174D4

6.0

LED 8W | 220-240VAC | 50-60Hz
COB 2-step | incl. PS | phase-cut dim

CE 1.33kg | 960° | IP65 | $\approx 0,3\%$ | B



3000K | >80CRI | 480lm



723274W4




723274D4

8.0

LED 8W | 220-240VAC | 50-60Hz
COB 2-step | incl. PS | phase-cut dim

CE 1.61kg | 960° | IP65 | $\approx 0,3\%$ | B



3000K | >80CRI | 480lm



723374W4



723374D4

OPTIONAL
groundspike

90013102

OPTIONAL
groundspike

90013102

OPTIONAL
groundspike

90013102






LINUS

1.0

LED 8W | 220-240VAC | 50-60Hz
COB 2-step | incl. PS | phase-cut dim

CE 1.6kg ⊕ 960° IP65 ⚡0,3⚡ Ⓟ



3000K | >80CRI | 480lm




726174D4

2.0

LED 8W | 220-240VAC | 50-60Hz
COB 2-step | incl. PS | phase-cut dim

CE 1.6kg ⊕ 960° IP65 ⚡0,3⚡ Ⓟ



3000K | >80CRI | 480lm | opal glass



726274D4

ALWAYS USE

base 400 **910024D0**

base 600 **910026D0**

base 800 **910028D0**

OPTIONAL

ground spike **90013103**

ground fixation **90013302**



EXTERIOR | FLOOR SURFACE




GETTON

1.0

LED 8W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim

CE 0.8kg \oplus 960° IP65 $\approx 0,3$ \oplus



3000K | >80CRI | 665lm | opal glass




717574D4

2.0

LED 8W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim

CE 0.8kg \oplus 960° IP65 $\approx 0,3$ \oplus



3000K | >80CRI | 720lm | clear glass



717674D4

ALWAYS USE


base 400 910052D0

base 600 910054D0

base 800 910058D0

OPTIONAL

groundspike 90013101

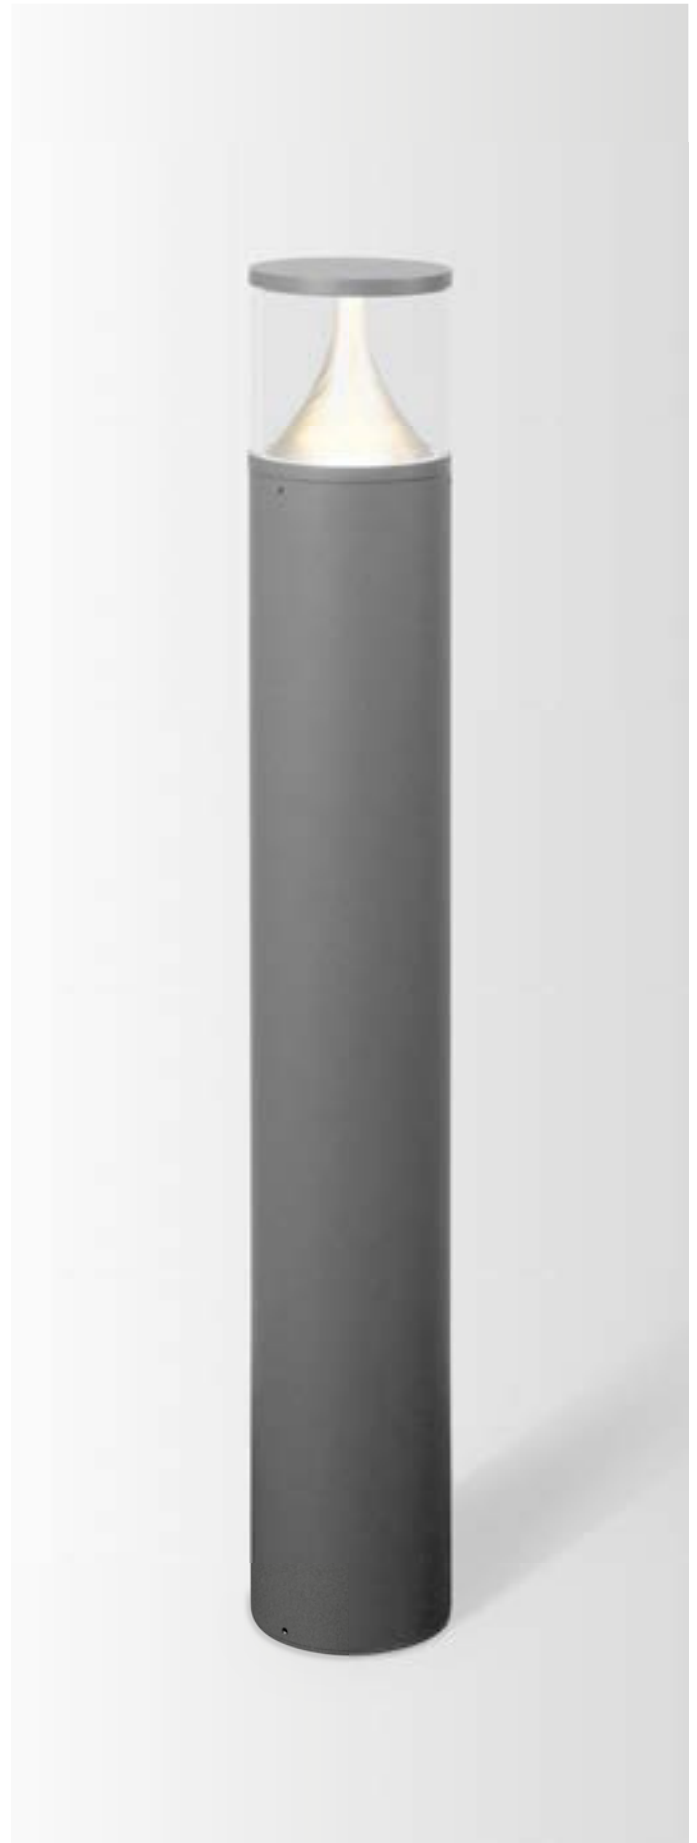




PALLUZ O

1.0

LED 8W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim

CE 2.29kg \oplus 960° IP65 $\approx 0,3$ P




3000K | >85CRI | 665lm | opal glass

724174D4

2.0

LED 8W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim

CE 2.29kg \oplus 960° IP65 $\approx 0,3$ P



3000K | >85CRI | 720lm | clear glass

724274D4

ALWAYS USE

base 230 910033D0

base 600 910036D0

base 800 910038D0

invisible fixation

base 230 910032D0

OPTIONAL

ground spike for invisible base

230 90013104

ground fixation for base

230 | 600 | 800 90013303






PALLUZ C

1.0

LED 8W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim

CE 1.3kg ⊕ 960° IP65 ⚡0,3⚡ Ⓟ




3000K | >85CRI | 665lm | opal glass

724374D4

2.0

LED 8W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim

CE 1.3kg ⊕ 960° IP65 ⚡0,3⚡ Ⓟ



3000K | >85CRI | 720lm | clear glass

724474D4

ALWAYS USE

base 230 910033D0

base 600 910036D0

base 800 910038D0

invisible fixation

base 230 910032D0


OPTIONAL

ground spike for invisible base

230 90013104

ground fixation for base

230 | 600 | 800 90013303

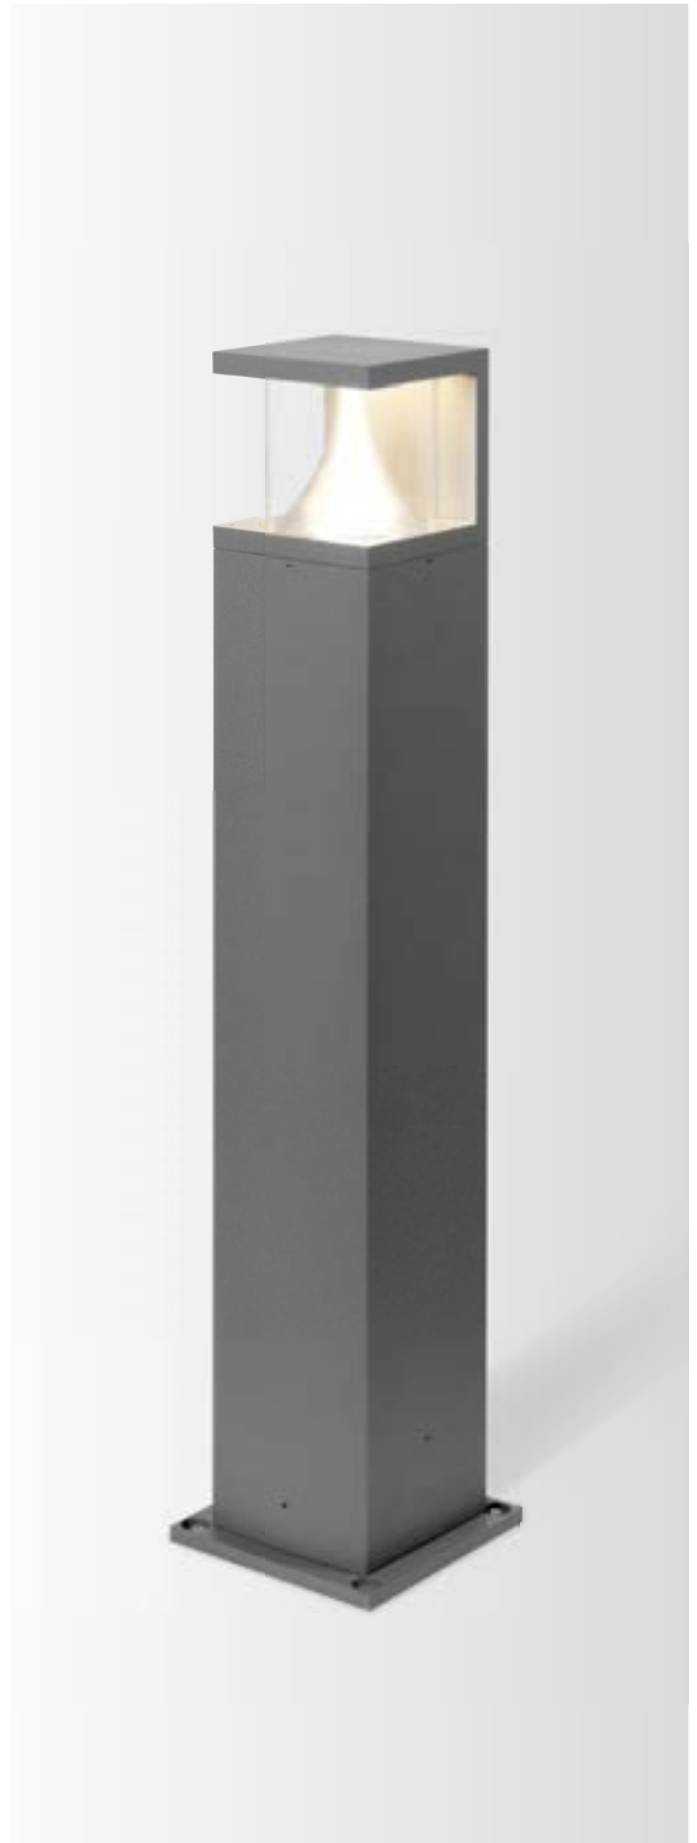




POLAR

1.0

⇒ T16 21W | G5
220-240VAC | 50-60Hz | EVG

CE 5.22kg ⊕ 960° IP55 0.5 Ⓟ




7251T7W0



7251T7T0



7251T7B0

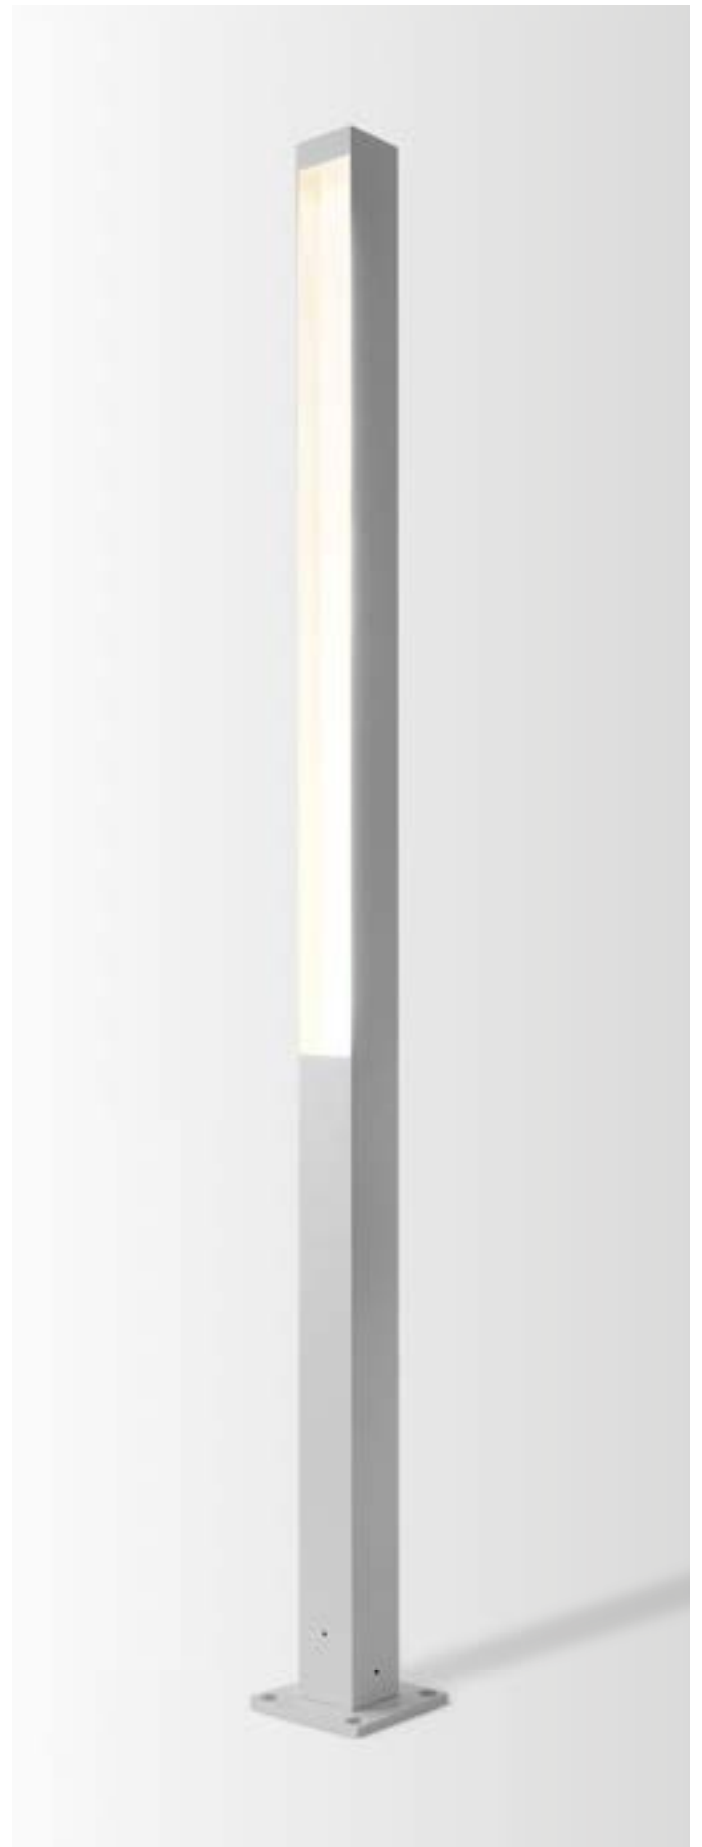




SCAPE

7.0

⇒ T16 14W | G5
220-240VAC | 50-60Hz | EVG

CE 3.14 kg ⊕ 960° IP55 ⚡0.5 Ⓟ




7057T3T0

10.0

⇒ T16 21W | G5
220-240VAC | 50-60Hz | EVG

CE 4.26 kg ⊕ 960° IP55 ⚡0.5 Ⓟ




7058T3T0

13.0

⇒ T16 28W | G5
220-240VAC | 50-60Hz | EVG

CE 5.16 kg ⊕ 960° IP55 ⚡0.5 Ⓟ



7059T3T0

OPTIONAL
groundspike

90013105

OPTIONAL
groundspike

90013105

OPTIONAL
groundspike

90013105






STAKE

1.0

LED 8W | 220-240VAC | 50-60Hz
COB 2-step | incl. PS | phase-cut dim

CE 0.55kg ⊕ 960° IP54 $\approx 0,3$ \oplus

  0-120°



3000K | >80CRI | 480lm | 1m cable




727174D4

2.0

LED 8W | 220-240VAC | 50-60Hz
COB 2-step | incl. PS | phase-cut dim

CE 0.50kg ⊕ 960° IP54 $\approx 0,3$ \oplus


  0-120°



3000K | >80CRI | 480lm



727374D4



OPTIONAL

groundspike **90013106**

snoot **90019004**

ALWAYS USE

base 200 **910042D0**

base 400 **910044D0**

OPTIONAL

groundspike **90013107**

snoot **90019004**






STAKE FOLD

1.0

LED 8W | 220-240VAC | 50-60Hz
COB 2-step | incl. PS | phase-cut dim

CE 0.78kg \oplus 960° IP54 $\approx 0,3$ \oplus

   0-90°




3000K | >80CRI | 480lm

727274D4

ACCESSOIRES

snoot

90019004








X-BEAM

1.0

LED 12W | 220-240VAC | 50-60Hz
COB 2-step | incl. PS | phase-cut dim

CE 1.28 kg \ominus 960° IP65 \approx 0,3 \oplus Λ 120°

 0-110°



3000K | >80CRI | 770lm




700264D4

2.0

LED 12W | 220-240VAC | 50-60Hz
PCB 3-step | incl. PS | phase-cut dim

CE 1.28 kg \ominus 960° IP65 \approx 0,3 \oplus Λ 12°

 0-110°



3000K | >80CRI | 680lm



700254D4

ACCESSOIRES

snoot **90019005**

groundspike **90013106**

ACCESSOIRES

snoot **90019005**

groundspike **90013106**








X-BEAM


1.0

QR111 max. 75W | G53
220-240VAC | 50-60Hz | TE

CE 1.28 kg \oplus 960° IP65 \approx 0,3 \oplus

   0-110°

   355°



 **700338T0**

ACCESSOIRES
groundspike **90013108**






1.0

LED 16W | 220-240VAC | 50-60Hz
PCB 3-step | incl. power supply

CE 2.4kg ⊕ 960° IP65 $\approx 0,3$ P



3000K | >80CRI




728183D4

2.0

LED 25W | 220-240VAC | 50-60Hz
PCB 3-step | incl. power supply

CE 6.3kg ⊕ 960° IP65 $\approx 0,3$ P



3000K | >80CRI



728283D4

OPTIONAL
groundspike

90013109

horizontal
spike

90013110

horizontal
with screws

90019008

OPTIONAL
groundspike

90013109

horizontal
spike

90013111

horizontal
with screws

90019009





J.M.






ALICE

1.0

LED 5W | 100-240VAC | 50-60Hz
COB 3-step | incl. power supply

CE 2.7kg ⊕ 960° IP67 $\approx 0,3\text{d}$



3000K | >85CRI




729153D4

2.0

LED 5W | 100-240VAC | 50-60Hz
COB 3-step | incl. power supply

CE 6kg ⊕ 960° IP67 $\approx 0,3\text{d}$



3000K | >85CRI



729253D4

OPTIONAL
groundspike

90013112

OPTIONAL
groundspike

90013113



POWER SUPPLIES

350mA 4W

Driver 100-240VAC | 50-60Hz
4W | 350mA | 4-12V
L/W/H 43x42x23

CE 0.05kg   TÜV IP20

EYE 1W
STRIPE 1W
SMILE IN 1W

90213201

350mA 6W

Driver 90-264VAC | 50-60Hz
6W | 350mA | 3-22V
L/W/H 64x35x21

CE 0.04kg    SELV IP20

LITO 2W
PEEK 0.6 4,5W
SEEK 4,5W
SEEK GAP 4,5W

90213202

350mA 10W

Driver 220-240VAC | 50-60Hz
10W | 350mA | 13-29V
L/W/H 102x51x30

CE 0.05kg   SELV IP20

DEEP 7W
RON 7W
RONY 7W

90213402

350mA 20W

Driver 220-240VAC | 50-60Hz
20W | 350mA | 26-57V
L/W/H 102x51x29,5

CE 0.08kg   SELV IP20

DEEP 7W (2x)
PEEK 0.8 7W (2x)
RON 7W (2x)
RONY 7W (2x)
SEEK 4,5W (2x)

90213601

500mA 6W

Driver 90-264VAC | 50-60Hz
6W | 500mA | 3-12V
L/W/H 64x35x21

CE 0.04kg   EMC IP20

THEMIS 5W
STRANGE 5W
LITO 3W

90214201

500mA 10W

Driver 220-240VAC | 50-60Hz
10W | 500mA | 9-20V
L/W/H 102x51x30

CE 0.06kg   SELV IP20

DEEP 10W
RON 10W | **RONY** 10W
LUNA 6W
THEMIS 5W
STRANGE 5W
PEEK 0.6 6W
SEEK 6W | **SEEK GAP** 6W

90214403

500mA 35W

Driver 220-240VAC | 50-60Hz
35W | 500mA | 35-70V
L/W/H 159x82x34

CE 0.19kg   SELV IP20

DEEP 10W (3x)
RON 10W (3x)
RONY 10W (3x)

90214801

500mA 15W DIM

Driver 220-240VAC | 50-60Hz | 5% - 100%
15W | 500mA | 30V | phase-cut dim
L/W/H 102x51x30

CE 0.08kg   SELV IP20

DEEP 10W
RON 10W
RONY 10W
NOTE 1.2

90224501

500mA 20W

Driver 220-240VAC | 50-60Hz
20W | 500mA | 18-40V
L/W/H 102x51x29,5

CE 0.08kg   SELV IP20

DEEP 10W (1-2x)
RON 10W (1-2x)
RONY 10W (1-2x)

90214601

500mA 20W DALI

Driver 220-240VAC | 50-60Hz | 20W | 500mA
9-42,5V | 1%-100% | DSI | switchdim | dali
L/W/H 207x42x31

CE 0.17kg   SELV IP20

RON (1-2x)
RONY (1-2x)
DEEP (1-2x)

90254601

700mA 4W

Driver 100-240VAC | 50-60Hz
4W | 700mA | 2,5-6V
L/W/H 43x42x24

CE 0.05kg  TÜV IP20

EYE 2W
STRIPE 2W
SMILE IN 2W

90215201

700mA 10W

Driver 220-240VAC | 50-60Hz
10W | 700mA | 6,5-14,5V
L/W/H 102x51x30

CE 0.06kg   SELV IP20

LUNA 8W
THEMIS 8W
STRANGE 8W

90215403

700mA 10W DIM

Driver 220-240VAC | 50-60Hz | 10%-100%
10W | 700mA | 7,5-14V | phase-cut dim
L/W/H 93x53x25

CE 0.09kg    IP20

LUNA 8W
THEMIS 8W
STRANGE 8W

90225401

700mA 12W

Driver 220-240VAC | 50-60Hz
12W | 700mA | 12-15V
L/W/H 121x45x20

CE 0.09kg  SELV IP20

included in **CORO 1.6 SURFACE**

90215404

700mA 14W DIM

Driver 220-240VAC | 50-60Hz | 5% - 100%
700mA | 10-20V | 14W | phase-cut dim
L/W/H 102x51x30

CE 0.07kg   SELV IP20

included in **CORO 1.3 RECESSED,**
CORO 1.6 RECESSED, CORY 1.6
RECESSED, CORY 2.1 RECESSED

90225501

700mA 20W DIM

Driver 180-264VAC | 50-60Hz
20W | 700mA | 15-28V | phase-cut dim
L/W/H 138x50x23

CE 0.15kg   EMC IP20

included in **CORO 2.0 SURFACE,**
CORO 2.5 SURFACE, CORY 2.6
SURFACE, CORY 3.4 SURFACE

90225601

700mA 25W DIM

Driver 220-240VAC | 50-60Hz
25W | 700mA | 16-35V | phase-cut dim
L/W/H 145x51x30

CE 0.12kg  SELV IP20

included in **CORO 2.0 RECESSED**,
CORO 2.5 RECESSED

90225701

350mA 3W IP66

Driver 90-264VAC | 50-60Hz
3W | 350mA | 3-15V
L/W/H 52x30x23

CE 0.05kg   EMC IP66

ORIS 0.7 1W
ORIS 1.3 2W
ORIS 2.0 2W
SMILE IN EXTERIOR
CARD

90213101

350mA 7W IP67

Driver 90-295VAC | 47-63Hz
7W | 350mA | 10-20V
L/W/H 57x41x24

CE 0.05kg  SELV IP67

NOTE 0.9 4,5W
NOTE 1.2 7W

90213301

350mA 18W IP67

Driver 120-240VAC | 50-60Hz | 18W
350mA | 4-52V | dim trailing edge
L/W/H 133x40x30

CE 0.28kg   SELV IP67

90223602

500mA 7W IP67

Driver 90-295VAC | 47-63Hz
7W | 500mA | 5-14,5V
L/W/H 57x41x24

CE 0.15kg  SELV IP67

NOTE 0.9 6W

90214301

500mA 12W IP67

Driver 120-240VAC | 50-60Hz
12W | 500mA | 2-26V
L/W/H 81x40x23

CE 0.15kg  SELV IP67

NOTE 1.2 10W

90214402

700mA 3W IP66

Driver 90-264VAC | 50-60Hz
3W | 700mA | 3-6V
L/W/H 52x30x23

CE 0.09kg   EMC IP66

ORIS 0.7 2W
SMILE IN EXTERIOR

90215101

700mA 6W IP67

Driver 120-240VAC | 50-60Hz
6W | 700mA | 2-10V
L/W/H 45x45x25

CE 0.05kg   IP67

ORIS 1.3 4W
ORIS 2.0 4W

90215202

700mA 12W IP67

Driver 120-240VAC | 50-60Hz
12W | 700mA | 2-18V
L/W/H 81x40x23

CE 0.28kg  SELV IP67

90215402

700mA 18W IP67

Driver 120-240VAC | 50-60Hz | 18W
700mA | 4-26V | dim trailing edge
L/W/H 133x40x30


CE 0.28kg   SELV IP67

90225602

SA EVG 35W

electronic ballast
220-240VAC | 50-60Hz
L/W/H 150x80x35

CE 0.22kg  IP20




90219901

SA EVG 70W

electronic ballast
220-240VAC | 50-60Hz
L/W/H 150x80x35


CE 0.24kg  IP20



90219902

TRANSFORMER 12V/105W

230-240VAC | 50-60Hz | 35-105VA
DIM leading | trailing edge
L/W/H 141x40x29

CE 0.12kg  IP20

90221903

TRANSFORMER 12V/60W

230-240VAC | 50-60Hz | 20-60VA
DIM leading | trailing edge
L/W/H 120x40x29

CE 0.10kg  IP20

90221902

LED LAMPS

PAR16 LED 2700K

PAR16 LED | GU10 | 175-250VAC | 50-60Hz
2700K | 6W | >80 CRI | 390lm
phase-cut dim

CE 0.06kg IP20 Λ 45°



901228W2

PAR16 LED 3000K

PAR16 LED | GU10 | 175-250VAC | 50-60Hz
3000K | 6W | >80 CRI | 410lm
phase-cut dim

CE 0.06kg IP20 Λ 45°



901228W4

PAR16 LED 4000K

PAR16 LED | GU10 | 175-250VAC | 50-60Hz
4000K | 6W | >80 CRI | 450lm
phase-cut dim

CE 0.06kg IP20 Λ 45°



901228W6

PAR16 LED AMBIENT

PAR16 LED | GU10 | 175-250VAC | 50-60Hz
1800-3000K | 7W | >95 CRI | 390lm
ambient white phase-cut dim

CE 0.06kg IP20 Λ 40°



901229S9

QT14 LED 3000K

QT14 LED | G9 | 175-250VAC | 50-60Hz
3000K | 3W | >80 CRI | 300lm

CE 0.05kg IP20



9019G704

TCR LED 3000K

TCR LED | GX53 | 175-264VAC | 50-60Hz
3000K | 6W | >80 CRI | 450lm

CE 0.12kg IP20



901348W4

ES111 LED 2700K

ES111 LED | GU10 | 110-240VAC | 50-60Hz
2700K | 13W | >80 CRI | 530lm
phase-cut dim

CE 0.26kg ROHS IP20 Λ 24°



901528S2

ES111 LED 3000K

ES111 LED | GU10 | 110-240VAC | 50-60Hz
3000K | 13W | >80 CRI | 530lm
phase-cut dim

CE 0.26kg ROHS IP20 Λ 24°



901528S4

T45 LED 2200K

T45 LED | E27 | 220-240VAC | 50-60Hz
2200K | 4W | >90 CRI | 300lm

BISHOP
WIRO 1.8 | 2.0 | 3.8 | 6.1 | 6.5




9003E116

C35 LED 2700K

C35 LED | E14 | 220-240VAC | 50-60Hz
2700K | 2W | >85 CRI | 200lm

OCTONOM



9019C805

QA60 LED 2200K

QA60 LED | E27 | 220-240VAC | 50-60Hz
2200K | 6W | >90 CRI | 400lm

BISHOP
J.J.W. 01 | 02 | 03 | 04 | 05
WIRO 1.8 | 2.0 | 3.8 | 6.1 | 6.5



9003E109

QA60 LED 2700K

QA60 LED | E27 | 220-240VAC | 50-60Hz
2700K | 6W | >90 CRI | 550lm

BISHOP
J.J.W. 01 | 02 | 03 | 04 | 05
WIRO 1.8 | 2.0 | 3.8 | 6.1 | 6.5




9003E108

G95 LED 2200K

G95 LED | E27 | 220-240VAC | 50-60Hz
2200K | 6W | >90 CRI | 400lm

BISHOP
WIRO 6.1 | 6.5




9003E111

G125 LED 2200K

G125 LED | E27 | 220-240VAC | 50-60Hz
2200K | 6W | >90 CRI | 400lm

BISHOP
WIRO 6.1 | 6.5




9003E112

ST64 LED 2200K

ST64 LED | E27 | 220-240VAC | 50-60Hz
2200K | 6W | >90 CRI | 400lm

BISHOP
WIRO 1.8 | 3.8 | 6.1 | 6.5



9003E110

DECO LAMPS

QA60 LAMP 2200K

QA60 CARBON FILAMENT | E27
2200K | 15W | 220-240VAC | 50lm
phase-cut dim

WIRO 1.8 | 2.0 | 3.8 | 6.1 | 6.5




9003E101

G95 LAMP 2200K

G95 CARBON FILAMENT | E27
2200K | 15W | 220-240VAC | 50lm
phase-cut dim

WIRO 6.1 | 6.5




9003E102

G125 LAMP 2200K

G125 CARBON FILAMENT | E27
2200K | 15W | 220-240VAC | 50lm
phase-cut dim

WIRO 6.1 | 6.5



9003E103

T45-S LAMP 2200K

T45 CARBON FILAMENT | E27
2200K | 15W | 220-240VAC | 50lm
phase-cut dim

WIRO 1.8 | 2.0 | 3.8 | 6.1 | 6.5



9003E104

ST64 LAMP 2200K

ST64 CARBON FILAMENT | E27
2200K | 15W | 220-240VAC | 50lm
phase-cut dim

WIRO 1.8 | 3.8 | 6.1 | 6.5



9003E105

T32-180 LAMP 2200K

T32-180 CARBON FILAMENT | E27
2200K | 15W | 220-240VAC | 50lm
phase-cut dim

WIRO 1.8 | 3.8 | 6.1 | 6.5




9003E106

T32-300 LAMP 2200K

T32-300 CARBON FILAMENT | E27
2200K | 15W | 220-240VAC | 50lm
phase-cut dim

WIRO 6.1 | 6.5




9003E107

PLASTER KITS

LUNA 1.0

plaster kit

140x100 115



90017101

LUNA 2.0

plaster kit

140x100 115




90017102

LITO

plaster kit

126x90 45




90017103

SEEK 1.0

plaster kit

98x98 120




90017107

SEEK 2.0

plaster kit

180x98 120




90017108

SEEK 3.0

plaster kit

262x98 120



90017109

PLANO 1.0


plaster kit



90017104

PLANO 2.0


plaster kit



90017105

PLANO 111

plaster kit



90017106

THEMIS CARRÉ 0.8

plaster kit



90017110

THEMIS CARRÉ 1.7


plaster kit



90017111

THEMIS CARRÉ 2.7


plaster kit



90017112

THEMIS 1.7


plaster kit



90017113

THEMIS 2.7

plaster kit



90017114

THEMIS 5.0


plaster kit



90017115

STRANGE 1.0


plaster kit



90017116

STRANGE 2.0



plaster kit



90017117

STRANGE 1.0 111



plaster kit



90017118

ORIS 0.7



plaster kit | recessed housing



90012039

ORIS 1.3



plaster kit | recessed housing



90012041

ORIS 2.0

plaster kit | recessed housing



90012043

STRIPE 0.4 | 0.7



plaster kit | recessed housing



90012037

STRIPE 2.2

plaster kit | recessed housing




90012038

RECESSED HOUSING

LUNA

recessed housing
always use in combination with
plasterkit

130x160 122




90012026

LITO

recessed housing
always use in combination with
plasterkit

130x140 115



90012027

SMILE IN

recessed housing

91 55




90012030

THEMIS CARRÉ 0.8

recessed housing
always use in combination with
plasterkit

182x160 85




90012031

THEMIS CARRÉ 1.7

recessed housing
always use in combination with
plasterkit

182x160 85




90012032

THEMIS CARRÉ 2.7

recessed housing
always use in combination with
plasterkit

372x250 85




90012033

THEMIS 1.7

recessed housing
always use in combination with
plasterkit

272x160 85




90012034

THEMIS 2.7

recessed housing
always use in combination with
plasterkit

372x160 85




90012035

THEMIS 5.0

recessed housing
always use in combination with
plasterkit

572x160 85




90012036

MAP 0.6/CHART 0.6

recessed housing

137 110




90012201

MAP 0.9/CHART 0.9

recessed housing

137 130




90012202

MAP 1.2/CHART 1.2

recessed housing

190 158




90012203

FLIP 1.2/CHIP 1.2

recessed housing

190 158




90012203

FLIP 1.6/CHIP 1.6

recessed housing


220 184



90012204

EYE


recessed housing



9001205

DRUM 1.0


recessed housing



90012205

DRUM 2.0


recessed housing



90012206

ORIS 0.7


concrete housing



90012044

ORIS 1.3


concrete housing



90012040

ORIS 2.0


concrete housing



90012042

HIDE SMALL 1 LAMP

recessed housing+plaster kit




90012009

90012017

HIDE SMALL 2 LAMPS

recessed housing+plaster kit




90012010

90012018

HIDE SMALL 3 LAMPS

recessed housing+plaster kit




90012011

90012019

HIDE SMALL 4 LAMPS

recessed housing+plaster kit




90012012

90012020

HIDE BIG 1 LAMP

recessed housing+plaster kit




90012013

90012021

HIDE BIG 2 LAMPS

recessed housing+plaster kit




90012014

90012022

HIDE BIG 3 LAMPS

recessed housing+plaster kit




90012015

90012023

HIDE BIG 4 LAMPS

recessed housing+plaster kit




90012016

90012024

ACCESSOIRES


TRACK PROFILE 1M

1-phase




TRACK PROFILE 2M

1-phase



TRACK PROFILE 3M

1-phase




END FEED

left



END FEED

right




CONNECTOR

straight




L-CONNECTOR

left




L-CONNECTOR

right




END CAP




GETTON

big cover




BLOCK

cover line




ATIM

louvre long




ATIM

louvre carré




STAKE

snoot



X-BEAM

snoot



HYDRO

colour filter set
red/blue/green



90016101

KNOB

colour filter set
red/blue/green



90016102

SKÖLL 1.0

colour filter set
red/blue/green



90016103

SKÖLL 2.0

colour filter set
red/blue/green




90016104

DRUM 7W

power supply/colour mixer

L/W/H 59x89x49

⊕ 0.12kg □ IP20




90292301

DRUM 25W

power supply/colour mixer

L/W/H 104x222x70

⊕ 1.85kg □ IP20




90292701

DRUM 60W

power supply/colour mixer

L/W/H 104x222x70


⊕ 2.34kg □ IP20



90292901

CORK

bottle 1



90019013

CORK

bottle 2



90019014

BOX


flaps for adjustable beam angle



900401W0

BOXX

flaps for adjustable beam angle



900402W0

BASE

BASE 300


fifty fifty | smile | sway | palos



910013D0

BASE 400

fifty fifty | smile | sway | palos



910014D0

BASE 800


fifty fifty | smile | sway | palos



910018D0

BASE 1000

fifty fifty | smile | sway | palos



910010D0


PALLUZ 230

invisible fixation base




910032D0

PALLUZ 230




910033D0

PALLUZ 600




910036D0

PALLUZ 800




910038D0

LINUS 400



910024D0

LINUS 600




910026D0

LINUS 800




910028D0

STAKE POLE 200




910042D0

STAKE POLE 400




910044D0

GETTON 400



910052D0

GETTON 600



910054D0

GETTON 800




910058D0

GROUND FIXATION

CONCRETE FIXATION


fifty fifty | smile | sway | palos



90013301

TAPE | PACE

ground spike



90013102

GETTON POLE


ground spike



90013101

LINUS


ground spike



90013103

LINUS


ground fixation



90013302

PALLUZ


ground fixation



90013303

PALLUZ


ground spike
only for invisible fixation base 230



90013104

SCAPE


ground spike



90013105

STAKE | X-BEAM LED


ground spike



90013106

STAKE POLE


ground spike



90013107

X-BEAM QR111

ground spike




90013108

GROUND FIXATION

J.M. SMALL | MEDIUM


ground spike



90013109

J.M. SMALL


horizontal spike



90013110

J.M. MEDIUM

horizontal spike



90013111

J.M. SMALL


horizontal with screws



90019008

J.M. MEDIUM


horizontal with screws



90019009

ALICE SMALL


ground spike



90013112

ALICE MEDIUM

ground spike




90013113

UNO ACCESSORIES

UNO


channel 90°
304mm



90014114

UNO


channel 90°
598mm



90014115

UNO


channel 90°
892mm



90014116

UNO


channel 90°
3000mm



90014117

UNO


channel 60°
304mm



90014110

UNO


channel 60°
598mm



90014111

UNO


channel 60°
892mm



90014112

UNO

channel 60°
3000mm



90014113

UNO

end cap 60°

90019015

UNO

end cap 90°

90019016

UNO


mounting tape

90019010

UNO


connection 1.8

90019011



UNO

feeder cable 3.0



90019012

24VDC 12W

Driver 220-240VAC | 50-60Hz
incl. 2m power cable | 3m feeder cable
L/W/H 121x45x16

CE 0.09kg IP20

UNO 0.3 4W
UNO 0.6 8W
UNO 0.9 12W

90212401

24VDC 24W

Driver 220-240VAC | 50-60Hz
incl. 2m power cable | 3m feeder cable
L/W/H 151x41x30

CE 0.17kg IP20


UNO 0.6 8W (3x)
UNO 0.9 12W (2x)

90212701

24VDC 100W

Driver 110-240VAC | 50-60Hz
L/W/H 180x100x45

CE 0.59kg IP20



90212901

INDEX ON PRODUCT NAMES

<i>PRODUCT NAME</i>	<i>PAGE</i>
ALICE 1.0	473
ALICE 2.0	473
ARZY 2.0	307
ATIM 1.0 LED	365
ATIM 1.0 TC-S	365
ATIM CARRÉ 2.0 TCR	367
ATIM CARRÉ 2.0 LED	367
BEBOW 1.0 CEILING SURFACE	165
BEBOW 2.0 CEILING SURFACE	165
BEBOW 3.0 CEILING SURFACE	167
BEBOW 4.0 CEILING SURFACE	167
BEBOW 1.0 CEILING SUSPENDED	231
BEBOW 2.0 CEILING SUSPENDED	231
BEBOW 3.0 CEILING SUSPENDED	233
BEBOW 4.0 CEILING SUSPENDED	233
BENTA 1.3	301
BENTA 3.6	301
BENTO 1.3	299
BENTO 3.6	299
BISHOP 4.0	237
BISHOP 6.0	237
BISHOP 8.0	237
BLOCK 1.0 HIT	411
BLOCK 1.0 QT-DE	411
BLOCK 2.0 HIT	413
BLOCK 2.0 QT-DE	413
BOX 1.0 LED CEILING SURFACE	147
BOX 1.0 PAR16 CEILING SURFACE	147
BOX 2.0 LED CEILING SURFACE	149
BOX 2.0 PAR16 CEILING SURFACE	149
BOX 2.0 3.0 LED CEILING SUSPENDED	219
BOX 2.0 3.0 PAR16 CEILING SUSPENDED	219
BOX 1.0 LED WALL SURFACE	315
BOX 1.0 QT14 WALL SURFACE	315
BOX 2.0 LED WALL SURFACE	315
BOX 3.0 LED WALL SURFACE	315
BOX MINI 1.0 WALL SURFACE	313
BOX MINI 2.0 WALL SURFACE	313
BOX 1.0 CEILING SURFACE EXTERIOR	345
BOX 1.0 WALL SURFACE EXTERIOR	399
BOX 2.0 WALL SURFACE EXTERIOR	399
BOX 3.0 WALL SURFACE EXTERIOR	399
BOX 4.0 WALL SURFACE EXTERIOR	399
BOXX 1.0	403
CARD 0.1	417
CARD 0.2	417
CARD 0.3	417
CENTRAL 1.0 WALL SURFACE	293
CENTRAL 2.0 WALL SURFACE	293
CENTRAL 1.0 WALL SURFACE EXTERIOR	387
CENTRAL 2.0 WALL SURFACE EXTERIOR	387
CHART 0.6	425
CHART 0.9	425

<i>PRODUCT NAME</i>	<i>PAGE</i>
CHART 1.2	425
CHIP 1.2	427
CHIP 1.6	427
CIRRUS 6.7 CEILING SURFACE	127
CIRRUS 9.7 CEILING SURFACE	127
CIRRUS 6.7 CEILING SUSPENDED	215
CIRRUS 9.7 CEILING SUSPENDED	215
COCOZ ROUND 1.0 HIR111	79
COCOZ ROUND 1.0 LED111	79
COCOZ ROUND 1.0 QR111	79
COCOZ SQUARE 1.0 HIR111	81
COCOZ SQUARE 1.0 LED111	81
COCOZ SQUARE 1.0 QR111	81
CONCRETE TUBE 2.0 4.0	195
CONCRETE TUBE 4.5	195
CONE 1.0	185
CORK 1.0	241
CORY 1.3 CEILING RECESSED	59
CORY 0.9 CEILING RECESSED	59
CORY 1.6 CEILING RECESSED	59
CORY 1.9 CEILING RECESSED	59
CORY 2.1 CEILING RECESSED	61
CORY 2.6 CEILING RECESSED	61
CORY 3.4 CEILING RECESSED	61
CORO 0.8 CEILING RECESSED	63
CORO 1.1 CEILING RECESSED	63
CORO 1.3 CEILING RECESSED	63
CORO 1.4 CEILING RECESSED	63
CORO 1.6 CEILING RECESSED	67
CORO 2.0 CEILING RECESSED	67
CORO 2.5 CEILING RECESSED	67
CORY 1.3 CEILING SURFACE	129
CORY 1.6 CEILING SURFACE	129
CORY 1.9 CEILING SURFACE	129
CORY 2.1 CEILING SURFACE	129
CORY 2.6 CEILING SURFACE	131
CORY 3.4 CEILING SURFACE	131
CORO 1.1 CEILING SURFACE	143
CORO 1.3 CEILING SURFACE	143
CORO 1.4 CEILING SURFACE	143
CORO 1.6 CEILING SURFACE	143
CORO 2.0 CEILING SURFACE	145
CORO 2.5 CEILING SURFACE	145
CORY 6.6 CEILING SUSPENDED	213
CORY 9.6 CEILING SUSPENDED	213
CORY 12.0 CEILING SUSPENDED	213
CURVUS 6.0	325
CURVUS 9.0	325
CURVUS 12.0	325
CURVUS 15.0	325
DEEP 1.0 LED	29
DEEP 1.0 MR16	29
DEEP 1.0 PAR16	29

<i>PRODUCT NAME</i>	<i>PAGE</i>
DEEP ADJUST 1.0 ES111	37
DEEP ADJUST 1.0 LED	33
DEEP ADJUST 1.0 LED111	37
DEEP ADJUST 1.0 MR16	33
DEEP ADJUST 1.0 PAR16	33
DEEP ADJUST 1.0 QR111	37
DEEP ASYM 1.0 LED	41
DEEP ASYM 1.0 MR16	41
DEEP ASYM 1.0 PAR16	41
DEEP IP44 1.0 LED	31
DOCUS 1.0 LED <i>CEILING SURFACE</i>	151
DOCUS 1.0 PAR16 <i>CEILING SURFACE</i>	151
DOCUS 2.0 LED <i>CEILING SURFACE</i>	155
DOCUS 2.0 PAR16 <i>CEILING SURFACE</i>	155
DOCUS 2.0 3.0 LED <i>CEILING SUSPENDED</i>	223
DOCUS 2.0 3.0 PAR16 <i>CEILING SUSPENDED</i>	223
DOCUS 1.0 <i>WALL SURFACE</i>	321
DOCUS 2.0 <i>WALL SURFACE</i>	321
DRUM 1.0	429
DRUM 2.0	429
EDGE 2.0	443
EDGE 4.0	443
EDGE 8.0	443
ELLO SYSTEM 1.0	171
ELLO 13.0	251
EYE 1.0	269
EYE 2.0	269
FIFTY FIFTY 1.0	431
FIFTY FIFTY 2.0	431
FLIP 1.2	423
FLIP 1.6	423
GETTON 1.0 <i>WALL SURFACE EXTERIOR</i>	383
GETTON 2.0 <i>WALL SURFACE EXTERIOR</i>	383
GETTON 1.0 <i>FLOOR SURFACE</i>	451
GETTON 2.0 <i>FLOOR SURFACE</i>	451
GIGANT 10.0	259
GIGANT 16.0	259
GO-ON 1.0 LED111	181
GO-ON 2.0 LED111	181
GO-ON 3.0 LED111	181
HEXO 1.0 LED <i>CEILING SURFACE</i>	157
HEXO 1.0 PAR16 <i>CEILING SURFACE</i>	157
HEXO 2.0 LED <i>CEILING SURFACE</i>	159
HEXO 2.0 PAR16 <i>CEILING SURFACE</i>	159
HEXO 2.0 3.0 LED <i>CEILING SUSPENDED</i>	221
HEXO 2.0 3.0 PAR16 <i>CEILING SUSPENDED</i>	221
HEXO MINI 1.0 <i>WALL SURFACE</i>	323
HEXO MINI 2.0 <i>WALL SURFACE</i>	323
HIDE 1.0 LED	55
HIDE 1.0 LED111	57
HIDE 1.0 PAR16	55
HIDE 1.0 QR111	57
HYDRO 1.0	265

<i>PRODUCT NAME</i>	<i>PAGE</i>
INCH 1.5	305
INCH 2.6	305
INCH 5.4	305
J.J.W. 01	331
J.J.W. 02	333
J.J.W. 03	169
J.J.W. 04	207
J.J.W. 05	211
J.M. 1.0	469
J.M. 2.0	469
KNOB 1.0	359
LEENS 1.0	303
LEENS 2.0	303
LIGHTDROP 1.2	289
LIGHTDROP 1.8	289
LINUS 1.0	449
LINUS 2.0	449
LITO 1.0 <i>CEILING RECESSED</i>	53
LITO 2.0 <i>CEILING RECESSED</i>	53
LITO 1.0 <i>WALL RECESSED</i>	267
LITO 2.0 <i>WALL RECESSED</i>	267
LOUIS 1.0	253
LUNA ROUND 1.0 LED	49
LUNA ROUND 1.0 QT12	49
LYNER 2.5 4.5	193
LYNER 3.8 5.8	193
MACBETH 1.0	257
MAP 0.6	419
MAP 0.9	419
MAP 1.2	419
MILES 12.0	327
MILES 2.0 CARRÉ	327
MILES 9.0	327
MOON 1.0	291
MUST 1.0	139
NOA 2.6	205
NOA 3.5	205
NOA 4.5	205
NOP 1.0 MR16	107
NOP 1.0 PAR16	107
NOTE 0.9	343
NOTE 1.2	343
OBOQ ROUND 1.0 HIR111	83
OBOQ ROUND 1.0 LED111	83
OBOQ ROUND 1.0 QR111	83
OBOQ SQUARE 1.0 HIR111	87
OBOQ SQUARE 1.0 LED111	87
OBOQ SQUARE 1.0 QR111	87
OCTONOM 1.0	255
ORIS 0.7	363
ORIS 1.3	363
ORIS 2.0	363
PACE 4.0	447

INDEX ON PRODUCT NAMES

<i>PRODUCT NAME</i>	<i>PAGE</i>	<i>PRODUCT NAME</i>	<i>PAGE</i>
PACE 6.0	447	RAY MINI 1.0 WALL SURFACE	317
PACE 8.0	447	RAY MINI 2.0 WALL SURFACE	317
PALLUZ C 1.0	455	RAY 1.0 CEILING SURFACE EXTERIOR	347
PALLUZ C 2.0	455	RAY 1.0 WALL SURFACE EXTERIOR	401
PALLUZ O 1.0	457	RAY 2.0 WALL SURFACE EXTERIOR	401
PALLUZ O 2.0	457	RAY 3.0 WALL SURFACE EXTERIOR	401
PALOS 1.0	405	RAY 4.0 WALL SURFACE EXTERIOR	401
PALOS 1.0	439	ROB 1.6 CEILING SURFACE	173
PALOS 2.0	407	ROB 2.6 CEILING SURFACE	173
PALOS 2.0	441	ROB 3.5 CEILING SURFACE	173
PEEK 0.6	95	ROB 1.6 CEILING SURFACE EXTERIOR	349
PEEK 0.8	95	ROB 2.6 CEILING SURFACE EXTERIOR	349
PLANO 1.0 ES111	71	ROB 3.5 CEILING SURFACE EXTERIOR	349
PLANO 1.0 LED	69	ROBY 1.6 CEILING SURFACE	125
PLANO 1.0 LED111	71	ROBY 2.6 CEILING SURFACE	125
PLANO 1.0 PAR16	69	ROBY 3.5 CEILING SURFACE	125
PLANO 1.0 QR111	71	ROBY 2.6 CEILING SUSPENDED	199
PLANO 2.0 LED	69	ROBY 3.5 CEILING SUSPENDED	199
PLANO 2.0 PAR16	69	ROMANCE 3.6	197
PLUXO 1.0 LED	109	RON 1.0 LED	23
PLUXO 1.0 LED111	115	RON 1.0 MR16	23
PLUXO 1.0 PAR16	109	RON 1.0 PAR16	23
PLUXO 2.0 LED	109	RON 2.0 LED	25
PLUXO 2.0 PAR16	109	RON 2.0 PAR16	25
PLUXO 2.0 LED111	115	RON 3.0 LED	27
PLUXO 3.0 LED	111	RON 3.0 PAR16	27
PLUXO 3.0 LED111	115	RONY 1.0 LED	21
PLUXO 3.0 PAR16	111	RONY 1.0 MR16	21
PLUXO 4.0 LED	111	RONY 1.0 PAR16	21
PLUXO 4.0 LED111	115	SCAPE 8.0 CEILING SURFACE EXTERIOR	351
PLUXO 4.0 PAR16	111	SCAPE 11.0 CEILING SURFACE EXTERIOR	351
PLUXO CLUST 2.0 LED111	201	SCAPE 14.0 CEILING SURFACE EXTERIOR	351
PLUXO CLUST 4.0 LED111	201	SCAPE 8.0 WALL SURFACE EXTERIOR	415
PLUXO ON TRACK 1.0 LED111	183	SCAPE 11.0 WALL SURFACE EXTERIOR	415
PLUXO ON TRACK 1.0 PAR16	183	SCAPE 14.0 WALL SURFACE EXTERIOR	415
PLUXO#2 1.0 LED111	117	SCAPE 7.0 FLOOR SURFACE	459
PLUXO#2 1.0 PAR16	113	SCAPE 10.0 FLOOR SURFACE	459
POLAR 1.0	457	SCAPE 13.0 FLOOR SURFACE	459
PYRAMID 1.0 ES111	45	SEEK 1.0 LED	99
PYRAMID 1.0 LED	43	SEEK 2.0 LED	99
PYRAMID 1.0 LED111	45	SEEK 3.0 LED	99
PYRAMID 1.0 PAR16	43	SEEK GAP 1.0 LED	103
PYRAMID 1.0 QR111	45	SEEK GAP 2.0 LED	103
PYRAMID 2.0 LED	43	SEEK GAP 3.0 LED	103
PYRAMID 2.0 PAR16	43	SIRRA 1.0 LED CEILING SURFACE	121
RAY 1.0 LED CEILING SURFACE	163	SIRRA 1.0 PAR16 CEILING SURFACE	121
RAY 1.0 PAR16 CEILING SURFACE	163	SIRRO 1.0 LED CEILING SURFACE	135
RAY 2.0 3.0 LED CEILING SUSPENDED	225	SIRRO 1.0 PAR16 CEILING SURFACE	135
RAY 2.0 3.0 PAR16 CEILING SUSPENDED	225	SIRRO 2.0 LED CEILING SURFACE	137
RAY 1.0 LED WALL SURFACE	319	SIRRO 2.0 PAR16 CEILING SURFACE	137
RAY 1.0 QT14 WALL SURFACE	319	SIRRO 3.0 LED CEILING SURFACE	137
RAY 2.0 LED WALL SURFACE	319	SIRRA 1.0 LED CEILING SUSPENDED	189
RAY 3.0 LED WALL SURFACE	319	SIRRA 1.0 PAR16 CEILING SUSPENDED	189

<i>PRODUCT NAME</i>	<i>PAGE</i>
SIRRO 1.0 LED <i>CEILING SUSPENDED</i>	227
SIRRO 1.0 PAR16 <i>CEILING SUSPENDED</i>	227
SIRRO 2.0 LED <i>CEILING SUSPENDED</i>	229
SIRRO 2.0 PAR16 <i>CEILING SUSPENDED</i>	229
SIRRO 3.0 LED <i>CEILING SUSPENDED</i>	229
SKÖLL 1.0	361
SKÖLL 2.0	361
SLALOM 1.0	91
SMILE 1.0 <i>WALL SURFACE</i>	287
SMILE 2.0 <i>WALL SURFACE</i>	287
SMILE IN 1.0 <i>WALL SURFACE</i>	263
SMILE IN 2.0 <i>WALL SURFACE</i>	263
SMILE ON 1.0 <i>WALL SURFACE</i>	285
SMILE ON 2.0 <i>WALL SURFACE</i>	285
SMILE IN 1.0 <i>WALL RECESSED EXTERIOR</i>	355
SMILE IN 2.0 <i>WALL RECESSED EXTERIOR</i>	355
SMILE ON 1.0 <i>WALL SURFACE EXTERIOR</i>	369
SMILE ON 2.0 <i>WALL SURFACE EXTERIOR</i>	369
SMILE 1.0 <i>WALL SURFACE EXTERIOR</i>	385
SMILE 2.0 <i>WALL SURFACE EXTERIOR</i>	385
SMILE 1.0 <i>FLOOR SURFACE</i>	435
SMILE 2.0 <i>FLOOR SURFACE</i>	435
SOLID 1.0 LED	119
SOLID 1.0 PAR16	119
SPINO 1.0 MR16	93
SPINO 1.0 PAR16	93
SPYDER 1.0 LED	97
SPYDER 1.0 PAR16	97
SQUBE ON BASE 1.0 PAR16	175
SQUBE ON BASE 1.0 LED	175
SQUBE ON TRACK 1.0 PAR16	179
SQUBE ON TRACK 1.0 LED	179
STAKE 1.0	461
STAKE 2.0	461
STAKE FOLD 1.0	463
STAR 1.0	381
STATION 1.0	297
STATION 1.0	391
STATION 2.0	297
STATION 2.0	391
STRANGE 1.0 LED <i>CEILING RECESSED</i>	73
STRANGE 1.0 PAR16 <i>CEILING RECESSED</i>	73
STRANGE 2.0 LED <i>CEILING RECESSED</i>	73
STRANGE 2.0 PAR16 <i>CEILING RECESSED</i>	73
STRANGE 1.0 ES111 <i>CEILING RECESSED</i>	77
STRANGE 1.0 LED111 <i>CEILING RECESSED</i>	77
STRANGE 1.0 QR111 <i>CEILING RECESSED</i>	77
STRANGE 1.7 <i>WALL RECESSED</i>	275
STRANGE 2.7 <i>WALL RECESSED</i>	275
STRANGE 5.0 <i>WALL RECESSED</i>	275
STRANGE CARRÉ 0.8 <i>WALL RECESSED</i>	277
STRANGE CARRÉ 1.7 <i>WALL RECESSED</i>	277
STRANGE CARRÉ 2.7 <i>WALL RECESSED</i>	277

<i>PRODUCT NAME</i>	<i>PAGE</i>
STRIPE 0.4	281
STRIPE 0.7	281
STRIPE 2.2	281
SWAY 1.0	437
SWAY 2.0	437
TAPE 1.0 <i>WALL SURFACE EXTERIOR</i>	397
TAPE 4.0 <i>FLOOR SURFACE</i>	445
TAPE 6.0 <i>FLOOR SURFACE</i>	445
TAPE 8.0 <i>FLOOR SURFACE</i>	445
THEMIS 1.7	271
THEMIS 2.7	271
THEMIS 5.0	271
THEMIS CARRÉ 0.8	273
THEMIS CARRÉ 1.7	273
THEMIS CARRÉ 2.7	273
TRAIN 1.0 <i>WALL SURFACE</i>	311
TRAIN 2.0 <i>WALL SURFACE</i>	311
TRAIN 1.0 <i>WALL SURFACE EXTERIOR</i>	395
TRAIN 2.0 <i>WALL SURFACE EXTERIOR</i>	395
TUBE 1.0 LED	373
TUBE 1.0 PAR16	373
TUBE 2.0 LED	373
TUBE 2.0 PAR16	373
TUBE CARRÉ 1.0	375
TUBE CARRÉ 2.0	375
TUBE CARRÉ 3.0	377
U80 1.0 <i>CEILING SURFACE</i>	141
U80 2.0 <i>CEILING SURFACE</i>	141
U80 1.0 <i>CEILING SUSPENDED</i>	235
U80 2.0 <i>CEILING SUSPENDED</i>	235
UNO 3.0	337
UNO 6.0	337
UNO 9.0	337
WAHAA 1.0	309
WIRO 1.8	245
WIRO 2.0	243
WIRO 3.8	245
WIRO 6.1	245
WIRO 6.5	249
X-BEAM 1.0 <i>WALL SURFACE EXTERIOR</i>	409
X-BEAM 2.0 <i>WALL SURFACE EXTERIOR</i>	409
X-BEAM 1.0 <i>FLOOR PROJECTOR</i>	465
X-BEAM 1.0 <i>FLOOR PROJECTOR</i>	467
X-BEAM 2.0 <i>FLOOR PROJECTOR</i>	465
YARD 10.0	329

INDEX ON PRODUCT NAMES

<i>PRODUCT NAME</i>	<i>PAGE</i>
<i>CEILING RECESSED</i>	
RONY 1.0 LED	21
RONY 1.0 MR16	21
RONY 1.0 PAR16	21
RON 1.0 LED	23
RON 1.0 PAR16	23
RON 2.0 LED	25
RON 2.0 PAR16	25
RON 3.0 LED	27
RON 3.0 PAR16	27
DEEP 1.0 LED	29
DEEP 1.0 MR16	29
DEEP 1.0 PAR16	29
DEEP IP44 1.0 LED	31
DEEP ADJUST 1.0 LED	33
DEEP ADJUST 1.0 MR16	33
DEEP ADJUST 1.0 PAR16	33
DEEP ADJUST 1.0 LED111	37
DEEP ADJUST 1.0 ES111	37
DEEP ADJUST 1.0 QR111	37
DEEP ASYM 1.0 LED	41
DEEP ASYM 1.0 MR16	41
DEEP ASYM 1.0 PAR16	41
PYRAMID 1.0 LED	43
PYRAMID 1.0 PAR16	43
PYRAMID 2.0 LED	43
PYRAMID 2.0 PAR16	43
PYRAMID 1.0 LED111	45
PYRAMID 1.0 ES111	45
PYRAMID 1.0 QR111	45
LUNA 1.0 LED	47
LUNA 1.0 QT12	47
LITO 1.0	53
LITO 2.0	53
HIDE 1.0 LED	55
HIDE 1.0 PAR16	55
HIDE 1.0 LED111	57
HIDE 1.0 QR111	57
CORY 0.9	59
CORY 1.3	59
CORY 1.6	59
CORY 1.9	59
CORY 2.1	61
CORY 2.6	61
CORY 3.4	61
CORO 0.8	63
CORO 1.1	63
CORO 1.3	63
CORO 1.4	63
CORO 1.6	67
CORO 2.0	67
CORO 2.5	67
PLANO 1.0 LED	69

<i>PRODUCT NAME</i>	<i>PAGE</i>
PLANO 1.0 PAR16	69
PLANO 2.0 LED	69
PLANO 2.0 PAR16	69
PLANO 1.0 LED111	71
PLANO 1.0 ES111	71
PLANO 1.0 QR111	71
STRANGE 1.0 LED	73
STRANGE 1.0 PAR16	73
STRANGE 2.0 LED	73
STRANGE 2.0 PAR16	73
STRANGE 1.0 LED111	77
STRANGE 1.0 ES111	77
STRANGE 1.0 QR111	77
COCOZ ROUND 1.0 LED111	79
COCOZ ROUND 1.0 QR111	79
COCOZ ROUND 1.0 HIR111	79
COCOZ SQUARE 1.0 LED111	81
COCOZ SQUARE 1.0 QR111	81
COCOZ SQUARE 1.0 HIR111	81
OBOQ ROUND 1.0 LED111	83
OBOQ ROUND 1.0 QR111	83
OBOQ ROUND 1.0 HIR111	83
OBOQ SQUARE 1.0 LED111	87
OBOQ SQUARE 1.0 QR111	87
OBOQ SQUARE 1.0 HIR111	87
SLALOM 1.0	91
SPINO 1.0 MR16	93
SPINO 1.0 PAR16	93
PEEK 0.6	95
PEEK 0.8	95
SPYDER 1.0 LED	97
SPYDER 1.0 PAR16	97
SEEK 1.0 LED	99
SEEK 2.0 LED	99
SEEK 30 LED	99
SEEK GAP 1.0 LED	103
SEEK GAP 2.0 LED	103
SEEK GAP 3.0 LED	103
NOP 1.0 MR16	107
NOP 1.0 PAR16	107
<i>CEILING SURFACE</i>	
PLUXO 1.0 LED	109
PLUXO 1.0 PAR16	109
PLUXO 2.0 LED	109
PLUXO 2.0 PAR16	109
PLUXO 3.0 LED	111
PLUXO 3.0 PAR16	111
PLUXO 4.0 LED	111
PLUXO 4.0 PAR16	111
PLUXO#2 1.0 PAR16	113
PLUXO 1.0 LED111	115
PLUXO 20 LED111	115
PLUXO 3.0 LED111	115

<i>PRODUCT NAME</i>	<i>PAGE</i>	<i>PRODUCT NAME</i>	<i>PAGE</i>
PLUXO 4.0 LED111	115	ROB 3.5	173
PLUXO#2 1.0 LED111	117	SQUBE ON BASE 1.0 LED	175
SOLID 1.0 LED	119	SQUBE ON BASE	175
SOLID 1.0 PAR16	119	SQUBE ON TRACK 1.0 LED	179
SIRRA 1.0 LED	121	GO-ON 1.0 LED111	181
SIRRA 1.0 PAR16	121	GO-ON 2.0 LED111	181
ROBY 1.6	125	GO-ON 3.0 LED111	181
ROBY 2.6	125	PLUXO ON TRACK 1.0 PAR16	183
ROBY 3.5	125	PLUXO ON TRACK 1.0 LED111	183
CIRRUS 1.0	127	<i>CEILING SUSPENDED</i>	
CIRRUS 2.0	127	CONE 1.0	185
CORY 1.3	129	SIRRA 1.0 LED	189
CORY 1.6	129	SIRRA 1.0 PAR16	189
CORY 1.9	129	LYNER 2.5 4.5	193
CORY 2.1	129	LYNER 2.7 3.7	193
CORY 2.6	131	CONCRETE TUBE 2.0 4.0 LED	195
CORY 3.4	131	CONCRETE TUBE 4.5	195
SIRRO 1.0 LED	135	ROMANCE 3.6	197
SIRRO 1.0 PAR16	135	ROBY 2.6	199
SIRRO 2.0 LED	137	ROBY 3.5	199
SIRRO 2.0 PAR16	137	PLUXO CLUST 2.0 LED111	201
SIRRO 3.0 LED	137	PLUXO CLUST 4.0 LED111	201
MUST 1.0	139	NOA 2.6	205
U80 1.0	141	NOA 3.5	205
U80 2.0	141	NOA 4.5	205
CORO 1.1	143	J.J.W. 04	207
CORO 1.3	143	J.J.W. 05	211
CORO 1.4	143	CORY 6.6	213
CORO 1.6	143	CORY 9.6	213
CORO 2.0	145	CORY 12.0	213
CORO 2.5	145	CIRRUS 1.0	215
BOX 1.0 LED	147	CIRRUS 2.0	215
BOX 1.0 PAR16	147	BOX 2.0 3.0 LED	219
BOX 2.0 LED	149	BOX 2.0 3.0 PAR16	219
BOX 2.0 PAR16	149	HEXO 2.0 3.0 LED	221
DOCUS 1.0 LED	151	HEXO 2.0 3.0 PAR16	221
DOCUS 1.0 PAR16	151	DOCUS 2.0 3.0 LED	223
DOCUS 2.0 LED	155	DOCUS 2.0 3.0 PAR16	223
DOCUS 2.0 PAR16	155	RAY 2.0 3.0 LED	225
HEXO 1.0 LED	157	RAY 2.0 3.0 PAR16	225
HEXO 1.0 PAR16	157	SIRRO 1.0 LED	227
HEXO 2.0 LED	159	SIRRO 1.0 PAR16	227
HEXO 2.0 PAR16	159	SIRRO 2.0 LED	229
RAY 1.0 LED	163	SIRRO 2.0 PAR16	229
RAY 1.0 PAR16	163	SIRRO 3.0 LED	229
BEBOW 1.0	165	BEBOW 1.0	231
BEBOW 2.0	165	BEBOW 2.0	231
BEBOW 3.0	167	BEBOW 3.0	233
BEBOW 4.0	167	BEBOW 4.0	233
J.J.W. 03	169	U80 1.0	235
ELLO LED	171	U80 2.0	235
ROB 1.6	173	BISHOP 4.0	237
ROB 2.6	173	BISHOP 6.0	237

INDEX ON PRODUCT NAMES

<i>PRODUCT NAME</i>	<i>PAGE</i>	<i>PRODUCT NAME</i>	<i>PAGE</i>
BISHOP 8.0	237	LEENS 2.0	303
CORK 1.0	241	INCH 1.5	305
WIRO 2.0	243	INCH 2.6	305
WIRO 1.8	245	INCH 5.4	305
WIRO 3.8	245	ARZY 2.0	307
WIRO 6.1	245	WAHAA 1.0	309
WIRO 6.5	249	TRAIN 1.0	311
ELLO 13.	251	TRAIN 2.0	311
LOUIS 1.0	253	BOX MINI 1.0	313
OCTONOM 1.0	255	BOX MINI 2.0	313
MACBETH 1.0	257	BOX 1.0 LED	315
GIGANT 10.0	259	BOX 1.0 QT14	315
GIGANT 16.0	259	BOX 2.0 LED	315
<i>WALL RECESSED</i>		BOX 3.0 LED	315
SMILE IN 1.0	263	RAY MINI 1.0	317
SMILE IN 2.0	263	RAY MINI 2.0	317
HYDRO 1.0	265	RAY 1.0 LED	319
LITO 1.0	267	RAY 1.0 QT14	319
LITO 2.0	267	RAY 2.0 LED	319
EYE 1.0	269	RAY 3.0 LED	319
EYE 2.0	269	DOCUS 1.0	321
THEMIS 1.7	271	DOCUS 2.0	321
THEMIS 2.7	271	HEXO MINI 1.0	323
THEMIS 5.0	271	HEXO MINI 2.0	323
THEMIS CARRÉ 0.8	273	CURVUS 6.0	325
THEMIS CARRÉ 1.7	273	CURVUS 9.0	325
THEMIS CARRÉ 2.7	273	CURVUS 12.0	325
STRANGE 1.7	275	CURVUS 15.0	325
STRANGE 2.7	275	MILES 2.0 CARRÉ	327
STRANGE 5.0	275	MILES 9.0	327
STRANGE CARRÉ 0.8	277	MILES 12.0	327
STRANGE CARRÉ 1.7	277	YARD 10.0	329
STRANGE CARRÉ 2.7	277	J.J.W. 01	331
STRIPE 0.4	281	J.J.W. 02	333
STRIPE 0.7	281	UNO 3.0	337
STRIPE 2.2	281	UNO 6.0	337
<i>WALL SURFACE</i>		UNO 9.0	337
SMILE ON 1.0	285	<i>EXTERIOR</i>	
SMILE ON 2.0	285	<i>CEILING RECESSED</i>	
SMILE 1.0	287	NOTE 0.9	343
SMILE 2.0	287	<i>CEILING SURFACE</i>	
LIGHTDROP 1.2	289	BOX 1.0	345
LIGHTDROP 1.8	289	RAY 1.0	347
MOON 1.0	291	ROB 1.6	349
CENTRAL 1.0	293	ROB 2.6	349
CENTRAL 2.0	293	ROB 3.5	349
STATION 1.0	297	SCAPE 8.0	351
STATION 2.0	297	SCAPE 11.0	351
BENTO 1.3	299	SCAPE 14.0	351
BENTO 3.6	299	<i>WALL RECESSED</i>	
BENTA 1.3	301	SKÖLL 1.0	361
BENTA 3.6	301	SKÖLL 2.0	361
LEENS 1.0	303	ORIS 0.7	363

<i>PRODUCT NAME</i>	<i>PAGE</i>	<i>PRODUCT NAME</i>	<i>PAGE</i>
ORIS 1.3	363	MAP 0.9	419
ORIS 2.0	363	MAP 1.2	419
ATIM 1.0	365	FLIP 1.2	423
ATIM 2.0	365	FLIP 1.6	423
ATIM CARRÉ 1.0	367	CHART 0.6	425
ATIM CARRÉ 2.0	367	CHART 0.9	425
<i>WALL SURFACE</i>			
SMILE ON 1.0	369	CHART 1.2	425
SMILE ON 2.0	369	CHIP 1.2	427
TUBE 1.0 LED	373	CHIP 1.6	427
TUBE 1.0 PAR16	373	DRUM 1.0	429
TUBE 2.0 LED	373	DRUM 2.0	429
TUBE 2.0 PAR16	373	<i>FLOOR SURFACE</i>	
TUBE CARRÉ 1.0	375	FIFTY FIFTY 1.0	433
TUBE CARRÉ 2.0	375	FIFTY FIFTY 2.0	433
TUBE CARRÉ 3.0	377	SMILE 1.0	437
STAR 1.0	381	SMILE 2.0	437
GETTON 1.0	383	SWAY 1.0	439
GETTON 2.0	383	SWAY 2.0	439
SMILE 1.0	385	PALOS 1.0	441
SMILE 2.0	385	PALOS 2.0	443
CENTRAL 1.0	387	EDGE 2.0	445
CENTRAL 2.0	387	EDGE 4.0	445
STATION 1.0	391	EDGE 8.0	445
STATION 2.0	391	TAPE 4.0	447
TRAIN 1.0	393	TAPE 6.0	447
TRAIN 2.0	393	TAPE 8.0	447
TAPE 1.0	397	PACE 4.0	449
BOX 1.0	399	PACE 6.0	449
BOX 2.0	399	PACE 8.0	449
BOX 3.0	399	LINUS 1.0	451
BOX 4.0	399	LINUS 2.0	451
RAY 1.0	401	GETTON 1.0	453
RAY 2.0	401	GETTON 2.0	453
RAY 3.0	401	PALLUZ O 1.0	455
RAY 4.0	401	PALLUZ O 2.0	455
BOXX 1.0	403	PALLUZ C 1.0	457
PALOS 1.0	405	PALLUZ C 2.0	457
PALOS 2.0	407	POLAR 1.0	459
X-BEAM 1.0	409	SCAPE 7.0	461
X-BEAM 2.0	409	SCAPE 10.0	461
BLOCK 1.0 HIT	411	SCAPE 13.0	461
BLOCK 1.0 QT-DE	411	<i>FLOOR PROJECTOR</i>	
BLOCK 2.0 HIT	413	STAKE 1.0	463
BLOCK 2.0 QT-DE	413	STAKE 2.0	463
SCAPE 8.0	415	STAKE FOLD 1.0	465
SCAPE 11.0	415	X-BEAM 1.0	467
SCAPE 14.0	415	X-BEAM 2.0	467
<i>FLOOR RECESSED</i>			
CARD 0.1	417	X-BEAM 1.0	469
CARD 0.2	417	<i>FLOOR SCULPTURE</i>	
CARD 0.3	417	J.M. 1.0	471
MAP 0.6	419	J.M. 2.0	471
		ALICE 1.0	473
		ALICE 2.0	473

INDEX ON ARTICLE NUMBERS

<i>ARTICLE NUMBER</i>	<i>PRODUCT NAME</i>	<i>PAGE</i>	<i>ARTICLE NUMBER</i>	<i>PRODUCT NAME</i>	<i>PAGE</i>
110161W1	RONY 1.0	21	112361S3	DEEP ADJUST 1.0	33
110161B1	RONY 1.0	21	112361G3	DEEP ADJUST 1.0	33
110161W3	RONY 1.0	21	112361B3	DEEP ADJUST 1.0	33
110161B3	RONY 1.0	21	112361W5	DEEP ADJUST 1.0	33
110161W5	RONY 1.0	21	112361S5	DEEP ADJUST 1.0	33
110161B5	RONY 1.0	21	112361B5	DEEP ADJUST 1.0	33
110110W0	RONY 1.0	21	112310W0	DEEP ADJUST 1.0	33
110110S0	RONY 1.0	21	112310S0	DEEP ADJUST 1.0	33
110110B0	RONY 1.0	21	112310B0	DEEP ADJUST 1.0	33
110120W0	RONY 1.0	21	112320W0	DEEP ADJUST 1.0	33
110120S0	RONY 1.0	21	112320S0	DEEP ADJUST 1.0	33
110120B0	RONY 1.0	21	112320B0	DEEP ADJUST 1.0	33
111161W1	RON 1.0	23	112568W2	DEEP ADJUST 1.0	37
111161B1	RON 1.0	23	112568B2	DEEP ADJUST 1.0	37
111161W3	RON 1.0	23	112568W4	DEEP ADJUST 1.0	37
111161B3	RON 1.0	23	112568B4	DEEP ADJUST 1.0	37
111161W5	RON 1.0	23	112520W0	DEEP ADJUST 1.0	37
111161B5	RON 1.0	23	112520B0	DEEP ADJUST 1.0	37
111110W0	RON 1.0	23	112530W0	DEEP ADJUST 1.0	37
111110S0	RON 1.0	23	112530B0	DEEP ADJUST 1.0	37
111110B0	RON 1.0	23	112461W1	DEEP ASYM 1.0	41
111120W0	RON 1.0	23	112461G1	DEEP ASYM 1.0	41
111120S0	RON 1.0	23	112461B1	DEEP ASYM 1.0	41
111120B0	RON 1.0	23	112461W3	DEEP ASYM 1.0	41
111261W1	RON 2.0	25	112461S3	DEEP ASYM 1.0	41
111261B1	RON 2.0	25	112461G3	DEEP ASYM 1.0	41
111261W3	RON 2.0	25	112461B3	DEEP ASYM 1.0	41
111261B3	RON 2.0	25	112461W5	DEEP ASYM 1.0	41
111261W5	RON 2.0	25	112461S5	DEEP ASYM 1.0	41
111261B5	RON 2.0	25	112461B5	DEEP ASYM 1.0	41
111220W0	RON 2.0	25	112410W0	DEEP ASYM 1.0	41
111220B0	RON 2.0	25	112410S0	DEEP ASYM 1.0	41
111361W3	RON 3.0	27	112410B0	DEEP ASYM 1.0	41
111361B3	RON 3.0	27	112420W0	DEEP ASYM 1.0	41
111361W5	RON 3.0	27	112420S0	DEEP ASYM 1.0	41
111361B5	RON 3.0	27	112420B0	DEEP ASYM 1.0	41
111320W0	RON 3.0	27	113161W3	PYRAMID 1.0	43
111320B0	RON 3.0	27	113161W5	PYRAMID 1.0	43
112161W5	DEEP 1.0	29	113120W0	PYRAMID 1.0	43
112161S5	DEEP 1.0	29	113261W3	PYRAMID 2.0	43
112161B5	DEEP 1.0	29	113261W5	PYRAMID 2.0	43
112110W0	DEEP 1.0	29	113220W0	PYRAMID 2.0	43
112110S0	DEEP 1.0	29	113368W2	PYRAMID 1.0	45
112110B0	DEEP 1.0	29	113368W4	PYRAMID 1.0	45
112120W0	DEEP 1.0	29	113320W0	PYRAMID 1.0	45
112120S0	DEEP 1.0	29	113330W0	PYRAMID 1.0	45
112120B0	DEEP 1.0	29	114181W4	LUNA 1.0	47
112261W5	DEEP IP44 1.0	31	114181I4	LUNA 1.0	47
112261S5	DEEP IP44 1.0	31	114181M4	LUNA 1.0	47
112261B5	DEEP IP44 1.0	31	114181B4	LUNA 1.0	47
112361G1	DEEP ADJUST 1.0	33	1141Q0W0	LUNA 1.0	47
112361B1	DEEP ADJUST 1.0	33	1141Q0I0	LUNA 1.0	47
112361W3	DEEP ADJUST 1.0	33	1141Q0M0	LUNA 1.0	47

<i>ARTICLE NUMBER</i>	<i>PRODUCT NAME</i>	<i>PAGE</i>	<i>ARTICLE NUMBER</i>	<i>PRODUCT NAME</i>	<i>PAGE</i>
1141Q0B0	LUNA 1.0	47	118161W5	PLANO 1.0	69
114281W4	LUNA 2.0	49	118161S5	PLANO 1.0	69
114281I4	LUNA 2.0	49	118120W0	PLANO 1.0	69
114281M4	LUNA 2.0	49	118120S0	PLANO 1.0	69
114281B4	LUNA 2.0	49	118261W3	PLANO 2.0	69
1142Q0W0	LUNA 2.0	49	118261S3	PLANO 2.0	69
1142Q0I0	LUNA 2.0	49	118261W5	PLANO 2.0	69
1142Q0M0	LUNA 2.0	49	118261S5	PLANO 2.0	69
1142Q0B0	LUNA 2.0	49	118220W0	PLANO 2.0	69
145181W4	LITO 1.0	53	118220S0	PLANO 2.0	69
145181A4	LITO 1.0	53	118368W2	PLANO 1.0	71
145181B4	LITO 1.0	53	118368S2	PLANO 1.0	71
145281W4	LITO 2.0	53	118368W4	PLANO 1.0	71
145281A4	LITO 2.0	53	118368S4	PLANO 1.0	71
145281B4	LITO 2.0	53	118320W0	PLANO 1.0	71
117161W3	HIDE 1.0	55	118320S0	PLANO 1.0	71
117161S3	HIDE 1.0	55	118330W0	PLANO 1.0	71
117161B3	HIDE 1.0	55	118330S0	PLANO 1.0	71
117161W5	HIDE 1.0	55	131161W3	STRANGE 1.0	73
117161S5	HIDE 1.0	55	131161B3	STRANGE 1.0	73
117161B5	HIDE 1.0	55	131161W5	STRANGE 1.0	73
117120W0	HIDE 1.0	55	131161B5	STRANGE 1.0	73
117120S0	HIDE 1.0	55	131120W0	STRANGE 1.0	73
117120B0	HIDE 1.0	55	131120B0	STRANGE 1.0	73
117268W2	HIDE 1.0	57	131261W3	STRANGE 2.0	73
117268S2	HIDE 1.0	57	131261B3	STRANGE 2.0	73
117268B2	HIDE 1.0	57	131261W5	STRANGE 2.0	73
117268W4	HIDE 1.0	57	131261B5	STRANGE 2.0	73
117268S4	HIDE 1.0	57	131220W0	STRANGE 2.0	73
117268B4	HIDE 1.0	57	131220B0	STRANGE 2.0	73
117230W0	HIDE 1.0	57	131368W2	STRANGE 1.0	77
117230S0	HIDE 1.0	57	131368B2	STRANGE 1.0	77
117230B0	HIDE 1.0	57	131368W4	STRANGE 1.0	77
126173W4	CORY 0.9	59	131368B4	STRANGE 1.0	77
147173W4	CORY 0.9	59	131320W0	STRANGE 1.0	77
126274W4	CORY 1.3	59	131320B0	STRANGE 1.0	77
126374W4	CORY 1.6	59	131330W0	STRANGE 1.0	77
147373W4	CORY 1.6	59	131330B0	STRANGE 1.0	77
126474W4	CORY 1.9	59	119168J2	COCOZ ROUND 1.0	79
126574W4	CORY 2.1	61	119168U2	COCOZ ROUND 1.0	79
126674W4	CORY 2.6	61	119168J4	COCOZ ROUND 1.0	79
126774W4	CORY 3.4	61	119168U4	COCOZ ROUND 1.0	79
127273W4	CORO 0.8	63	119130J0	COCOZ ROUND 1.0	79
148273W4	CORO 0.8	63	119130U0	COCOZ ROUND 1.0	79
127374W4	CORO 1.1	63	1191H0J0	COCOZ ROUND 1.0	79
127474W4	CORO 1.3	63	1191H0U0	COCOZ ROUND 1.0	79
148473W4	CORO 1.3	63	119268J2	COCOZ SQUARE 1.0	81
127574W4	CORO 1.4	63	119268U2	COCOZ SQUARE 1.0	81
127674W4	CORO 1.6	67	119268J4	COCOZ SQUARE 1.0	81
127774W4	CORO 2.0	67	119268U4	COCOZ SQUARE 1.0	81
127874W4	CORO 2.5	67	119230J0	COCOZ SQUARE 1.0	81
118161W3	PLANO 1.0	69	119230U0	COCOZ SQUARE 1.0	81
118161S3	PLANO 1.0	69	1192H0J0	COCOZ SQUARE 1.0	81

INDEX ON ARTICLE NUMBERS

<i>ARTICLE NUMBER</i>	<i>PRODUCT NAME</i>	<i>PAGE</i>	<i>ARTICLE NUMBER</i>	<i>PRODUCT NAME</i>	<i>PAGE</i>
1192H0U0	COCOZ SQUARE 1.0	81	128661W4	SEEK GAP 3.0	103
120168J2	OBOQ ROUND 1.0	83	128661E4	SEEK GAP 3.0	103
120168E2	OBOQ ROUND 1.0	83	128661B4	SEEK GAP 3.0	103
120168K2	OBOQ ROUND 1.0	83	130210W0	NOP 1.0	107
120168J4	OBOQ ROUND 1.0	83	130210S0	NOP 1.0	107
120168E4	OBOQ ROUND 1.0	83	130220W0	NOP 1.0	107
120168K4	OBOQ ROUND 1.0	83	130220S0	NOP 1.0	107
120130J0	OBOQ ROUND 1.0	83	142164W2	PLUXO 1.0	109
120130E0	OBOQ ROUND 1.0	83	142164S2	PLUXO 1.0	109
120130K0	OBOQ ROUND 1.0	83	142164B2	PLUXO 1.0	109
1201H0J0	OBOQ ROUND 1.0	83	142164W4	PLUXO 1.0	109
1201H0E0	OBOQ ROUND 1.0	83	142164S4	PLUXO 1.0	109
1201H0K0	OBOQ ROUND 1.0	83	142164B4	PLUXO 1.0	109
120268J2	OBOQ SQUARE 1.0	87	142120W0	PLUXO 1.0	109
120268E2	OBOQ SQUARE 1.0	87	142120S0	PLUXO 1.0	109
120268K2	OBOQ SQUARE 1.0	87	142120B0	PLUXO 1.0	109
120268J4	OBOQ SQUARE 1.0	87	142264W2	PLUXO 2.0	109
120268E4	OBOQ SQUARE 1.0	87	142264S2	PLUXO 2.0	109
120268K4	OBOQ SQUARE 1.0	87	142264B2	PLUXO 2.0	109
120230J0	OBOQ SQUARE 1.0	87	142264W4	PLUXO 2.0	109
120230E0	OBOQ SQUARE 1.0	87	142264S4	PLUXO 2.0	109
120230K0	OBOQ SQUARE 1.0	87	142264B4	PLUXO 2.0	109
1202H0J0	OBOQ SQUARE 1.0	87	142220W0	PLUXO 2.0	109
1202H0E0	OBOQ SQUARE 1.0	87	142220S0	PLUXO 2.0	109
1202H0K0	OBOQ SQUARE 1.0	87	142220B0	PLUXO 2.0	109
121110H0	SLALOM 1.0	91	142364W2	PLUXO 3.0	111
121110M0	SLALOM 1.0	91	142364S2	PLUXO 3.0	111
122110H0	SPINO 1.0	93	142364B2	PLUXO 3.0	111
122110M0	SPINO 1.0	93	142364W4	PLUXO 3.0	111
122120H0	SPINO 1.0	93	142364S4	PLUXO 3.0	111
122120M0	SPINO 1.0	93	142364B4	PLUXO 3.0	111
123161W4	PEEK 0.6	95	142320W0	PLUXO 3.0	111
123161E4	PEEK 0.6	95	142320S0	PLUXO 3.0	111
123261W4	PEEK 0.8	95	142320B0	PLUXO 3.0	111
123261E5	PEEK 0.8	95	142464W2	PLUXO 4.0	111
124161W3	SPYDER 1.0	97	142464S2	PLUXO 4.0	111
124161E3	SPYDER 1.0	97	142464B2	PLUXO 4.0	111
124161W5	SPYDER 1.0	97	142464W4	PLUXO 4.0	111
124161E5	SPYDER 1.0	97	142464S4	PLUXO 4.0	111
124120W0	SPYDER 1.0	97	142464B4	PLUXO 4.0	111
124120E0	SPYDER 1.0	97	142420W0	PLUXO 4.0	111
128161W4	SEEK 1.0	99	142420S0	PLUXO 4.0	111
128161B4	SEEK 1.0	99	142420B0	PLUXO 4.0	111
128261W4	SEEK 2.0	99	142520W0	PLUXO #2 1.0	113
128261B4	SEEK 2.0	99	142520S0	PLUXO #2 1.0	113
128361W4	SEEK 3.0	99	142520B0	PLUXO #2 1.0	113
128361B4	SEEK 3.0	99	143168W2	PLUXO 1.0	115
128461W4	SEEK GAP 1.0	103	143168S2	PLUXO 1.0	115
128461E4	SEEK GAP 1.0	103	143168B2	PLUXO 1.0	115
128461B4	SEEK GAP 1.0	103	143168W4	PLUXO 1.0	115
128561W4	SEEK GAP 2.0	103	143168S4	PLUXO 1.0	115
128561E4	SEEK GAP 2.0	103	143168B4	PLUXO 1.0	115
128561B4	SEEK GAP 2.0	103	143268W2	PLUXO 2.0	115

<i>ARTICLE NUMBER</i>	<i>PRODUCT NAME</i>	<i>PAGE</i>	<i>ARTICLE NUMBER</i>	<i>PRODUCT NAME</i>	<i>PAGE</i>
143268S2	PLUXO 2.0	115	139364F5	SIRRO 3.0	137
143268B2	PLUXO 2.0	115	140163W4	MUST 1.0	139
143268W4	PLUXO 2.0	115	140163D4	MUST 1.0	139
143268S4	PLUXO 2.0	115	140163L4	MUST 1.0	139
143268B4	PLUXO 2.0	115	1411T3W0	U80 1.0	141
143368W2	PLUXO 3.0	115	1411T3A0	U80 1.0	141
143368S2	PLUXO 3.0	115	1411T4W0	U80 1.0	141
143368B2	PLUXO 3.0	115	1411T4A0	U80 1.0	141
143368W4	PLUXO 3.0	115	1411M3W0	U80 2.0	141
143368S4	PLUXO 3.0	115	1411M3A0	U80 2.0	141
143368B4	PLUXO 3.0	115	1411M4W0	U80 2.0	141
143468W2	PLUXO 4.0	115	1411M4A0	U80 2.0	141
143468S2	PLUXO 4.0	115	137173W4	CORO 1.1	143
143468B2	PLUXO 4.0	115	137273W4	CORO 1.3	143
143468W4	PLUXO 4.0	115	137373W4	CORO 1.4	143
143468S4	PLUXO 4.0	115	137473W4	CORO 1.6	143
143468B4	PLUXO 4.0	115	137674W4	CORO 2.0	145
143568W2	PLUXO #2 1.0	117	137774W4	CORO 2.5	145
143568S2	PLUXO #2 1.0	117	146164G1	BOX 1.0	147
143568B2	PLUXO #2 1.0	117	146164Q1	BOX 1.0	147
143568W4	PLUXO #2 1.0	117	146164B1	BOX 1.0	147
143568S4	PLUXO #2 1.0	117	146164W2	BOX 1.0	147
143568B4	PLUXO #2 1.0	117	146164L2	BOX 1.0	147
133164W2	SOLID 1.0	119	146164G2	BOX 1.0	147
133164B2	SOLID 1.0	119	146164Q2	BOX 1.0	147
133164W4	SOLID 1.0	119	146164B2	BOX 1.0	147
133164B4	SOLID 1.0	119	146164W4	BOX 1.0	147
133120W0	SOLID 1.0	119	146164L4	BOX 1.0	147
133120B0	SOLID 1.0	119	146164G4	BOX 1.0	147
134164W3	SIRRA 1.0	121	146164Q4	BOX 1.0	147
134164W5	SIRRA 1.0	121	146164B4	BOX 1.0	147
134164E5	SIRRA 1.0	121	146120W0	BOX 1.0	147
134164F5	SIRRA 1.0	121	146120L0	BOX 1.0	147
134120W0	SIRRA 1.0	121	146120G0	BOX 1.0	147
1381T7W0	CIRRUS 6.7	127	146120Q0	BOX 1.0	147
1382T7W0	CIRRUS 9.7	127	146120B0	BOX 1.0	147
136173W4	CORY 1.3	129	146264G1	BOX 2.0	149
136273W4	CORY 1.6	129	146264B1	BOX 2.0	149
136373W4	CORY 1.9	129	146264W2	BOX 2.0	149
136473W4	CORY 2.1	129	146264L2	BOX 2.0	149
136574W4	CORY 2.6	131	146264G2	BOX 2.0	149
136674W4	CORY 3.4	131	146264Q2	BOX 2.0	149
139164W3	SIRRO 1.0	135	146264B2	BOX 2.0	149
139164W5	SIRRO 1.0	135	146264W4	BOX 2.0	149
139164E5	SIRRO 1.0	135	146264L4	BOX 2.0	149
139164F5	SIRRO 1.0	135	146264G4	BOX 2.0	149
139120W0	SIRRO 1.0	135	146264Q4	BOX 2.0	149
139264W3	SIRRO 2.0	137	146264B4	BOX 2.0	149
139264W5	SIRRO 2.0	137	146220W0	BOX 2.0	149
139264E5	SIRRO 2.0	137	146220L0	BOX 2.0	149
139264F5	SIRRO 2.0	137	146220G0	BOX 2.0	149
139220W0	SIRRO 2.0	137	146220Q0	BOX 2.0	149
139364E5	SIRRO 3.0	137	146220B0	BOX 2.0	149

INDEX ON ARTICLE NUMBERS

<i>ARTICLE NUMBER</i>	<i>PRODUCT NAME</i>	<i>PAGE</i>	<i>ARTICLE NUMBER</i>	<i>PRODUCT NAME</i>	<i>PAGE</i>
146364G1	DOCUS 1.0	151	146664B4	HEXO 2.0	159
146364B1	DOCUS 1.0	151	146620W0	HEXO 2.0	159
146364W2	DOCUS 1.0	151	146620G0	HEXO 2.0	159
146364L2	DOCUS 1.0	151	146620Q0	HEXO 2.0	159
146364G2	DOCUS 1.0	151	146620B0	HEXO 2.0	159
146364B2	DOCUS 1.0	151	146764G1	RAY 1.0	163
146364W4	DOCUS 1.0	151	146764Q1	RAY 1.0	163
146364L4	DOCUS 1.0	151	146764B1	RAY 1.0	163
146364G4	DOCUS 1.0	151	146764W2	RAY 1.0	163
146364B4	DOCUS 1.0	151	146764L2	RAY 1.0	163
146320W0	DOCUS 1.0	151	146764G2	RAY 1.0	163
146320L0	DOCUS 1.0	151	146764Q2	RAY 1.0	163
146320G0	DOCUS 1.0	151	146764B2	RAY 1.0	163
146320B0	DOCUS 1.0	151	146764W4	RAY 1.0	163
146464G1	DOCUS 2.0	155	146764L4	RAY 1.0	163
146464B1	DOCUS 2.0	155	146764G4	RAY 1.0	163
146464W2	DOCUS 2.0	155	146764Q4	RAY 1.0	163
146464L2	DOCUS 2.0	155	146764B4	RAY 1.0	163
146464G2	DOCUS 2.0	155	146720W0	RAY 1.0	163
146464B2	DOCUS 2.0	155	146720L0	RAY 1.0	163
146464W4	DOCUS 2.0	155	146720G0	RAY 1.0	163
146464L4	DOCUS 2.0	155	146720Q0	RAY 1.0	163
146464G4	DOCUS 2.0	155	146720B0	RAY 1.0	163
146464B4	DOCUS 2.0	155	132184W4	BEBOW 1.0	165
146420W0	DOCUS 2.0	155	132184B4	BEBOW 1.0	165
146420L0	DOCUS 2.0	155	132164W4	BEBOW 2.0	165
146420G0	DOCUS 2.0	155	132164B4	BEBOW 2.0	165
146420B0	DOCUS 2.0	155	132284W4	BEBOW 3.0	167
146564G1	HEXO 1.0	157	132284B4	BEBOW 3.0	167
146564Q1	HEXO 1.0	157	132264W4	BEBOW 4.0	167
146564B1	HEXO 1.0	157	132264B4	BEBOW 4.0	167
146564W2	HEXO 1.0	157	2051E8S0	J.J.W. 03	169
146564G2	HEXO 1.0	157	2051E8G0	J.J.W. 03	169
146564Q2	HEXO 1.0	157	500184W4	ELLO	171
146564B2	HEXO 1.0	157	500184B4	ELLO	171
146564W4	HEXO 1.0	157	701183W4	ROB 1.6	173
146564G4	HEXO 1.0	157	701183S4	ROB 1.6	173
146564Q4	HEXO 1.0	157	701283W4	ROB 2.6	173
146564B4	HEXO 1.0	157	701283S4	ROB 2.6	173
146520W0	HEXO 1.0	157	701383W4	ROB 3.5	173
146520G0	HEXO 1.0	157	701383S4	ROB 3.5	173
146520Q0	HEXO 1.0	157	144264B1	SQUBE ON BASE 1.0	175
146520B0	HEXO 1.0	157	144264W2	SQUBE ON BASE 1.0	175
146664G1	HEXO 2.0	159	144264B2	SQUBE ON BASE 1.0	175
146664Q1	HEXO 2.0	159	144220W0	SQUBE ON BASE 1.0	175
146664B1	HEXO 2.0	159	144220B0	SQUBE ON BASE 1.0	175
146664W2	HEXO 2.0	159	144164B1	SQUBE ON TRACK 1.0	179
146664G2	HEXO 2.0	159	144164W2	SQUBE ON TRACK 1.0	179
146664Q2	HEXO 2.0	159	144164B2	SQUBE ON TRACK 1.0	179
146664B2	HEXO 2.0	159	144120W0	SQUBE ON TRACK 1.0	179
146664W4	HEXO 2.0	159	144120B0	SQUBE ON TRACK 1.0	179
146664G4	HEXO 2.0	159	116168W2	GO-ON 1.0	181
146664Q4	HEXO 2.0	159	116168S2	GO-ON 1.0	181

<i>ARTICLE NUMBER</i>	<i>PRODUCT NAME</i>	<i>PAGE</i>	<i>ARTICLE NUMBER</i>	<i>PRODUCT NAME</i>	<i>PAGE</i>
116168W4	GO-ON 1.0	181	204183W2	NOA 2.6	205
116168S4	GO-ON 1.0	181	204183B2	NOA 2.6	205
116268W2	GO-ON 2.0	181	204283W2	NOA 3.5	205
116268S2	GO-ON 2.0	181	204283B2	NOA 3.5	205
116268W4	GO-ON 2.0	181	204383W2	NOA 4.5	205
116268S4	GO-ON 2.0	181	204383B2	NOA 4.5	205
116368W2	GO-ON 3.0	181	2052E8S0	J.J.W. 04	207
116368S42	GO-ON 3.0	181	2052E8G0	J.J.W. 04	207
116368W4	GO-ON 3.0	181	2053E8S0	J.J.W. 05	211
116368S4	GO-ON 3.0	181	2053E8G0	J.J.W. 05	211
142620W0	PLUXO ON TRACK 1.0	183	206174W4	CORY 6.6	213
142620B0	PLUXO ON TRACK 1.0	183	206274W4	CORY 9.6	213
143668W2	PLUXO ON TRACK 1.0	183	206374W4	CORY 12.0	213
143668B2	PLUXO ON TRACK 1.0	183	1381T7W0	CIRRUS 6.7	215
143668W4	PLUXO ON TRACK 1.0	183	1382T7W0	CIRRUS 9.7	215
143668B4	PLUXO ON TRACK 1.0	183	207164B1	BOX 2.0/3.0	219
200184W2	CONE 1.0	185	207164W2	BOX 2.0/3.0	219
200184C2	CONE 1.0	185	207164L2	BOX 2.0/3.0	219
200184B2	CONE 1.0	185	207164B2	BOX 2.0/3.0	219
134264W3	SIRRA 1.0	189	207264B1	BOX 2.0/3.0	219
134264E3	SIRRA 1.0	189	207264W2	BOX 2.0/3.0	219
134264W5	SIRRA 1.0	189	207264L2	BOX 2.0/3.0	219
134264E5	SIRRA 1.0	189	207264B2	BOX 2.0/3.0	219
134264F5	SIRRA 1.0	189	207120W0	BOX 2.0/3.0	219
134220W0	SIRRA 1.0	189	207120L0	BOX 2.0/3.0	219
134220E0	SIRRA 1.0	189	207120B0	BOX 2.0/3.0	219
201163W4	LYNER 2.5/4.5	193	207220W0	BOX 2.0/3.0	219
201163L4	LYNER 2.5/4.5	193	207220L0	BOX 2.0/3.0	219
201263W4	LYNER 2.5/4.5	193	207220B0	BOX 2.0/3.0	219
201263L4	LYNER 2.5/4.5	193	207364G1	HEXO 2.0/3.0	221
201363W4	LYNER 2.7/3.7	193	207364Q1	HEXO 2.0/3.0	221
201363L4	LYNER 2.7/3.7	193	207364B1	HEXO 2.0/3.0	221
201463W4	LYNER 2.7/3.7	193	207364G2	HEXO 2.0/3.0	221
201463L4	LYNER 2.7/3.7	193	207364Q2	HEXO 2.0/3.0	221
202163W4	CONCRETE TUBE 2.0/4.0	195	207364B2	HEXO 2.0/3.0	221
202163T4	CONCRETE TUBE 2.0/4.0	195	207464G1	HEXO 2.0/3.0	221
202263W4	CONCRETE TUBE 2.0/4.0	195	207464Q1	HEXO 2.0/3.0	221
202263T4	CONCRETE TUBE 2.0/4.0	195	207464B1	HEXO 2.0/3.0	221
202363W4	CONCRETE TUBE 4.5	195	207464G2	HEXO 2.0/3.0	221
202363T4	CONCRETE TUBE 4.5	195	207464Q2	HEXO 2.0/3.0	221
2031Q8W0	ROMANCE 3.6	197	207464B2	HEXO 2.0/3.0	221
135783W4	ROBY 2.6	199	207320G0	HEXO 2.0/3.0	221
135783L4	ROBY 2.6	199	207320Q0	HEXO 2.0/3.0	221
135883W4	ROBY 3.5	199	207320B0	HEXO 2.0/3.0	221
135883L4	ROBY 3.5	199	207420G0	HEXO 2.0/3.0	221
143864W2	PLUXO CLUST 2.0	201	207420Q0	HEXO 2.0/3.0	221
143864S2	PLUXO CLUST 2.0	201	207420B0	HEXO 2.0/3.0	221
143864W4	PLUXO CLUST 2.0	201	207564B1	DOCUS 2.0/3.0	223
143864S4	PLUXO CLUST 2.0	201	207564W2	DOCUS 2.0/3.0	223
143764W2	PLUXO CLUST 4.0	201	207564L2	DOCUS 2.0/3.0	223
143764S2	PLUXO CLUST 4.0	201	207564G2	DOCUS 2.0/3.0	223
143764W4	PLUXO CLUST 4.0	201	207564B2	DOCUS 2.0/3.0	223
143764S4	PLUXO CLUST 4.0	201	207664B1	DOCUS 2.0/3.0	223

INDEX ON ARTICLE NUMBERS

ARTICLE NUMBER	PRODUCT NAME	PAGE	ARTICLE NUMBER	PRODUCT NAME	PAGE
207664W2	DOCUS 2.0/3.0	223	1412M3A0	U80 2.0	235
207664L2	DOCUS 2.0/3.0	223	1412M4W0	U80 2.0	235
207664G2	DOCUS 2.0/3.0	223	1412M4A0	U80 2.0	235
207664B2	DOCUS 2.0/3.0	223	2181E0D0	BISHOP 4.0	237
207520W0	DOCUS 2.0/3.0	223	2182E0D0	BISHOP 6.0	237
207520L0	DOCUS 2.0/3.0	223	2183E0D0	BISHOP 8.0	237
207520G0	DOCUS 2.0/3.0	223	210163W1	CORK 1.0	241
207520B0	DOCUS 2.0/3.0	223	210163B1	CORK 1.0	241
207620W0	DOCUS 2.0/3.0	223	210163W3	CORK 1.0	241
207620L0	DOCUS 2.0/3.0	223	210163B3	CORK 1.0	241
207620G0	DOCUS 2.0/3.0	223	2096E0V0	WIRO 2.0	243
207620B0	DOCUS 2.0/3.0	223	2096E0B0	WIRO 2.0	243
207764B1	RAY 2.0/3.0	225	2092E0V0	WIRO 1.8	245
207764W2	RAY 2.0/3.0	225	2092E0B0	WIRO 1.8	245
207764L2	RAY 2.0/3.0	225	2093E0V0	WIRO 3.8	245
207764B2	RAY 2.0/3.0	225	2093E0B0	WIRO 3.8	245
207864B1	RAY 2.0/3.0	225	2094E0V0	WIRO 6.1	245
207864W2	RAY 2.0/3.0	225	2094E0B0	WIRO 6.1	245
207864L2	RAY 2.0/3.0	225	2095E0V0	WIRO 6.5	249
207864B2	RAY 2.0/3.0	225	2095E0B0	WIRO 6.5	249
207720W0	RAY 2.0/3.0	225	500284W4	ELLO 13.0	251
207720L0	RAY 2.0/3.0	225	500284B4	ELLO 13.0	251
207720B0	RAY 2.0/3.0	225	211185W2	LOUIS 1.0	253
207820W0	RAY 2.0/3.0	225	2151C0N0	OCTONOM 1.0	255
207820L0	RAY 2.0/3.0	225	212185W4	MACBETH 1.0	257
207820B0	RAY 2.0/3.0	225	212185W6	MACBETH 1.0	257
139564W3	SIRRO 1.0	227	213185W4	GIGANT 10.0	259
139564W5	SIRRO 1.0	227	213185W6	GIGANT 10.0	259
139564E5	SIRRO 1.0	227	213285W4	GIGANT 16.0	259
139564F5	SIRRO 1.0	227	213285W6	GIGANT 16.0	259
139520W0	SIRRO 1.0	227	702151W4	SMILE IN 1.0	263
139664W3	SIRRO 2.0	229	702151L4	SMILE IN 1.0	263
139664W5	SIRRO 2.0	229	703151W4	SMILE IN 2.0	263
139664E5	SIRRO 2.0	229	703151L4	SMILE IN 2.0	263
139664F5	SIRRO 2.0	229	306143W4	HYDRO 1.0	265
139620W0	SIRRO 2.0	229	306143C4	HYDRO 1.0	265
139764W3	SIRRO 3.0	229	306143W6	HYDRO 1.0	265
139764W5	SIRRO 3.0	229	306143C6	HYDRO 1.0	265
139764E5	SIRRO 3.0	229	145181W4	LITO 1.0	267
139764F5	SIRRO 3.0	229	145181A4	LITO 1.0	267
132384W4	BEBOW 1.0	231	145181B4	LITO 1.0	267
132384B4	BEBOW 1.0	231	145281W4	LITO 2.0	267
132364W4	BEBOW 2.0	231	145281A4	LITO 2.0	267
132364B4	BEBOW 2.0	231	145281B4	LITO 2.0	267
132484W4	BEBOW 3.0	233	302151W4	EYE 1.0	269
132484B4	BEBOW 3.0	233	302151L4	EYE 1.0	269
132464W4	BEBOW 4.0	233	302251W4	EYE 2.0	269
132464B4	BEBOW 4.0	233	302251L4	EYE 2.0	269
1412T3W0	U80 1.0	235	303271W4	THEMIS 1.7	271
1412T3A0	U80 1.0	235	303271S4	THEMIS 1.7	271
1412T4W0	U80 1.0	235	303271K4	THEMIS 1.7	271
1412T4A0	U80 1.0	235	303371W4	THEMIS 2.7	271
1412M3W0	U80 2.0	235	303371S4	THEMIS 2.7	271

<i>ARTICLE NUMBER</i>	<i>PRODUCT NAME</i>	<i>PAGE</i>	<i>ARTICLE NUMBER</i>	<i>PRODUCT NAME</i>	<i>PAGE</i>
303371K4	THEMIS 2.7	271	314274W4	STATION 2.0	297
303671W4	THEMIS 5.0	271	314274L4	STATION 2.0	297
303671S4	THEMIS 5.0	271	309274W4	BENTO 1.3	299
303171W4	THEMIS CARRÉ 0.8	273	309274B4	BENTO 1.3	299
303171S4	THEMIS CARRÉ 0.8	273	309374W4	BENTO 3.6	299
303171K4	THEMIS CARRÉ 0.8	273	309374B4	BENTO 3.6	299
303471W4	THEMIS CARRÉ 1.7	273	310174W4	BENTA 1.3	301
303471S4	THEMIS CARRÉ 1.7	273	310174B4	BENTA 1.3	301
303471K4	THEMIS CARRÉ 1.7	273	310274W4	BENTA 3.6	301
303571W4	THEMIS CARRÉ 2.7	273	310274B4	BENTA 3.6	301
303571S4	THEMIS CARRÉ 2.7	273	311174W4	LEENS 1.0	303
303571K4	THEMIS CARRÉ 2.7	273	311174L4	LEENS 1.0	303
304271W4	STRANGE 1.7	275	311174B4	LEENS 1.0	303
304271S4	STRANGE 1.7	275	311274W4	LEENS 2.0	303
304371W4	STRANGE 2.7	275	311274L4	LEENS 2.0	303
304371S4	STRANGE 2.7	275	311274B4	LEENS 2.0	303
304671W4	STRANGE 5.0	275	312164W4	INCH 1.5	305
304671S4	STRANGE 5.0	275	312164L4	INCH 1.5	305
304171W4	STRANGE CARRÉ 0.8	277	312164B4	INCH 1.5	305
304171S4	STRANGE CARRÉ 0.8	277	312264W4	INCH 2.6	305
304471W4	STRANGE CARRÉ 1.7	277	312264L4	INCH 2.6	305
304471S4	STRANGE CARRÉ 1.7	277	312264B4	INCH 2.6	305
304571W4	STRANGE CARRÉ 2.7	277	312364W4	INCH 5.4	305
304571S4	STRANGE CARRÉ 2.7	277	312364L4	INCH 5.4	305
305151W4	STRIPE 0.4	281	312364B4	INCH 5.4	305
305151L4	STRIPE 0.4	281	325163W4	ARZY 2.0	307
305151B4	STRIPE 0.4	281	325163C4	ARZY 2.0	307
305251W4	STRIPE 0.7	281	325163B4	ARZY 2.0	307
305251L4	STRIPE 0.7	281	324173W4	WAHAA 1.0	309
305251B4	STRIPE 0.7	281	324173B4	WAHAA 1.0	309
305351W4	STRIPE 2.2	281	719163W4	TRAIN 1.0	311
305351L4	STRIPE 2.2	281	719163L4	TRAIN 1.0	311
305351B4	STRIPE 2.2	281	719263W4	TRAIN 2.0	311
702253W4	SMILE ON 1.0	285	719263L4	TRAIN 2.0	311
702253L4	SMILE ON 1.0	285	300120W0	BOX MINI 1.0	313
703253W4	SMILE ON 2.0	285	300120L0	BOX MINI 1.0	313
703253L4	SMILE ON 2.0	285	300120B0	BOX MINI 1.0	313
703354W4	SMILE 1.0	287	301120W0	BOX MINI 2.0	313
703354L4	SMILE 1.0	287	301120L0	BOX MINI 2.0	313
703454W4	SMILE 2.0	287	301120B0	BOX MINI 2.0	313
703454L4	SMILE 2.0	287	321164G1	BOX 1.0	315
3071V0W0	LIGHTDROP 1.2	289	321164Q1	BOX 1.0	315
3071V0C0	LIGHTDROP 1.2	289	321164B1	BOX 1.0	315
3072V0W0	LIGHTDROP 1.8	289	321164W4	BOX 1.0	315
3072V0C0	LIGHTDROP 1.8	289	321164L4	BOX 1.0	315
308174W4	MOON 1.0	291	321164G4	BOX 1.0	315
308174L4	MOON 1.0	291	321164Q4	BOX 1.0	315
313174W4	CENTRAL 1.0	293	321164B4	BOX 1.0	315
313174L4	CENTRAL 1.0	293	3211G0W0	BOX 1.0	315
313274W4	CENTRAL 2.0	293	3211G0L0	BOX 1.0	315
313274L4	CENTRAL 2.0	293	3211G0G0	BOX 1.0	315
314174W4	STATION 1.0	297	3211G0Q0	BOX 1.0	315
314174L4	STATION 1.0	297	3211G0B0	BOX 1.0	315

INDEX ON ARTICLE NUMBERS

<i>ARTICLE NUMBER</i>	<i>PRODUCT NAME</i>	<i>PAGE</i>	<i>ARTICLE NUMBER</i>	<i>PRODUCT NAME</i>	<i>PAGE</i>
321144G1	BOX 2.0	315	300320G0	DOCUS MINI 1.0	321
321144Q1	BOX 2.0	315	300320B0	DOCUS MINI 1.0	321
321144B1	BOX 2.0	315	301320W0	DOCUS MINI 2.0	321
321144W4	BOX 2.0	315	301320L0	DOCUS MINI 2.0	321
321144L4	BOX 2.0	315	301320G0	DOCUS MINI 2.0	321
321144G4	BOX 2.0	315	301320B0	DOCUS MINI 2.0	321
321144Q4	BOX 2.0	315	300420G0	HEXO MINI 1.0	323
321144B4	BOX 2.0	315	300420Q0	HEXO MINI 1.0	323
321244G1	BOX 3.0	315	300420B0	HEXO MINI 1.0	323
321244Q1	BOX 3.0	315	301420G0	HEXO MINI 2.0	323
321244B1	BOX 3.0	315	301420Q0	HEXO MINI 2.0	323
321244W4	BOX 3.0	315	301420B0	HEXO MINI 2.0	323
321244L4	BOX 3.0	315	3161T3L0	CURVUS 6.0	325
321244G4	BOX 3.0	315	3162T3L0	CURVUS 9.0	325
321244Q4	BOX 3.0	315	3163T3L0	CURVUS 12.0	325
321244B	BOX 3.0	315	3164T3L0	CURVUS 15.0	325
300220W0	RAY MINI 1.0	317	317173W4	MILES 2.0	327
300220L0	RAY MINI 1.0	317	317173L4	MILES 2.0	327
300220B0	RAY MINI 1.0	317	317173B4	MILES 2.0	327
301220W0	RAY MINI 2.0	317	317274W4	MILES 9.0	327
301220L0	RAY MINI 2.0	317	317274L4	MILES 9.0	327
301220B0	RAY MINI 2.0	317	317274B4	MILES 9.0	327
322164G1	RAY 1.0	319	317374W4	MILES 12.0	327
322164Q1	RAY 1.0	319	317374L4	MILES 12.0	327
322164B1	RAY 1.0	319	317374B4	MILES 12.0	327
322164W4	RAY 1.0	319	3181T3W0	YARD 10.0	329
322164L4	RAY 1.0	319	3181T3S0	YARD 10.0	329
322164G4	RAY 1.0	319	2054E8S0	J.J.W. 01	331
322164Q4	RAY 1.0	319	2054E8G0	J.J.W. 01	331
322164B4	RAY 1.0	319	2055E8S0	J.J.W. 02	333
3221G0W0	RAY 1.0	319	2055E8G0	J.J.W. 02	333
3221G0L0	RAY 1.0	319	31916204	UNO 3.0	337
3221G0G0	RAY 1.0	319	31926204	UNO 6.0	337
3221G0Q0	RAY 1.0	319	31936204	UNO 9.0	337
3221G0B0	RAY 1.0	319	704161E4	NOTE 0.9	343
322144G1	RAY 2.0	319	704261E4	NOTE 1.2	343
322144Q1	RAY 2.0	319	146164W4	BOX 1.0	345
322144B1	RAY 2.0	319	146164D4	BOX 1.0	345
322144W4	RAY 2.0	319	146164B4	BOX 1.0	345
322144L4	RAY 2.0	319	146764W4	RAY 1.0	347
322144G4	RAY 2.0	319	146764D4	RAY 1.0	347
322144Q4	RAY 2.0	319	146764B4	RAY 1.0	347
322144B4	RAY 2.0	319	701183W4	ROB 1.6	349
322244G1	RAY 3.0	319	701183S4	ROB 1.6	349
322244Q1	RAY 3.0	319	701283W4	ROB 2.6	349
322244B1	RAY 3.0	319	701283S4	ROB 2.6	349
322244W4	RAY 3.0	319	701383W4	ROB 3.5	349
322244L4	RAY 3.0	319	701383S4	ROB 3.5	349
322244G4	RAY 3.0	319	7051T3T0	SCAPE 8.0	351
322244Q4	RAY 3.0	319	7052T3T0	SCAPE 11.0	351
322244B4	RAY 3.0	319	7053T3T0	SCAPE 14.0	351
300320W0	DOCUS MINI 1.0	321	702151W4	SMILE IN 1.0	355
300320L0	DOCUS MINI 1.0	321	702151D4	SMILE IN 1.0	355

<i>ARTICLE NUMBER</i>	<i>PRODUCT NAME</i>	<i>PAGE</i>	<i>ARTICLE NUMBER</i>	<i>PRODUCT NAME</i>	<i>PAGE</i>
703151W4	SMILE IN 2.0	355	7131V0I0	STAR 1.0	381
703151D4	SMILE IN 2.0	355	717474W4	GETTON 1.0	383
706143W4	KNOB 1.0	359	717474D4	GETTON 1.0	383
706143T4	KNOB 1.0	359	717374W4	GETTON 2.0	383
706143B4	KNOB 1.0	359	717374D4	GETTON 2.0	383
706143W6	KNOB 1.0	359	703354W4	SMILE 1.0	385
706143T6	KNOB 1.0	359	703354D4	SMILE 1.0	385
706143B6	KNOB 1.0	359	703454W4	SMILE 2.0	385
708143W4	SKÖLL 1.0	361	703454D4	SMILE 2.0	385
708143T4	SKÖLL 1.0	361	313174W4	CENTRAL 1.0	387
708143B4	SKÖLL 1.0	361	313174D4	CENTRAL 1.0	387
708143W6	SKÖLL 1.0	361	313274W4	CENTRAL 2.0	387
708143T6	SKÖLL 1.0	361	313274D4	CENTRAL 2.0	387
708143B6	SKÖLL 1.0	361	314174W4	STATION 1.0	391
708243W4	SKÖLL 2.0	361	314174D4	STATION 1.0	391
708243T4	SKÖLL 2.0	361	314274W4	STATION 2.0	391
708243B4	SKÖLL 2.0	361	314274D4	STATION 2.0	391
708243W6	SKÖLL 2.0	361	719163W4	TRAIN 1.0	395
708243T6	SKÖLL 2.0	361	719163D4	TRAIN 1.0	395
708243B6	SKÖLL 2.0	361	719263W4	TRAIN 2.0	395
709161W4	ORIS 0.7	363	719263D4	TRAIN 2.0	395
709161D4	ORIS 0.7	363	722174W4	TAPE 1.0	397
709261W4	ORIS 1.3	363	722174D4	TAPE 1.0	397
709261D4	ORIS 1.3	363	714164W4	BOX 1.0	399
709361W4	ORIS 2.0	363	714164D4	BOX 1.0	399
709361D4	ORIS 2.0	363	714164B4	BOX 1.0	399
710184I4	ATIM 1.0	365	714144W4	BOX 2.0	399
7101S7I0	ATIM 2.0	365	714144D4	BOX 2.0	399
710284I4	ATIM CARRÉ 1.0	367	714144B4	BOX 2.0	399
7102P0I0	ATIM CARRÉ 2.0	367	714264W4	BOX 3.0	399
702253W4	SMILE ON 1.0	369	714264D4	BOX 3.0	399
702253D4	SMILE ON 1.0	369	714264B4	BOX 3.0	399
703253W4	SMILE ON 2.0	369	714244W4	BOX 4.0	399
703253D4	SMILE ON 2.0	369	714244D4	BOX 4.0	399
711164W4	TUBE 1.0	373	714244B4	BOX 4.0	399
711164D4	TUBE 1.0	373	715164W4	RAY 1.0	401
711120W0	TUBE 1.0	373	715164D4	RAY 1.0	401
711120D0	TUBE 1.0	373	715164B4	RAY 1.0	401
711120B0	TUBE 1.0	373	715144W4	RAY 2.0	401
711264W4	TUBE 2.0	373	715144D4	RAY 2.0	401
711264D4	TUBE 2.0	373	715144B4	RAY 2.0	401
711220W0	TUBE 2.0	373	715264W4	RAY 3.0	401
711220D0	TUBE 2.0	373	715264D4	RAY 3.0	401
711220B0	TUBE 2.0	373	715264B4	RAY 3.0	401
712120W0	TUBE CARRÉ 1.0	375	715244W4	RAY 4.0	401
712120A0	TUBE CARRÉ 1.0	375	715244D4	RAY 4.0	401
712120B0	TUBE CARRÉ 1.0	375	715244B4	RAY 4.0	401
712220W0	TUBE CARRÉ 2.0	375	730144W4	BOXX 1.0	403
712220A0	TUBE CARRÉ 2.0	375	730144D4	BOXX 1.0	403
712220B0	TUBE CARRÉ 2.0	375	730144B4	BOXX 1.0	403
712320W0	TUBE CARRÉ 3.0	377	716174W4	PALOS 1.0	405
712320A0	TUBE CARRÉ 3.0	377	716174D4	PALOS 1.0	405
712320B0	TUBE CARRÉ 3.0	377	716274W4	PALOS 2.0	407

INDEX ON ARTICLE NUMBERS

<i>ARTICLE NUMBER</i>	<i>PRODUCT NAME</i>	<i>PAGE</i>	<i>ARTICLE NUMBER</i>	<i>PRODUCT NAME</i>	<i>PAGE</i>
716274D4	PALOS 2.0	407	722474D4	TAPE 8.0	445
700264D4	X-BEAM 1.0	409	723174W4	PACE 4.0	447
700254D4	X-BEAM 2.0	409	723174D4	PACE 4.0	447
7311Z7T0	BLOCK 1.0	411	723274W4	PACE 6.0	447
7311Z7B0	BLOCK 1.0	411	723274D4	PACE 6.0	447
7312Z7T0	BLOCK 1.0	411	723374W4	PACE 8.0	447
7312Z7B0	BLOCK 1.0	411	723374D4	PACE 8.0	447
7311R0T0	BLOCK 1.0	411	726174D4	LINUS 1.0	449
7313Z7T0	BLOCK 2.0	413	726274D4	LINUS 2.0	449
7313Z7B0	BLOCK 2.0	413	717574D4	GETTON 1.0	451
7314Z7T0	BLOCK 2.0	413	717674D4	GETTON 2.0	451
7314Z7B0	BLOCK 2.0	413	724174D4	PALLUZ O 1.0	451
7313R0T0	BLOCK 2.0	413	724274D4	PALLUZ O 2.0	453
7054T3T0	SCAPE 8.0	415	724374D4	PALLUZ C 1.0	455
7055T3T0	SCAPE 11.0	415	724474D4	PALLUZ C 2.0	455
7056T3T0	SCAPE 14.0	415	7251T7W0	POLAR 1.0	457
750161I4	CARD 0.1	417	7251T7T0	POLAR 1.0	457
750261I4	CARD 0.2	417	7251T7B0	POLAR 1.0	457
750361I4	CARD 0.3	417	7057T3T0	SCAPE 7.0	459
751163I4	MAP 0.6	419	7058T3T0	SCAPE 10.0	459
751264I4	MAP 0.9	419	7059T3T0	SCAPE 13.0	459
751354I4	MAP 1.2	419	727174D4	STAKE 1.0	461
751364I4	MAP 1.2	419	727374D4	STAKE 2.0	461
753164I4	FLIP 1.2	423	727274D4	STAKE FOLD 1.0	463
753254I4	FLIP 1.6	423	700264D4	X-BEAM 1.0	465
753264I4	FLIP 1.6	423	700254D4	X-BEAM 2.0	465
752163I4	CHART 0.6	425	700338T0	X-BEAM 1.0	467
752264I4	CHART 0.9	425	728183D4	J.M. 1.0	469
752354I4	CHART 1.2	425	728283D4	J.M. 2.0	469
752364I4	CHART 1.2	425	729153D4	ALICE 1.0	473
754164I4	CHIP 1.2	427	729253D4	ALICE 2.0	473
754254I4	CHIP 1.6	427			
754264I4	CHIP 1.6	427			
755182X4	DRUM 1.0	429			
755182X6	DRUM 1.0	429			
755182XR	DRUM 1.0	429			
755282XR	DRUM 2.0	429			
756174D4	FIFTY FIFTY 1.0	431			
756274D4	FIFTY FIFTY 2.0	431			
703554D4	SMILE 1.0	435			
703654D4	SMILE 2.0	435			
720174D4	SWAY 1.0	437			
720274D4	SWAY 2.0	437			
716374D4	PALOS 1.0	439			
716474D4	PALOS 2.0	441			
721174D4	EDGE 2.0	443			
721274D4	EDGE 4.0	443			
721374D4	EDGE 8.0	443			
722274W4	TAPE 4.0	445			
722274D4	TAPE 4.0	445			
722374W4	TAPE 6.0	445			
722374D4	TAPE 6.0	445			
722474W4	TAPE 8.0	445			

CONTACT

HEAD OFFICE

WEVER & DUCRÉ BVBA

Kwadestraat 153 – Bus 2.1
8800 Roeselare
Belgium
Phone +32 51 622 650
Fax +32 51 622 695
office@weverducre.com
www.weverducre.com

WEVER & DUCRÉ AUSTRIA

showroom.at@weverducre.com

WEVER & DUCRÉ FRANCE

info.fr@weverducre.com

WEVER & DUCRÉ IBERIA

info.es@weverducre.com

WEVER & DUCRÉ ITALY

info.it@weverducre.com

REPRESENTATIVE OFFICES

WEVER & DUCRÉ ASIA PACIFIC LTD.


RM. 1413, Block A, Sea View Estate
2 Watson Road North Point
Hong Kong
Phone +852 2110 6924
Fax +852 3106 4096
office.hk@weverducre.com
office.cn@weverducre.com

WEVER & DUCRÉ DEUTSCHLAND GMBH

Carlswerkstraße 13 b
51063 Cologne
Germany
Phone +49 221 13 06 496 0
Fax +49 221 13 06 496 9
office.de@weverducre.com

WEVER & DUCRÉ SCHWEIZ GMBH

Rodteggstrasse 22
6005 Luzern
Switzerland
Phone +41 79 443 74 55
Fax +41 44 245 80 99
office.ch@weverducre.com

What's that? A whole new product range, and already several project references? See it this way: Inspiration is key to success in lighting design, so what we care for most is inspiring you and showing you the potential of what we at Wever & Ducré do. Thus, we took the liberty of editing some original images to give you an impression of how our luminaires improve living, office, outdoor, and other spaces. These pictures are marked with an .

The details provided in this catalogue were correct at the time of publication. They do not constitute any kind of obligation on our part and are for information purposes only. We shall not be held liable for any discrepancies between the illustrations or descriptions given and the actual product. The power input of the LEDs is calculated without driver electronics and gear. We reserve the right to make alterations to our products at any time. All orders will be carried out in accordance with the relevant versions of our General Terms of Business and our Terms of Delivery. These can be viewed at www.weverducre.com.

GENERAL COORDINATION

Johan De Smedt, Olaf Konn

COVER

PeachBeach, Berlin (Wall Graffiti)

GRAPHIC DESIGN

Albert Exergian, Carina Erlach, Lisa Hauser, Olaf Konn

PRINT PRODUCTION

Rene Zavadišnik

ILLUSTRATION

Alexandra Maria Kiefer, Julia Stangl

TEXT

Cornelia Pichler, Elena Jost, Olaf Konn, Ulli Felber

LITHOGRAPHY

Volker Waldhauser

COORDINATION

Alexandra Kern, Helena Bäuchler, Thomas Saf, Verena Windisch

PRINTING

Ueberreuter Print GmbH, Industriestraße 1, 2102 Korneuburg, Austria

PHOTOGRAPHY

*Kris Dekeijser (p. 435), Timur Emek (p. 3), Anda Manu (p. 150), Otodesign (p. 258)
Paul Ott (p. 382 | 384 | 390 | 392-393 | 436 | 442 | 460 | 465 | 466),
Gerald Van Rafelghem (p. 26 | 96 | 140 | 180 | 194 | 260-262 | 266 | 300 | 330 | 336),
Studio Augenblick (p. 210 | 330 | 332-335), Studio Dann (p. 253)*



